

Supercharging Olmo-core for Efficient and Scalable MoE Training

Tianhua Tao^{1,2,†,*} Akshita Bhagia¹ Dirk Groeneveld^{1,†} Pete Walsh^{1,†} Tyler Romero^{1,†}

Yashas Samaga^{1,2} Jacob Morrison^{1,2} Iz Beltagy¹ Taira Anderson¹

Noah A. Smith^{1,2} Hannaneh Hajishirzi^{1,2,†}

¹Allen Institute for AI ²University of Washington

*Lead author and primary developer, [†]Work done while at the Allen Institute for AI, see Appendix G for author contributions.

Correspondence tianhuat@cs.washington.edu; olmo@allenai.org

 **Code:** [Olmo-core](#)

Date October 2026

Abstract



Mixture-of-Experts (MoE) models offer more total parameter capacity without proportionally increasing per-token compute: each token activates only a few experts. However, training cost depends not only on active compute but also on many other factors, including bytes moved, memory held, and kernels launched; many of those costs follow total parameter capacity rather than active compute. On infrastructure built for dense models, this mismatch is expensive: in our early baselines, throughput fell as stored expert capacity grew, even though the useful work per token stayed nearly fixed.

To close this gap, we present a redesigned training stack in Olmo-core, which is optimized for efficient and scalable MoE training. We switch from the Fully Sharded Data Parallel (FSDP) used by previous Olmo-core versions to a parallelization architecture built on Distributed Data Parallel (DDP). On top of it, we add Expert Parallelism (EP), Pipeline Parallelism (PP), a distributed optimizer, and activation recompute to support large-scale models.

We bring together a suite of optimizations to make MoE training more efficient. For MoE layers, we propose NVSHMEM-based rowwise EP, which writes each token directly into its expert’s buffer, avoiding permutation overhead in dispatch and combine operations. We make EP fully synchronization-free by keeping routing metadata on the GPU and using device-scheduled grouped GEMMs. Closely integrated MXFP8 raises throughput by cutting compute, activation-memory, and transport costs, and topology-agnostic checkpoints let the parallel layout change between runs.

On NVL8 B300 nodes, the stack supports training configurations from **12.9 billion** to **1.2 trillion** total parameters on up to 512 GPUs, reaching 858 useful-model TFLOP/s/GPU at 1.2 trillion with MXFP8 and per-layer recompute; an experimental capacity test with the optional DeepEP v2 backend reaches **2.38 trillion**.

We also explain the reasoning behind each design choice and share findings that can inform other training systems. For example, we identify a failure pattern we call Token Gerrymandering, in which the MoE router learns to hack the load-balancing loss, and find that overlapping communication with computation can slow the overlapped kernels by more than it hides. These are two of many findings in the report. Together, the stack and these findings offer practical insights into building efficient, scalable MoE training systems.

Statement of AI Assistance

We used AI tools to assist with developing the codebase and kernels, drafting and revising this report, managing experiments, and creating visualizations. The authors retain full responsibility for the report's content. See Appendix G.1 for the role of these tools and our verification approach.

Speed-Read

This report describes the MoE training stack in Olmo-core, the measurements that guided its design, and the approaches we tried but did not adopt. This guide summarizes the main results; the table at the end points to sections for readers interested in a particular problem.

Sparse compute leaves substantial capacity-dependent costs. An MoE model stores many expert networks but sends each token through only a few of them, so the arithmetic per token stays small while the stored model grows. Weight storage, gradient synchronization, and optimizer updates still depend on total parameter count. The full-reshard fully sharded data parallel (FSDP) configuration used for dense Olmo also gathers and frees weights around every microbatch. In our early baselines, adding experts at fixed active size therefore reduced throughput even though the useful work per token barely changed (Figure 4). Section 1.3 names this **capacity tax** and separates it from the **runtime tax** of sparse routing and execution; Section 2 introduces the changes we made to reduce both.

DDP keeps model partitions resident; EP moves selected token rows. The stack replaces the full-reshard FSDP configuration used for dense Olmo with a custom distributed data parallel (DDP) path: each rank keeps its partition of the model in place for the whole accumulation window and synchronizes gradients once per optimizer step, with a distributed optimizer sharding the FP32 main weights and optimizer states (Section 4). Expert parallelism (EP) shards the routed experts across ranks and dispatches only the selected token rows to the rank that stores their expert. Our rowwise intra-node transport writes each token row directly into its destination buffer using GPU-initiated one-sided communication through NVSHMEM, avoiding the host-visible split lists that the block all-to-all path needs. A block-oriented DeepEP v2 backend supports expert groups that span nodes (Section 5). Pipeline parallelism (PP) divides layers when one rank cannot hold them all (Section 6). Section 3 shows how DDP, EP, and PP combine, and Section 7 maps their rank groups onto NVLink and InfiniBand.

GPU-resident metadata removes two recurring host waits. The original MoE path copied routing counts to the CPU for both all-to-all split sizes and expert matrix-multiplication group sizes. Keeping this metadata on the device removes those synchronization points from the steady-state loop (Section 8). Device-scheduled **grouped general matrix multiplication (grouped GEMM)** executes the uneven per-expert shapes produced by routing without padding every expert batch to a common capacity. Section 9 measures where it beats the padded alternative and where it does not.

Routers can lower the balancing loss while worsening imbalance. Section 10 treats routing as a systems problem: what capacity admits, what the load-balancing loss actually optimizes, and how it can reward a failure we call **Token Gerrymandering**, in which the loss improves while imbalance grows (Figure 42).

MXFP8 reduces compute and data-movement costs. MXFP8, an eight-bit format with shared block scales, cuts GEMM time, saved activations, and dispatch payloads, while one FP32 main weight stays authoritative (Section 11).

Checkpoints preserve the model independently of its parallel layout. Checkpoints record the global FP32 tensors independently of the parallel layout, so a run can resume on a different topology (Section 12).

Recompute lets larger recipes fit in memory. Activation recompute reduces the activations retained for the backward pass, lowering peak high-bandwidth memory (HBM) usage. In our controlled comparison, it removes nearly two thirds of activation memory and reduces peak memory by about a quarter, at the cost of about a fifth of throughput. We use it in the larger recipes that would otherwise exceed device memory (Section 13).

The training configurations span 16 to 512 GPUs. Section 14 lists measured operating points, from a 12.9-billion-parameter model on 16 GPUs to a 1.2-trillion-parameter model on 512. These configurations differ in batch, parallelism, precision, and recompute, so their rates are not a controlled scaling curve. Every headline rate there is a systems reference measured under random routing, not a time-to-quality claim; the table states the batch, topology, precision, and recompute policy needed to interpret each number.

Some optimizations traded one cost for another. Section 15 describes approaches we did not adopt: CPU offload of activations that the host link could not carry, and two overlap schemes that competed with

expert compute for GPU resources. It also covers a persistent MoE megakernel that needed a complete training runtime, a natural-layout MXFP8 weight-gradient prototype that was slower than dequantizing its operands first, and CUDA Graph replay whose fixed-address activation buffers could not be reused while earlier pipeline microbatches still needed their contents for backward. These experiments quantify the trade-offs between concurrency, kernel efficiency, and memory use. In particular, overlapping communication with compute can slow concurrent kernels enough to offset—or exceed—the time saved by overlap.

The experiments also inform the training recipe. Critical batch size says when a larger batch still helps but not which learning rate to pair with it, and square-root scaling needed a small empirical correction (Section 16); scaling expert learning rates by sparsity did not help (Section 17). We train from scratch rather than upcycle because, in the published OLMoE study, a dense model’s head start did not persist over a longer run (Section 18). Several ungated shared experts are mathematically one wider shared expert (Section 20), and the rule that merges routed and shared outputs changes the initialization scale (Section 21).

Post-training reuse and comparisons with other systems. Section 22 discusses how the same mechanisms could support supervised fine-tuning, preference training, and reinforcement learning; it is a design discussion rather than a post-training benchmark. Section 23 compares the design against Megatron-Core, DeepSpeed-MoE, and DeepEP in terms of parameter movement, communication, and execution costs. Section 24 summarizes the implications for memory use, throughput, and measurement.

Read the numbers with their conditions. The report uses three kinds of evidence. Production-scale runs report achieved throughput and feasible configurations. Controlled four-GPU experiments with a fixed model, batch, and timing window give the ablations for MXFP8, recompute, and overlap. Kernel and profiler microbenchmarks isolate single mechanisms. GEMM timing depends on the values in the operands, which makes initialization part of any kernel benchmark (Section 19). Appendix A documents the kernel interfaces and profiling method, Appendix B records experiment configurations and metric definitions, and Appendix C defines the terminology; when a term such as *compute weight*, *symmetric memory*, or *dispatch and combine* looks overloaded, the glossary gives the meaning used here. Figure 76 in Appendix D compresses the whole design into one matrix of which method relieves which bottleneck and at what cost.

If you want to	Read
See the headline throughput and exactly what produced it	The panel at the end of Section 2 (p. 19), then Section 14 (p. 103) and Appendix B
Understand why FSDP was replaced for MoE	Sections 1.3, 3, and 4 (pp. 14–29)
Build or debug an MoE trainer	Sections 5, 8, 9, and 12 (from p. 30), with Appendix A as the interface reference
Fit a larger model into memory	Sections 6, 13, and 14, plus the offload budget in Section 15 (p. 105)
Adopt low-precision training	Section 11 (p. 83), then Sections 19 and 15
Diagnose routing or load-balancing behavior	Section 10 (p. 68), with the rank-capacity policy in Section 10.3
Choose the model recipe: learning rate, upcycling, shared experts, merge rule	Sections 16, 17, 18, 20, and 21 (from p. 112)
Reuse the stack for post-training (SFT, preference training, RL)	Section 22 (p. 125)
Compare with Megatron-Core, DeepSpeed-MoE, or DeepEP	Section 23 (p. 127) and Appendix D
Reproduce a measurement	Appendix B (p. 143) for configurations and metrics; Appendix A for profiling method

Reading paths through the report. Each row starts from a reader’s question and lists the sections that answer it, in reading order. Part II covers placement and communication, Part III the execution loop and its measurements, and Part IV the recipe findings and the outlook.

Contents

Speed-Read	3
I Introduction	9
1 Why the Dense Training Assumptions Break	9
1.1 Mixture of Experts (MoE): Sparse Activation	9
1.2 Lower FLOPs Do Not Guarantee Lower Wall Time	11
1.3 Sparse Routing Breaks the Dense Training Assumptions	14
2 Olmo-core DDP Training Stack	17
II Parallelization	20
3 Parallelism Methods Divide Different Work and Storage	20
4 Distributed Data Parallel	21
4.1 DDP Uses Static Compute-Weight Replicas	22
4.2 FSDP Gathers per Microbatch; DDP Synchronizes per Global Step	24
4.3 DDP Alone Hits a Memory Wall	24
4.4 Olmo-Owned DDP	28
4.5 DDP and FSDP Optimize Different Bottlenecks	29
5 Expert Parallelism	30
5.1 EP Shards Models That Do Not Fit	30
5.2 EP Adds Communication to Dispatch and Combine	33
5.3 Packed All-to-All Requires Peer-Contiguous Blocks	34
5.4 Rowwise EP Removes Block Packing	35
5.5 Symmetric Memory Addresses Remote Rows	38
5.6 Routes Use PUT and GET	38
5.7 Buffer Reuse and Ordering Are Explicit in Rowwise EP	39
5.8 DeepEP v2 Provides an Optional EP Backend	41
5.9 Overlap Is Not Free: Resource Contention	42
6 Pipeline Parallelism	44
6.1 Olmo Uses the 1F1B Family	45
6.2 Virtual-Stage Placement Controls Activation Retention	45
6.3 P2P Overlap	46
6.4 PP Delays Reuse of Saved EP Payloads	47
6.5 Runtime Determines Pipeline Throughput	48
7 Mapping Parallelism to Hardware	49
7.1 Rank Order Turns a Mesh into Placement	49
7.2 GPUDirect RDMA Moves Payload; IBGDA Submits Work	50
7.3 Communication Clock Determines Placement Priority	51
7.4 The Tested System Has Eight GPUs per NVLink Domain	51
7.5 Topology Changes the Operating Point	52
III Efficient Training	53
8 Synchronization-Free Training	53
8.1 The CPU Must Stay Ahead of the GPU	54
8.2 Small Work Units Expose Submission Overhead	55

8.3	Critical Microbatch Size	56
8.4	Device-to-Host Synchronization Drains the Queue	57
8.5	How to Become Synchronization-Free	59
9	Grouped GEMM	60
9.1	Routing Creates Uneven GEMMs	61
9.2	Padding, Host Scheduling, and Device Scheduling	61
9.3	Device-Side Offsets Avoid a Host Synchronization	61
9.4	Padded Shape, Unpadded Compute	63
9.5	Forward, Dgrad, and Wgrad Are Different Problems	63
9.6	Rows per Expert Determine the Throughput Crossover	64
10	Routing, Capacity, and Load Balancing	68
10.1	From Top- K Selection to the Executed Workload	68
10.2	The Costs of Imbalance Depend on Where It Appears	69
10.3	Rank-Wide Capacity Bounds Work Without Balancing It	70
10.4	A Shared Rank Budget Drops No More Routes than Matched Expert Budgets	71
10.5	Load-Balancing Scope Is Part of the Training Objective	72
10.6	Auxiliary Gradients and Hard-Count Feedback Are Different Controllers	74
10.7	Token Gerrymandering: The Model Learns to Hack the LBL Objective	75
10.8	Gradient Dynamics and the Joint Objective	79
10.9	Measuring Routing Transients and Outcomes	82
11	MXFP8 Training	83
11.1	Benefits of MXFP8 Training	84
11.2	Understanding the MXFP8 Format	86
11.3	Challenges in MXFP8 Training	88
11.4	The Olmo MXFP8 Recipe for MoE	92
11.5	Throughput Benchmark	95
12	Topology-Agnostic Checkpoint Saving and Loading	97
12.1	Checkpoint Tensors Are Topology-Independent	98
12.2	Low-Memory Online Conversion	98
12.3	Topology Changes and Model Conversion	99
13	Activation Recompute	99
13.1	Choosing Recompute Granularity	100
13.2	Recomputing a Routed Block Repeats Its Communication	101
13.3	Composition with Pipeline Schedules	101
13.4	Measured Memory–Throughput Trade-Off	102
13.5	Choosing a Recompute Policy	103
14	Production Training Throughput	103
14.1	Production Run Matrix	103
14.2	Throughput Across Model Sizes	104
15	Optimization Attempts and Lessons	105
15.1	CPU Activation Offload Was Limited by PCIe	106
15.2	Wave Overlap Was Not a Reliable Win	107
15.3	Two-Batch Overlap	107
15.4	The MegaMoE Kernel Became a Runtime Project	109
15.5	Wgrad Needed a Different Scale Layout	109
15.6	Static CUDA Graphs Need Pipeline-Aware Storage	110
15.7	Local Savings Must Survive the Training Schedule	111

IV Findings and Outlook	112
16 Learning Rate Scaling with Global Batch Size	112
16.1 Critical Batch Size Defines the Useful Batch Regime	112
16.2 Adam Does Not Imply One Universal Exponent	113
16.3 An Empirical Exponent of 0.53 Smoothed Batch Transitions	114
17 Scaling Expert Learning Rate with Sparsity Did Not Help	115
18 Why We Do Not Upcycle	115
19 GEMM Timing Depends on Operand Values	116
19.1 Operand-Dependent Hardware Behavior Has Prior Evidence	117
19.2 Possible Mechanisms and Their Evidence	117
19.3 Use the Same Initialization in Every Comparison	118
20 One Shared Expert Is All You Need	118
20.1 The Collapse Is Exact	119
20.2 Dynamic Gates Preserve Expert Identity	119
20.3 Expert Count Is Not Shared Capacity	121
20.4 Shared and Routed Widths Are Independent	121
21 Merging Routed and Shared Expert Activations	121
21.1 A Dense MLP Provides the Scale Reference	122
21.2 Predicting Variance at Initialization	123
21.3 The Measured Forward and Backward Scales Agree	123
21.4 Scope of the Initialization Result	124
22 Beyond Pretraining	125
22.1 Response-Only Supervision Uses Label Masking	125
22.2 Preference Training Scores Two Sequences Against a Reference	125
22.3 RLVR Adds Systems Outside the Learner	127
22.4 Supervised and Routed Token Rates Measure Different Work	127
23 Related MoE Systems Make Different Trade-Offs	127
23.1 Conditional Compute Shifts Work to Systems	127
23.2 Token and Weight Movement Costs Differ	128
23.3 Route Representations Trade Compactness for Regularity	129
23.4 Placement Determines Replica Groups	129
23.5 Conversion Costs and Communication-Compute Interference	130
23.6 Expert Placement Connects Token Movement and Updates	130
24 Conclusion	130
24.1 Reducing Costs That Repeat Across the Step	131
24.2 What the Measurements Do and Do Not Establish	131
24.3 Precision, Memory, and Scheduling Interact	131
24.4 What Carries Forward	132
Acknowledgments	132
Appendices	133
A Kernel Interfaces and Profiling Reference	133
A.1 Rowwise Dispatch and Combine Use PUT/GET	133
A.2 Rowwise Wrappers Enforce Runtime Requirements	134
A.3 CUDA/NVSHMEM Kernels Operate per Route	134

A.4	FP8 Transport Requires Compatible Layouts	134
A.5	Blackwell MXFP8 Uses Block-Scaled Tensor Core MMA	135
A.6	Availability of Device-Side Grouped GEMM	135
A.7	Common Grouped-GEMM Shapes in Training	136
A.8	Equal Compute Can Require More HBM Traffic	137
A.9	The Maximum Load Does Not Specify the Expert Histogram	139
A.10	Grouped-GEMM Capacity Benchmark Details	139
A.11	Matched Grouped-Dense Projection Benchmark	140
A.12	Very Large Grouped GEMMs Enter a Power-Limited Clock Regime	140
A.13	Grouped Kernels Accept Managed Buffers	141
A.14	Fused FP8 Autograd Saves the Values Needed by Backward	142
A.15	Some Kernel Prototypes Are Not Integrated	143
A.16	Kernel Profiles Separate Transport and Compute Costs	143
B	Reproducible Experiment Configurations and Metrics	143
B.1	Audited Hardware and Software	143
B.2	Audited Workload Roles	144
B.3	The Main FSDP Comparison Uses Full Resharding	144
B.4	Reduced Profiling Changes the Workload	144
B.5	Captured Submission-Regime Profiles	145
B.6	Verifying the Sync-Free Path	145
B.7	Checkpoint-Branched LBL-Coefficient Runs	147
B.8	Batch-Size Warmup Run	148
B.9	Experiment Artifact Contents	148
B.10	Production-Throughput Run Details	149
B.11	Metrics Track Useful Work, Time, and Memory	150
C	Glossary of Parallelism, Routing, and Training Storage	151
C.1	Parallel Dimensions and Mesh Axes	151
C.2	Model Capacity and Routing Quantities	152
C.3	Runtime Buffers and Reuse Terms	152
C.4	Optimizer and Checkpoint Terms	153
D	System Method Trade-Off Matrix	153
E	Expert-Merge Normalization in Public MoE Models	155
F	Context Parallelism and MoE Parallel Folding	155
G	Author Contributions	157
G.1	Use of AI Tools	157
	References	158

Part I

Introduction

1 Why the Dense Training Assumptions Break

1.1 Mixture of Experts (MoE): Sparse Activation

MoE separates total and active parameters. In a dense Transformer block (Vaswani et al., 2017), every token—one position in the input sequence—is processed by the same feed-forward network (FFN). Making that FFN larger gives the model more capacity and increases computation for every token. MoE adds parameter capacity while using only a subset of it for each token.

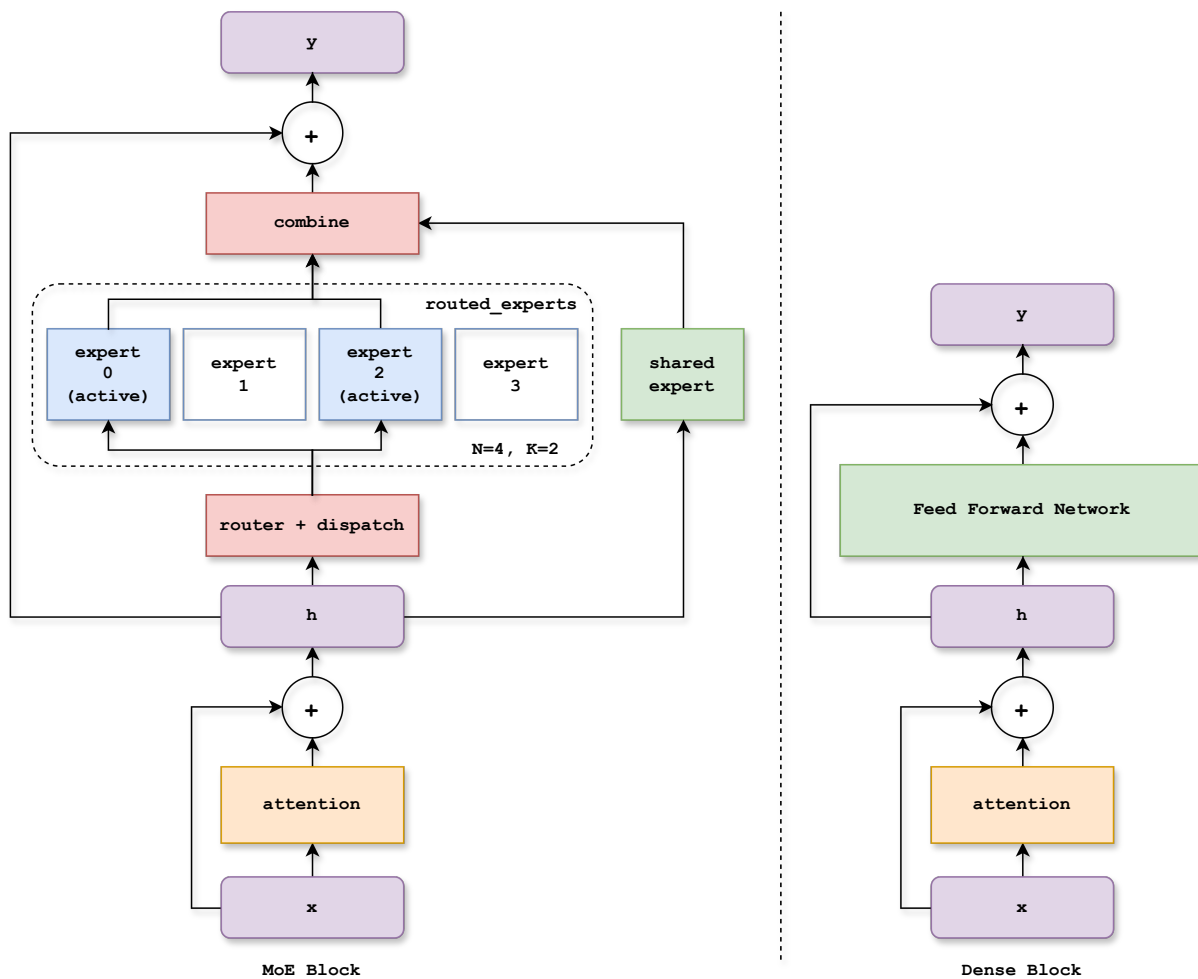


Figure 1 MoE and Dense Transformer blocks. Both blocks retain attention and residual connections. The dense block (right) applies the same feed-forward network to every token. The MoE block (left) illustrates one token routed to $K = 2$ of $N = 4$ routed experts—experts 0 and 2 in this example—and combines their outputs with an optional always-active shared expert before the residual addition. Here, $K = 2$ is a per-token choice. Other tokens can select different experts, so a training batch can collectively use all N experts.

MoE changes this part of the block. Instead of one FFN, an MoE layer contains a pool of separately parameterized FFNs called **experts**. A small learned **router**, or gate, decides which experts should process each token.

Each token selects a few experts. The router scores the N available experts and chooses the top K . The runtime sends—or **dispatches**—the token’s vector to those selected experts. Each selected expert applies its FFN to the vector. The router supplies a combination weight for each selected expert, and the **combine** operation multiplies the expert outputs by those weights, sums them, and restores the result to the token’s original sequence position. The router and experts learn together with the rest of the model. This sparse-gated pattern was established by early large-scale MoE work and later simplified by the Switch Transformer (Shazeer et al., 2017; Fedus et al., 2022).

For token representation x_t , let S_t be the selected expert set, let $p_{t,e}$ be expert e ’s combination weight, and let f_e be that expert’s FFN. Then

$$y_t^{\text{routed}} = \sum_{e \in S_t} p_{t,e} f_e(x_t), \quad |S_t| = K \ll N. \quad (1)$$

Some MoE blocks also include a **shared expert**, an FFN that every token uses alongside its selected routed experts. Attention, embeddings, normalization, the router, and any shared expert also remain active when most routed experts do not. And because the router’s choices depend on the input, experts do not necessarily receive equal numbers of tokens. Training systems use load-balancing objectives and capacity limits to keep one expert from becoming an unbounded hotspot (Shazeer et al., 2017; Fedus et al., 2022; Dai et al., 2024).

Consider a layer with $N = 128$ routed experts and $K = 4$. The model has 128 routed expert FFNs, yet a single token uses only four of them. We therefore distinguish the model’s total parameter count from the number of parameters active for one token.

Sparse Capacity Without Dense Computation

Here, N is the total number of routed experts and K is the number selected for one token. Let P_{always} denote the parameters used by every token—attention, embeddings, routers, norms, shared experts, and the language-model output head—and let P_{expert} denote the parameters in one routed expert. In a simplified per-token accounting,

$$\begin{aligned} P_{\text{total}} &= P_{\text{always}} + NP_{\text{expert}}, \\ P_{\text{active}} &= P_{\text{always}} + KP_{\text{expert}}. \end{aligned} \quad (2)$$

We use two activation ratios:

$$\begin{aligned} \alpha_E &= \frac{K}{N} && \text{(expert activation ratio),} \\ \alpha_P &= \frac{P_{\text{active}}}{P_{\text{total}}} && \text{(parameter activation ratio).} \end{aligned} \quad (3)$$

In the $N = 128$, $K = 4$ example, a token uses 3.125% of the routed experts—not 3.125% of the whole model, because the always-active path still participates. Holding expert shape fixed, routed capacity grows with N , while routed expert computation per token grows with K .

This per-token accounting only approximates total model FLOPs, because attention, routing, shared branches, and auxiliary work also contribute. Sparse activation still allows substantially more parameter capacity without a proportional increase in per-token computation. Different token paths may also encourage experts to learn different functions, although useful specialization is neither guaranteed nor assigned by hand.

Models are getting larger—and sparser. A visible design trend among recent high-capacity MoEs is to grow total expert capacity faster than the active parameter count. The cleanest evidence comes from comparisons within one model family: from DeepSeek-V3 to DeepSeek-V4-Pro, and from Qwen3-235B-A22B to Qwen3.5-397B-A17B, total parameters grow substantially while the active count grows far less or even

falls, so the advertised parameter activation ratio drops (DeepSeek-AI et al., 2024, 2026; Yang et al., 2025; Qwen Team, 2026b).

Table 1 places those examples among their contemporaries. It is deliberately a design survey rather than a leaderboard: model objectives, layer types, and parameter-counting conventions differ, and neither activation ratio alone measures end-to-end efficiency.

Model and primary source	Year	Routed experts	α_E	Parameters	α_P
		N/K		total/active	
Mixtral 8x7B (Jiang et al., 2024a; Mistral AI Team, 2023)	2023	8/2	25.0%	47B/13B	27.7%
DBRX (Databricks AI Research Team, 2024)	2024	16/4	25.0%	132B/36B	27.3%
Snowflake Arctic (Snowflake AI Research, 2024)	2024	128/2	1.56%	480B/17B	3.54%
OLMoE-1B-7B (Muennighoff et al., 2024)	2024	64/8	12.5%	6.9B/1.3B	18.8%
DeepSeek-V3 (DeepSeek-AI et al., 2024)	2024	256/8 +1S	3.13%	671B/37B	5.51%
Qwen3-235B-A22B (Yang et al., 2025)	2025	128/8	6.25%	235B/22B	9.36%
Llama 4 Maverick (Meta AI, 2025)	2025	128/1 +1S	0.78%	400B/17B	4.25%
gpt-oss-20b (OpenAI, 2025)	2025	32/4	12.5%	20.91B/3.61B	17.3%
gpt-oss-120b (OpenAI, 2025)	2025	128/4	3.13%	116.8B/5.13B	4.39%
DeepSeek-V4-Pro (DeepSeek-AI et al., 2026)	2026	384/6 +1S	1.56%	1.60T/49B	3.06%
Gemma 4 26B A4B (Gemma Team, 2026)	2026	128/8 +1S	6.25%	25.2B/3.8B	15.1%
GLM-5 (GLM-5 Team et al., 2026)	2026	256/8 +1S	3.13%	744B/40B	5.38%
Kimi K2.5 (Moonshot AI, 2026)	2026	384/8 +1S	2.08%	1.00T/32B	3.20%
MiMo-V2.5-Pro (Xiaomi MiMo Team, 2026)	2026	384/8	2.08%	1.02T/42B	4.12%
MiniMax-M3 (MiniMax, 2026)	2026	128/4 +1S	3.13%	~428B/~23B	~5.37%
Nemotron 3 Ultra (NVIDIA, 2026g)	2026	512/22 +1S	4.30%	550B/55B	10.0%
Qwen3.5-397B-A17B (Qwen Team, 2026b)	2026	512/10 +1S	1.95%	397B/17B	4.28%
Qwen3.5-35B-A3B (Qwen Team, 2026a)	2026	256/8 +1S	3.13%	35B/3B	8.57%
GLM-5.2 (Z.ai, 2026)	2026	256/8 +1S	3.13%	744B/40B	5.38%
Kimi K3 (Kimi Team, 2026)	2026	896/16 +2S	1.79%	2.80T/104B	3.71%

Table 1 Selected publicly documented MoE models, ordered by initial release year. The N/K column gives total and active *routed* experts; $+nS$ denotes n additional always-active shared experts. $\alpha_E = K/N$, while α_P uses the creators’ published active and total parameter counts. B and T denote 10^9 and 10^{12} parameters. Parameter counts are often rounded, and conventions for embeddings, output heads, multimodal towers, MTP heads, shared experts, and dense layers are not fully standardized; α_P is therefore approximate even when no approximation symbol is shown.

For the routed language models they study, Clark et al. (2022) show that total parameter count and per-token computation form distinct scaling axes. Fitted scaling laws for fine-grained MoEs further predict that compute-optimal MoE configurations reach lower validation loss than dense Transformers at the same training-FLOP budget, with the predicted advantage widening at larger budgets (Ludziejewski et al., 2024). Yet more sparsity is not automatically better: the best sparsity level depends on constraints such as total parameter count and training compute (Abnar et al., 2025). These results indicate that well-configured MoEs can improve the compute-quality frontier, although a given MoE need not beat a dense model at matched FLOPs.

1.2 Lower FLOPs Do Not Guarantee Lower Wall Time

Useful model FLOPs account for arithmetic but leave out much of the work required to train an MoE. The training system must also move weights and token activations, synchronize ranks, and absorb load imbalance. Those costs determine how many GPU-hours it actually takes to reach the desired quality.

Let F be the useful model FLOPs needed to reach a declared training or quality target, R the realized throughput in useful model FLOPs per GPU-hour under the same accounting convention, and H the GPU-hours consumed. We compare the GPU-hours required by MoE with those required by dense training to reach the same target:

$$\rho_H \equiv \frac{H_{\text{MoE}}}{H_{\text{dense}}} = \frac{F_{\text{MoE}}}{F_{\text{dense}}} \frac{R_{\text{dense}}}{R_{\text{MoE}}}. \quad (4)$$

Here $\rho_H < 1$ means MoE uses fewer GPU-hours than dense training; for example, $\rho_H = 0.5$ means half as many. For runs using the same number of GPUs, ρ_H is also the elapsed wall-time ratio.


The first factor captures **algorithmic efficiency**: a smaller $F_{\text{MoE}}/F_{\text{dense}}$ means fewer useful FLOPs are needed to reach the target. The scaling results above suggest that a well-configured MoE can reduce this factor in the regimes they study. The second factor captures the **throughput penalty**: when MoE sustains lower useful-FLOP throughput than dense training, $R_{\text{dense}}/R_{\text{MoE}} > 1$. This penalty can erase the algorithmic gain (Figure 3).

Equal FLOPs can require more HBM traffic. Compared with a dense FFN of equal active compute, an MoE reads more weights from high-bandwidth memory (HBM), each reused by fewer tokens. Materialized top- K routes also give grouped GEMM K input rows and K final output rows per original token; combine happens after those outputs are written. A **roofline** estimates the throughput ceiling imposed by arithmetic and HBM traffic (Austin et al., 2025). Figure 2 shows how the extra bytes lower MoE’s modeled ceiling at small batches, even before routing or communication time is added. More tokens per expert amortize the weight reads: both curves eventually reach the same compute ceiling. Appendix A.8 derives the comparison; Section 9.6 measures how actual kernel efficiency changes with rows per expert.

Same FLOPs, more HBM traffic

BF16 | 64 experts, top-4

(a) HBM traffic at equal FLOPs

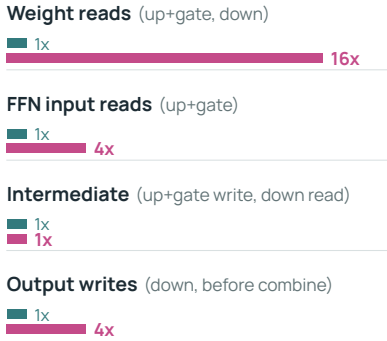

Each category: dense = 1x

Analytical HBM model, not measured throughput. Up+gate and down GEMMs only; excludes activation and routing costs.

(b) Roofline ceiling vs. token batch

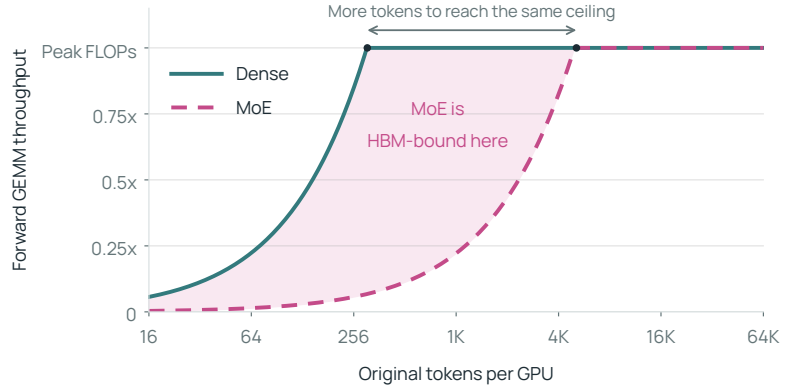


Figure 2 Equal FLOPs do not imply equal HBM traffic. The forward fused up/gate and down GEMMs of a dense FFN with hidden width Kh are compared with N experts of hidden width h , selecting K per token. Here $N = 64$, $K = 4$, and input and expert hidden widths are $d = h = 4096$. **(a)** GEMM-side HBM byte categories, each normalized separately to dense. These ratios are not additive: each category contributes according to its absolute byte volume, not equally. The intermediate row counts up/gate output writes and down input reads, excluding the pointwise activation’s own accesses. **(b)** Analytical ceilings in bfloat16 (BF16), normalized to peak FLOPs, with balanced routes and one HBM read/write per operand/result. Each curve adds the two GEMM times; pointwise activation, packing, combine, network, and backward costs are excluded. Conceptual illustration with no measured quantities; assumptions are detailed in Appendix A.8.

Model FLOPs utilization (MFU) reports useful model throughput as a fraction of a stated hardware peak (Chowdhery et al., 2023). Our complete-step results in Section 14 use the B300’s dense BF16 Tensor Core peak as a common denominator (NVIDIA, 2026r), including for MXFP8 runs; those values are not utilization of the FP8 peak. Appendix B.11 gives the accounting.

An expert unused by one token contributes no expert arithmetic for that token, but its parameters and optimizer states still consume memory. Depending on the parallelization method, gradient reduction and weight synchronization can also scale with total expert capacity. Expert placement determines how far a routed token must travel. Routing itself adds work: count assignments, enforce capacity, move or permute token rows, run experts on the devices that store them, restore token order, and cope with imbalance. Useful model-FLOP accounting excludes most of this work.

Efficient infrastructure preserves the compute frontier in wall time

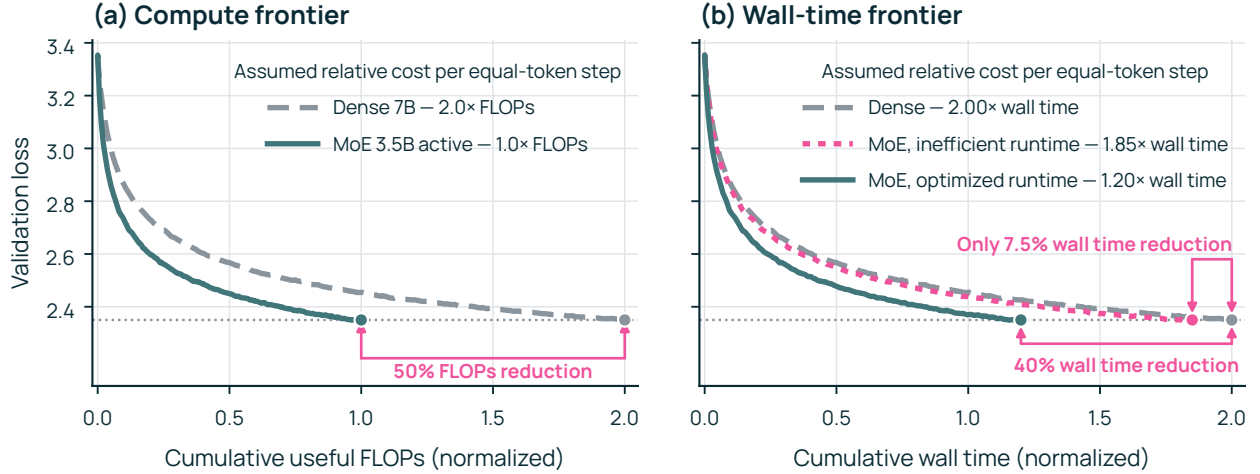


Figure 3 A FLOP advantage can shrink or survive in wall time. This illustrative, simplified comparison uses two power-law-shaped loss traces that run for 10,000 equal-token steps and end at the same loss. Panel (a) assigns the 3.5B-active/13B-total MoE a normalized useful-FLOP cost of 1 per step, versus 2 for the 7B dense model. Panel (b) maps the same MoE loss samples onto two hypothetical runtimes: normalized wall-time costs of 1.85 for inefficient infrastructure and 1.2 for optimized infrastructure, versus 2 for dense. The corresponding time-to-target advantages are only $2/1.85 \approx 1.08\times$ and $2/1.2 \approx 1.67\times$. All costs and loss curves are illustrative assumptions, not measurements or predictions for an Olmo run.

We observed low realized throughput in two early development baselines. One used a straightforward MoE configuration in Megatron-LM, NVIDIA’s distributed Transformer training framework (Shoeybi et al., 2019).¹ The other used the legacy MoE path in Olmo-core, Ai2’s training library for the Olmo model family; that path inherited fully sharded data parallel (FSDP), the parameter-sharding mechanism used for dense Olmo 3 training (Team Olmo et al., 2025) and described in Section 4. Both suggested that low realized throughput could consume much of the advantage predicted by active-FLOP accounting.

A controlled eight-layer experiment reproduces the Olmo-side slowdown. Figure 4 holds top- K and active size nearly fixed while increasing total routed-expert capacity.² The legacy FSDP-based path loses throughput as total capacity grows, even though useful expert arithmetic per token stays nearly constant. The new distributed data parallel (DDP; Section 4) path with expert parallelism (EP; Section 5) degree 8 retains most of its dense throughput across the same capacity range. Active-FLOP accounting alone does not predict this difference.

Figure 4 compares the old FSDP-based Olmo training stack with the new DDP+EP stack, changing several components together. It therefore does not isolate the benefit of DDP or EP alone, or rank Olmo against other training frameworks. It motivates the systems question pursued by this report: which costs continue to grow with total expert capacity, and how the training stack can keep them from dominating wall time.

From FLOPs to GPU-Hours

An MoE’s lower useful-FLOP requirement reduces GPU-hours only if its realized throughput is high enough to preserve that advantage.

¹This observation concerns a specific earlier Megatron-LM configuration, not current Megatron-Core. The recent Megatron-Core MoE report documents DeepEP and HybridEP token-dispatch backends, overlap of expert-parallel communication with computation from adjacent microbatches, and reduced-precision training in FP8 and FP4 (Yan et al., 2026).

²For this illustrative systems comparison, all MoE runs use random routing to approximate balanced expert loads. Production routing is data-dependent and generally less balanced, so its throughput can be lower than this idealized case.

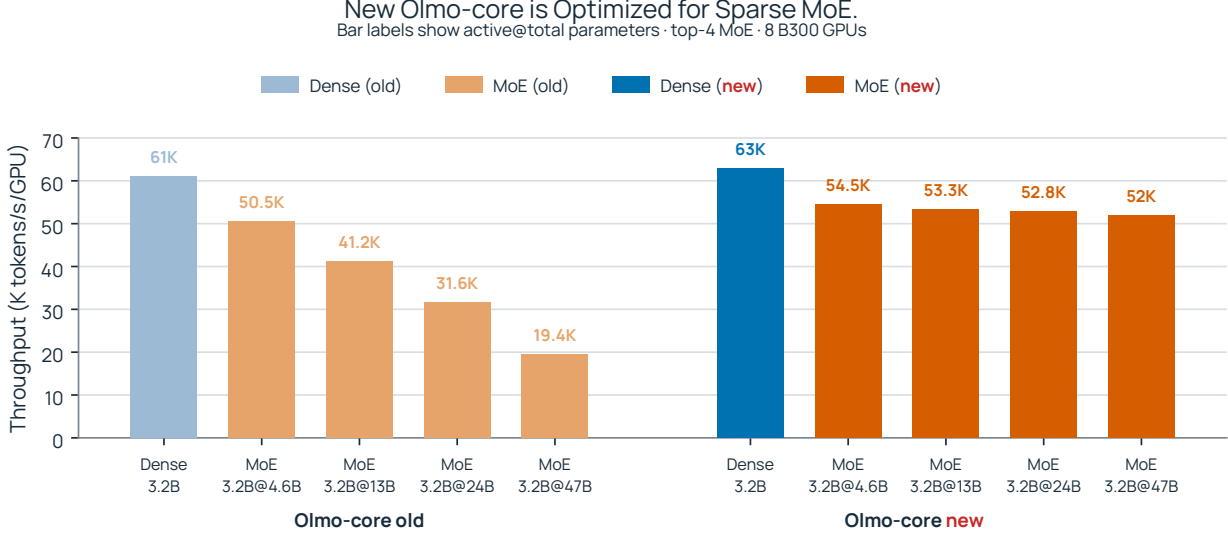


Figure 4 Throughput as total expert capacity grows at nearly fixed active FLOPs. These preliminary measurements use an eight-layer bfloat16 (BF16) model on one 8×B300 node without pipeline parallelism (PP; Section 6); MoE uses top-4 routing, and the new MoE path uses EP8. The old, dense-oriented FSDP path loses throughput as total expert capacity grows, whereas the new DDP+EP path keeps MoE throughput within a modest margin of its dense baseline. This is a composed-system result, not an isolated FSDP-versus-DDP or EP ablation.

1.3 Sparse Routing Breaks the Dense Training Assumptions

Training cost includes useful model work and systems overhead. To organize the costs of an optimizer step, we use the following reference accounting:

$$T_{\text{step}} = T_{\text{model}} + T_{\text{tax}}. \quad (5)$$

Table 2 lists the work included in each term. T_{model} is an ideal reference time for the prescribed forward and backward work at the hardware peaks for the precisions actually used, not the common BF16 normalization used for MFU. T_{tax} is the remaining elapsed time, including execution below those peaks and exposed overhead. The table identifies sources of that overhead, not independent profiler durations to add together: communication and computation can overlap. **Activation rematerialization**, or recompute, discards selected forward activations and recomputes them for the backward pass instead of keeping them in memory. It adds executed FLOPs without increasing useful model FLOPs, and a recomputed routed block can also repeat dispatch and combine (Section 13). In a well-tuned dense stack, large, regular model computations usually keep these costs in a workable balance. In MoE, useful computation follows the active parameters, while much of the tax follows total capacity or routed token assignments. Infrastructure built around dense assumptions can therefore let the tax dominate. The systems goal is to lower it until fewer useful FLOPs also mean less wall time.

1.3.1 Capacity Tax

Dense compute can amortize parameter-sized work. In a dense model, $P_{\text{active}} = P_{\text{total}}$: adding parameters increases the forward and backward arithmetic performed for every token as well as the parameters, gradients, and optimizer buffers that must be stored, reduced, or updated. The tax does not disappear, but it grows in step with useful model computation.

In MoE, the two no longer grow together. Sparse routing lets total expert capacity grow while each token continues to execute only its selected experts. We call the following dimensionless ratio, compared at fixed token count, execution schedule, and hardware, the **capacity-to-active gap**:

Component	What it includes	Dense ($P_{\text{active}} = P_{\text{total}}$)	MoE ($P_{\text{active}} \ll P_{\text{total}}$)
Useful Model FLOPs	- Model forward pass, excluding recomputation - Model backward pass - Covers embeddings, attention, dense/expert MLPs, normalization, residual additions, and the LM head	$\propto P_{\text{total}}$	$\propto P_{\text{active}}$, not P_{total}
	Gradients (§§4, 5.1)	- Gradient accumulation - Gradient reduction	$\propto P_{\text{total}}$; $\propto$ model FLOPs
Tax	Weights (§4)	- Optimizer-state updates - Parameter updates - Weight synchronization or redistribution	$\propto P_{\text{total}}$; $\propto$ model FLOPs
	Routing (§§5, 10)	- Router decisions and counting - Router auxiliary losses - Dispatch/combine communication - Dispatch/combine permutations	Absent
	Compute efficiency (§§8, 9)	- Small expert GEMMs - Uneven or fragmented grouped GEMMs - Smaller microbatches due to high memory pressure	High tax: follows EP topology
	Recompute (§13)	- Repeated forward operations to regenerate saved activations - Repeated EP communication when included in the recomputed region	Low tax: large, regular GEMMs
	Indirect runtime (§§5, 8–10)	- Device–host or stream synchronization - Dynamic route and general matrix multiplication (GEMM) shapes - Load imbalance - Extra launches and CPU overhead - Temporary buffers and memory traffic - Communication–compute contention	Higher tax: smaller, uneven expert batches reduce realized FLOP/s

Table 2 Useful model work and the systems tax. In dense training, many parameter-sized costs grow together with the useful model work. MoE decouples active computation from total capacity and adds routing-specific costs. “Tax” describes the role of the work, not its instruction type: optimizer and routing work may themselves include FLOPs.

$$\Gamma_{\text{capacity}} \equiv \frac{P_{\text{total}}}{P_{\text{active}}} = \frac{1}{\alpha_P}. \quad (6)$$

For dense models, $\Gamma_{\text{capacity}} = 1$. For MoE, it can grow as new routed experts increase P_{total} without proportionally increasing P_{active} . Related systems work observes the same decoupling between total model size and per-token work (Yan et al., 2026).

We call the concrete costs that continue to follow parameter capacity the **capacity tax**. Weight and gradient storage, optimizer state, and some synchronization can grow without a matching increase in useful per-token compute. The ratio Γ_{capacity} only measures how far stored parameters have outgrown the parameters each token uses; how much time that separation costs depends on the implementation. As the ratio increases, parameter-sized work grows relative to the useful computation available to amortize it.

Full-reshard FSDP matches dense models better than sparse MoE. Before model parallelism, ordinary DDP (Section 4) divides the training data while every rank stores the complete model. Adding DDP ranks therefore does not reduce per-GPU model memory. When a full dense-model replica no longer fits, dense Olmo uses FSDP to shard parameters, gradients, and optimizer state. In the **full-reshard** regime used by our comparison, FSDP all-gathers the full weights of each wrapped unit before the unit computes and

frees them after each use (Zhao et al., 2023).³ For a dense model, the parameters materialized for a wrapped unit also support useful computation for every token. The materialization is still a tax, but larger dense capacity brings a matching increase in useful model computation.

FSDP can make a large MoE fit as well, but its weight materialization no longer tracks useful work. In this configuration, every microbatch materializes the wrapped MoE unit’s parameter shards according to its stored expert capacity, while useful expert arithmetic follows the number of token–expert assignments. As $P_{\text{total}}/P_{\text{active}}$ grows, weight movement can therefore grow without a proportional increase in useful model work. Full resharding solves the immediate fit problem, but its per-microbatch weight materialization becomes a substantial part of the MoE capacity tax.

Olmo uses DDP plus model parallelism for MoE. The Olmo MoE design composes DDP with two forms of model parallelism: EP (Section 5) shards the routed experts, and pipeline parallelism (PP; Section 6) assigns different layers to different stages. EP and PP first make each rank’s model partition small enough to fit; DDP then synchronizes replicas of that local partition. A distributed optimizer shards the larger FP32 main weights and optimizer states, while the compute weights—the BF16 or MXFP8 (Section 11) representations read by forward and backward—remain static across the accumulation window and are refreshed once per optimizer step. Section 3 introduces the broader parallelism toolbox before the following sections develop these choices.

FSDP Moves Weights; DDP + EP Moves Activations

In the full-reshard regime tested here, FSDP gathers weight shards to materialize the wrapped weights around each microbatch. In Olmo’s DDP+EP design, each rank keeps its assigned expert weights in the same GPU buffers across the accumulation window, and EP dispatches only the selected token rows to those experts. EP also exchanges activation gradients during backward. Both approaches synchronize parameter gradients across replicas. Part II develops this design.

1.3.2 Runtime Tax

Sparse execution adds work around the expert computation. For a fixed batch shape, a dense feed-forward layer executes a predictable sequence of large, regular operations. A routed MoE layer must first decide which experts will process each token. It must then arrange and move token rows to those experts, execute the selected experts, and restore and combine their outputs. This work repeats in every routed layer and every microbatch. Sparse execution requires this work, but it is overhead around the useful expert computation.

The extra time appears in several forms. Routing requires decisions, counting, and bookkeeping. Dispatch and combine add memory movement, permutations, and, when experts are distributed, communication. Expert computation can become less efficient when the routed batches are small or uneven. Dynamic shapes and load imbalance can also introduce temporary buffers, extra kernel launches, CPU overhead, synchronization, and contention between communication and computation. The exact mixture depends on the routing decisions, the runtime implementation, and the hardware.

We refer to these routing, compute-efficiency, and supporting runtime costs collectively as the **MoE runtime tax**. Unlike the capacity tax, it is not explained by model size alone: two batches with similar nominal model FLOPs can take different amounts of time because they route tokens differently and exercise the runtime differently. Section 5 examines token movement, Section 8 addresses host submission and synchronization, Section 9 studies expert compute efficiency, and Section 10 examines routing imbalance.

³FSDP2 can instead retain unsharded parameters through backward and, with no reshard after intermediate backwards, across an accumulation window (PyTorch Contributors, 2026d). That policy gives up most of full-reshard FSDP’s peak unsharded-parameter memory advantage; its parameter footprint and communication cadence then approach DDP with sharded optimizer state. We treat it as a mechanism ablation, not a primary competing design. The primary comparison therefore uses full reshard; Appendix B.3 discusses the other reshard policies.

Capacity and Runtime Costs

The capacity tax follows total parameter capacity; the runtime tax follows sparse routing and execution. MoE’s FLOP advantage becomes a wall-time advantage only when the training system controls both.

1.3.3 End-to-End Optimization

EP lowers the expert capacity stored and synchronized by each rank, but introduces token traffic. Recomputation lowers activation memory by repeating model work (Section 13). Reduced precision can speed up matrix multiplications and reduce communication volume, but adds conversion work and can expose launch overhead. Its numerical recipe also matters: with round-ceiling scaling, MXFP8 closely follows BF16’s loss and gradient-norm trajectories over our measured checkpoint-branched continuation (Section 11.3.5, Figure 56). Overlapping communication with computation shortens the step only when the slowdown it causes in the concurrent kernels is smaller than the communication time it hides (Section 5.9). These interactions are a recurring property of MoE systems (Yan et al., 2026). The report-wide matrix in Appendix D, Figure 76, summarizes the first-order benefits and costs of the parallelism, communication, scheduling, precision, runtime, and checkpoint methods developed in the rest of this report. We place the full matrix in the appendix because many of its columns are introduced only in later sections.

We therefore evaluate component changes by their effect on complete-step time and throughput for a given model, batch, and topology. An isolated kernel or collective speedup is insufficient to establish that effect.

The next section presents how these mechanisms are integrated into one end-to-end system: the *Olmo-core DDP training stack*.

2 Olmo-core DDP Training Stack

Dense Olmo pretraining uses the FSDP-oriented path described by Team Olmo et al. (2025). The *Olmo-core DDP training stack* is a separate path centered on distributed data parallel (DDP) and built for MoE. It coordinates expert placement, token movement, gradient synchronization, optimizer updates, memory use, and low-precision execution across the training step.⁴

Sparse routing adds work throughout the training step. It adds data movement, irregular expert matrix multiplications, dynamic shapes, and CPU launch work. DDP provides the synchronization foundation; expert parallelism (EP) divides expert capacity, pipeline parallelism (PP) divides layers, and the distributed optimizer shards the FP32 main weights and optimizer states.

Figure 5 shows the scope of this design. Configuration and train-module orchestration sit above the MoE model, parallel runtimes, and supporting systems. A low-level software, kernel, communication, and transport layer provides their common execution substrate.

PyTorch provides the foundation, but its standard operators cannot remove every overhead introduced by sparse routing. Olmo-core therefore combines PyTorch with custom CUDA, C++, and Triton kernels (Tillet et al., 2019); NCCL and NVSHMEM communication (NVIDIA, 2026f,t); and CUTLASS grouped GEMM (NVIDIA, 2026m). These components run over the hardware links beneath them: NVLink within a node, InfiniBand between nodes, and PCIe between each GPU and its host. InfiniBand GPUDirect Async (IBGDA) lets GPUs initiate InfiniBand transfers directly. We design token layouts together with communication and expert computation, and low-precision formats are integrated with activation storage and transport rather than applied only to isolated GEMMs. A fast kernel is insufficient if it requires an extra permutation, a device-to-host synchronization, or a gap between launches elsewhere in the step.

The preliminary capacity sweep in Figure 4 motivates this design. One composed DDP+EP8 configuration retains most of its throughput as stored expert capacity grows, whereas the FSDP-oriented baseline slows.

⁴Olmo-core continues to support MoE through its earlier FSDP-oriented Transformer stack. We call that implementation the *legacy MoE path* only to distinguish it from the Olmo-core DDP stack presented here.

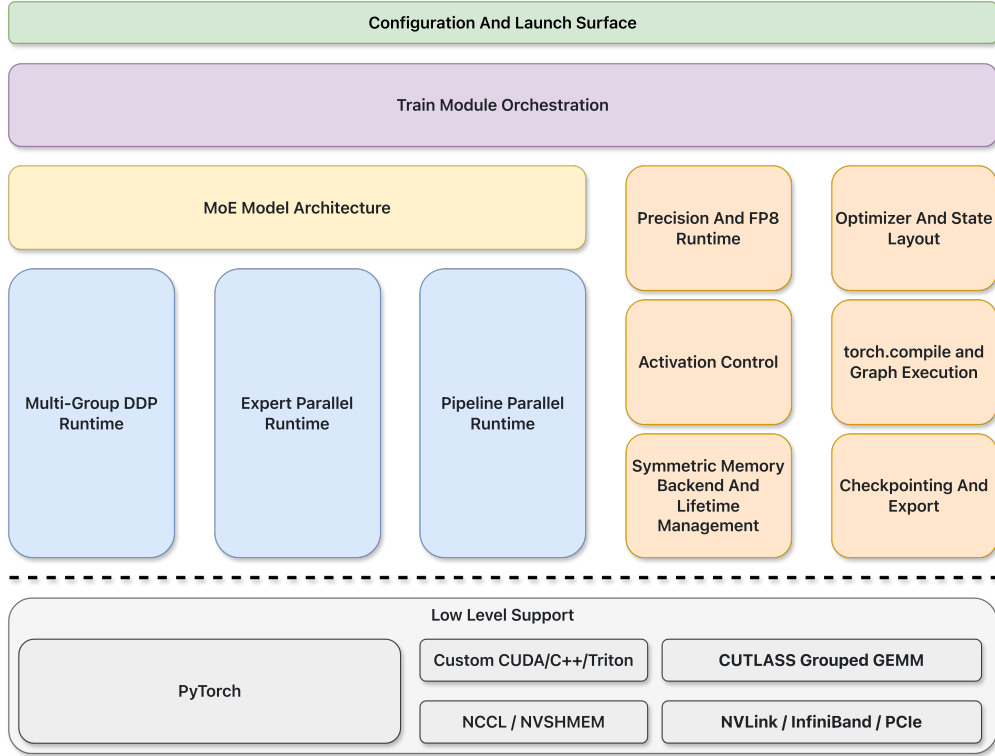


Figure 5 Subsystems of the Olmo-core DDP training stack. Colors mark the layers: configuration (green) and train-module orchestration (purple) sit above the MoE model (yellow), the parallel runtimes (blue), and supporting systems (orange). Low-level libraries, kernels, communication systems, and hardware interconnects (gray) form the substrate below. The layout groups system responsibilities rather than prescribing an execution order.

The result does not isolate the contribution of DDP, EP, or any particular kernel, and it measures throughput rather than time to quality.

The same design extends to trillion-parameter configurations. Because EP, PP, and the distributed optimizer each divide a different part of the model, the amount stored by each GPU stays bounded as the global model grows. We have run 296B-total-parameter BF16 and 1.200T-total-parameter MXFP8 configurations on 512 B300 GPUs, and an optional DeepEP v2 backend (Zhao et al., 2025b) extends the demonstrated envelope to a 2.380T-total-parameter configuration. The 2.380T figure comes from a short nine-step run and describes reachable capacity, not a sustained-throughput or time-to-quality result at that scale; Section 14 reports production throughput separately.

Measured throughput spans scales. Section 14 reports achieved useful-model TFLOP/s/GPU for five model scales, which we name Tiny, Small, Medium, Large, and Ultra in order of size, together with the active and total parameter counts, batch, EP/PP topology, precision, and recomputation policy needed to interpret each number. The selected headline values use random routing as a systems reference and are not a controlled scaling curve or a time-to-quality comparison.

Part II covers model placement, DDP synchronization, EP, PP, and their physical-network mapping. Part III covers synchronization-free execution, grouped GEMM, routing, MXFP8, checkpoint conversion, and recompute. The later findings examine training recipes and interactions observed in the complete stack.

Selected achieved throughput

B300 NVL8

useful-model TFLOP/s/GPU

1.59B @ 12.9B	4.29B @ 40.9B	7.38B @ 137B	15.1B @ 296B	58.4B @ 1.20T
12.3% active	10.5% active	5.38% active	5.12% active	4.86% active
903 TFLOP/s	841 TFLOP/s	843 TFLOP/s	768 TFLOP/s	858 TFLOP/s
40.1% MFU	37.4% MFU	37.5% MFU	34.1% MFU	38.1% MFU
64 Experts	64 Experts	128 Experts	128 Experts	128 Experts
BF16 EP1 PP1	BF16 EP8 PP1	BF16 EP8 PP4	BF16 EP8 PP4	MXFP8 EP8 PP8
Tiny	Small	Medium	Large	Ultra

The percentage under each size is the parameter activation ratio α_P (active over total parameters). MFU uses the B300 dense BF16 peak (2,250 TFLOP/s/GPU), also for MXFP8; it is not FP8-peak utilization (Equation 95). Full configurations and evidence limits: Section 14.

Part II

Parallelization

3 Parallelism Methods Divide Different Work and Storage

Section 2 introduced the complete Olmo-core DDP stack. Part II examines its parallel methods in terms of what ranks divide, what one rank keeps during computation, and when ranks communicate (Table 3).

A **rank-local model partition** is the part of the model assigned to one rank after model-parallel placement; without model parallelism, it is the full model. Model-parallel methods, namely expert parallelism (EP), pipeline parallelism (PP), and tensor parallelism (TP), decide which parameters the partition contains. Ranks that are assigned the same partition and process different training examples are **data-parallel (DP) ranks**. Data-parallel methods decide how those ranks store and synchronize the partition they share: distributed data parallel (DDP) keeps a complete copy on every DP rank, whereas fully sharded data parallel (FSDP) splits it across the DP ranks and gathers each piece when it is needed. Context parallelism (CP) divides the sequence rather than the model, while a distributed optimizer shards the FP32 main weights and optimizer states without changing forward or backward model placement.

For data-parallel and optimizer-sharding methods, we follow the standard definitions of DDP (Li et al., 2020), ZeRO-style distributed optimization (Rajbhandari et al., 2020), FSDP, and hybrid sharded data parallel (HSDP) (Zhao et al., 2023). For model and activation partitioning, we follow the standard definitions of EP (Lepikhin et al., 2021; Rajbhandari et al., 2022), PP (Huang et al., 2019; Narayanan et al., 2019), TP (Shoeybi et al., 2019), and CP (Jacobs et al., 2023; Liu et al., 2024).

DDP and FSDP determine when compute weights move. We start with this choice because it is the data-parallel foundation beneath EP and PP. FSDP remains a data-parallel method even though it shards stored parameters: its ranks process different data while executing the same model. EP and PP instead assign different experts or layers to different ranks.

In the FSDP configuration used by Section 4, each wrapped unit is gathered before its forward pass, freed afterward, gathered again before backward, and followed by gradient reduce-scatter (Zhao et al., 2023; PyTorch Contributors, 2026d). DDP instead keeps one *static* copy of the rank-local model partition at stable GPU locations across all microbatches that contribute to an optimizer step, then synchronizes the accumulated gradients. Here, *static* describes placement, not value: the optimizer still updates the weights after every successful step. This difference sets both the memory cost and the communication frequency developed in the next section. Appendix B.3 discusses other FSDP reshard policies.

EP and PP make the DDP partition fit. Olmo’s distributed optimizer shards FP32 main weights and optimizer states, EP divides routed experts, and PP divides layers. Optional CP divides long sequences when activation memory or attention work becomes limiting. Attention mixes token positions, so it is the layer CP must restructure. The routed experts process each position independently and can treat CP ranks as additional DP ranks. Olmo does not use TP. Every expert in our configurations fits on one GPU, and TP’s per-layer collectives would compete with EP for each node’s NVLink domain (Section 7).

The rest of Part II follows this dependency. Section 4 first compares DDP with FSDP. Section 5 then explains how EP divides experts, and Section 6 explains how PP divides layers. Section 7 finally maps their composition onto the physical network.

Appendix F covers the optional CP path in detail. Olmo uses the Ulysses form of CP, which changes attention from a local sequence slice with all heads to the full sequence for a subset of heads, then reverses that layout after attention (Jacobs et al., 2023). The MoE layers view the same ranks along two axes, developed in Section 5: ranks along the expert-sharding axis (EP-MP) hold different routed experts, while ranks along the expert-replica axis (EP-DP) hold copies of the same experts and synchronize their gradients. The appendix also explains how Olmo maps the dense DP×CP view and this MoE view onto the same ranks through MoE parallel folding (Liu et al., 2025a). Appendix C collects the symbols and terms used across these sections.

Method	What it divides	What one rank keeps during computation	When ranks communicate
Data-parallel and optimizer-sharding methods			
DDP	Input examples across DP ranks	One complete copy of the rank-local model partition	Accumulated gradients synchronize before each optimizer update
Distributed optimizer	FP32 main weights and optimizer states within a replica group	Compute weights and the local optimizer shard	Gradient intake, local shard update, and compute-weight reconstruction once per optimizer step
FSDP / HSDP	Persistent training state—parameters, gradients, and optimizer data—across a shard group; HSDP repeats shard groups	Full weights for the current wrapped unit; other units remain sharded	Gather weights before each forward and backward use; free them after each use and reduce-scatter gradients in backward
Model and activation partitioning			
EP	Routed experts	The assigned expert shard; dense and shared weights follow the other axes	Dispatch and combine in each routed layer and microbatch; synchronize expert copies once per optimizer step
PP	Transformer layers across physical and virtual stages	The layers assigned to the local stages	Hidden activations and their gradients cross stage boundaries for every microbatch
TP	Individual tensors and matrix operations	One tensor or operator shard	Activation or partial-result collectives inside each sharded layer
CP	Sequence positions	A local sequence slice; attention also needs keys and values from the other slices	Ring attention passes key/value blocks around the CP ranks during attention; Ulysses exchanges sequence and head slices with all-to-all before and after attention

Table 3 Parallel methods divide different work and communicate at different times. The rows are composable mechanisms, not mutually exclusive systems. The FSDP/HSDP row describes the configuration used in this report’s primary comparison. TP is included as a standard point of comparison; the Olmo stack described here does not use it. The Olmo MoE path uses the Ulysses form of CP (Appendix F).

4 Distributed Data Parallel

Sparse MoE changes the cost of parameter materialization. In a dense model, $P_{\text{active}} \simeq P_{\text{total}}$: nearly every parameter that is materialized participates in useful computation for every token. Sparse MoE breaks that coupling. Its expert capacity grows with P_{total} , while the expert arithmetic performed for one token follows P_{active} . On the FSDP path studied here, parameter materialization therefore continues to follow the rank-local parameter capacity even as useful expert work follows only the active experts, so the same gathering cost is spread over less useful work. Olmo-core changes the foundation to DDP so that the rank-local model partition, once it fits in memory, stays at a stable location across the accumulation window. A distributed optimizer, EP, and PP then reduce the persistent training-state memory—compute weights, gradient buffers, FP32 main weights, and optimizer states—that each rank must carry, so the partition fits without gathering parameters in every microbatch.

This motivation is specific to sparse MoE configurations with a large gap between total and active parameters and with a rank-local partition that fits after optimizer, expert, and pipeline sharding. It is not a general argument against FSDP. Throughout this section, *FSDP* refers to full-reshard FSDP2; Appendix B.3 discusses FSDP configurations that keep gathered parameters instead of freeing them. Dense Olmo continues to use an FSDP/HSDP-oriented stack (Team Olmo et al., 2025). The Olmo-core DDP stack can also train dense models and can be faster when its rank-local compute-weight partition fits. Within current Olmo-core, it is also the path for fine-grained integrations such as native MXFP8. We therefore treat DDP as a second training foundation, not as an MoE-only mechanism or a universal replacement for FSDP.

4.1 DDP Uses Static Compute-Weight Replicas

Start with replicated data parallelism and no model parallelism. Let D denote the DDP degree. Every rank holds the complete model (Figure 6), processes different training examples, and accumulates gradients for corresponding parameters. Before an optimizer update, a collective reduction produces the same synchronized gradient for each replicated parameter, so all replicas apply the same update and stay identical. This is the standard replicated-data-parallel contract implemented by PyTorch DDP (Li et al., 2020). As in Section 3, *static* refers to placement, not to persistent memory: the weights stay at stable GPU locations, and the optimizer still updates their values after every successful step.

FSDP uses a different parameter-materialization policy for data parallelism. Persistent parameter, gradient, and optimizer-state allocations are sharded across the FSDP group. Before a wrapped unit—for example, one Transformer block—runs its forward or backward computation, FSDP gathers that unit’s complete weights. After the computation consumes those weights, FSDP frees the gathered copy and keeps only the local shard; backward also reduce-scatters gradients into their persistent shards. FSDP thereby lowers persistent parameter, gradient, and optimizer memory at the price of gathering and materializing weights around each layer use. Both methods still process different input data. They differ in which complete weights remain materialized between uses. The original FSDP paper and the current FSDP2 documentation define this mechanism and its reshard policies (Zhao et al., 2023; PyTorch Contributors, 2026d).

Mixed-precision training separates the representation used by model computation from the higher-precision values used by the optimizer (Micikevicius et al., 2018). The following terms distinguish the three parameter-sized allocations used throughout this section.

Compute Weights, Main Weights, and Optimizer States

Compute weights are the representations consumed by forward and backward computation. Ordinary layers use BF16 compute weights; selected MXFP8 linears use quantized data and scales, including orientation-specific weight caches.

Main weights are the FP32 parameter values updated by the optimizer. For storage accounting, we group them with the optimizer states because the distributed optimizer stores and shards them together; they remain parameter values, not optimizer states. The updated main weights are then used to refresh the BF16 or MXFP8 compute weights.

Optimizer states are the per-parameter buffers that an optimizer keeps between steps. In Olmo, parameters updated by AdamW keep two moment estimates (Kingma and Ba, 2015; Loshchilov and Hutter, 2019), and matrices updated by Muon keep one momentum buffer (Jordan et al., 2024; Liu et al., 2025b); all of these states are stored in FP32.

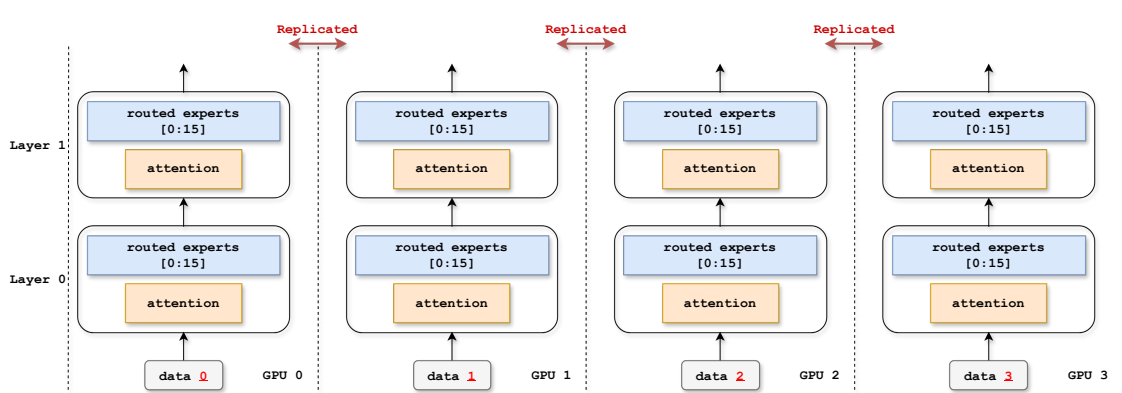


Figure 6 A four-GPU DDP example with no model-parallel sharding. With $DP = 4$, every GPU holds a static replica of the same attention layers and complete routed-expert pool, experts 0–15, while processing different input data. DDP synchronizes the gradients of these replicated weights; it does not itself shard the model shown here.

These dtypes are training-recipe choices, not requirements imposed by DDP or optimizer sharding. DeepSeek-V3 and Megatron-Core report storing both AdamW moments in BF16 while retaining FP32 main weights and accumulated gradients (DeepSeek-AI et al., 2024; Yan et al., 2026). Olmo keeps both AdamW moments in FP32 in the configurations described here; we have not evaluated lower-precision moment storage in this stack.

Let B be the tokens processed by one rank in an optimizer step, m the number of microbatches, K the number of active experts, d the model width, and D the DDP degree. Table 4 gives approximate resource costs for the work introduced in Section 1.3. The table omits constant factors and hardware efficiency.

No model parallelism: every DP/DDP rank holds the whole model			
Training work	When it happens	Approximate cost	What changes for MoE
Forward and backward model compute	Every microbatch	$\propto BP_{\text{active}}$ for parameter-linear terms	This is the useful work. It follows active, not total, parameters.
Gradient storage and accumulation	Kept through the accumulation window; initialize once; add after each backward	Storage and zeroing $\propto P_{\text{total}}$; additions recur for each microbatch	Buffer capacity follows total parameters. A rank’s experts share one stacked gradient tensor, so each accumulation can touch the whole tensor even when only some experts received tokens.
Gradient synchronization	Final microbatch, or every microbatch	Payload $\propto P_{\text{total}}$; the exact factor depends on D and the collective algorithm	Skipping it on the earlier microbatches (PyTorch’s <code>no_sync()</code>) leaves one synchronization per optimizer step, but the payload still covers the full gradient replica, including experts that received no tokens.
Optimizer update	Once per optimizer step	Arithmetic and memory traffic $\propto P_{\text{total}}$	An inactive expert still has a weight and optimizer states; in this unsharded baseline every DP rank carries them.
Updated-parameter distribution	After the optimizer step	Local only in unsharded DDP	Every rank updates its complete replica, so there is no parameter collective. Parameter movement appears only after choosing a sharded optimizer.
Routing and expert work setup	Every MoE layer and microbatch	Activation movement $\propto BKd$ per routed layer, plus route metadata and launches	Top- K , counting, permutation, and combination already exist with all experts local; the grouped expert GEMMs are useful model work.

Table 4 Cost ledger before model parallelism. Every DP/DDP rank holds a complete model replica and an unsharded optimizer. These estimates show which resources grow; they do not add up to elapsed time. Model-sharding choices change the per-rank parameter costs and when they are paid.

These proportionalities identify pressure points; they are not additive terms in an elapsed-time model. Collective traffic also depends on the algorithm, topology, and overlap with other work. For example, ring all-reduce moves approximately $2(D-1)/D$ payload copies per rank, while aggregate network traffic additionally grows with the number of ranks (Patarasuk and Yuan, 2009).

The capacity-to-active gap is especially clear for the expert MLP. A bias-free SwiGLU expert pool with model width d , expert hidden width h_e , and N routed experts stores approximately $3Ndh_e$ parameters, whereas one token evaluates approximately $3Kdh_e$ of them. Parameter-sized work can therefore grow with N while useful expert arithmetic grows with K . The next subsection compares how often DDP and FSDP perform that parameter-sized work.

4.2 FSDP Gathers per Microbatch; DDP Synchronizes per Global Step

An optimizer step is the complete accumulation window that produces one model update. Suppose it contains m microbatches of b tokens per rank, so the rank-local accumulated batch is $B = mb$. At fixed microbatch shape, useful model work grows the same way under either data-parallel choice:

$$W_{\text{useful}}(m) \propto mbP_{\text{active}}. \quad (7)$$

The parameter-sized communication differs between the two alternatives (Figure 7):

- **With DDP**, gradient synchronization and, when using a distributed optimizer, compute-weight reconstruction occur once per optimizer step. Their payload scales with the rank-local parameter count, $W_{\text{DDP boundary}} \propto P_{\text{local}}$.
- **With FSDP**, weight gathering and freeing recur as each wrapped unit is used in every microbatch. Across the accumulation window, this movement scales as $W_{\text{FSDP materialization}} \propto mP_{\text{local}}$.

The DDP and FSDP terms describe alternative designs; they are not paid together. Increasing m spreads DDP’s once-per-step synchronization over more useful work, whereas it repeats FSDP’s weight movement. The optimizer update itself remains once per optimizer step in both designs.

On the Olmo-core DDP path, non-final microbatches run under `no_sync()` (Li et al., 2020). Gradients accumulate in stable buffers, and the complete window ends with one ordered sweep of bucketed all-reduces. When the distributed optimizer is enabled, it then updates each rank’s FP32 main-weight and optimizer-state shards and reconstructs the compute weights once. Replica synchronization therefore occurs at the global-step boundary, even with optimizer sharding.

With FSDP, each wrapped unit must instead be materialized for its forward and backward computation and freed after each use. Gradient accumulation can delay the optimizer step, but it does not eliminate this repeated weight movement. Retaining every gathered unit across the accumulation window instead trades that movement for higher memory, as discussed in Appendix B.3 (PyTorch Contributors, 2026d).

DDP moves gradient reduction and optimizer reconstruction to the global-step boundary, but it does not make all communication independent of m . Once EP is enabled, dispatch and combine move routed token rows, and their backward adjoints, in every routed layer and microbatch. Accumulating more microbatches spreads the once-per-step gradient synchronization and optimizer update over more useful work, but it does not reduce each microbatch’s EP traffic or enlarge its grouped-GEMM shapes.

The preliminary single-node accumulation sweep in Figure 8a shows the expected global-batch signature without mixing in EP. It fixes the model at 48 routed experts, approximately 3.2B active and 19B total parameters, fixes the rank-microbatch shape, and changes only the number of accumulated microbatches. Both paths run with EP disabled.

Figure 8 places this accumulation result beside the capacity sweep used in the next subsection. The panels test different questions: the left varies how much useful work shares one synchronization boundary, while the right varies how much inactive expert capacity the system must store and manage.

These trends are consistent with the cost model: DDP spreads its once-per-step work over more useful computation as the batch grows, while FSDP repeats its weight gathering in every microbatch. Each point is a single run without a matched communication profile, so the figure shows the trend but not its exact cause, and it measures throughput, not training quality or time to a target loss.

4.3 DDP Alone Hits a Memory Wall

Static replicas require a local partition that fits in memory. DDP removes repeated weight materialization only by keeping its compute weights and selected training buffers present throughout the accumulation window. Peak memory therefore combines persistent training state with execution working memory, summarized in Table 5.

FSDP has a direct advantage in persistent training-state memory. With enough shard ranks, it can make each rank’s long-lived parameter, gradient, and optimizer-state contribution small, although the currently materialized unit, activations, and temporary buffers still contribute to peak memory. DDP keeps the compute-weight

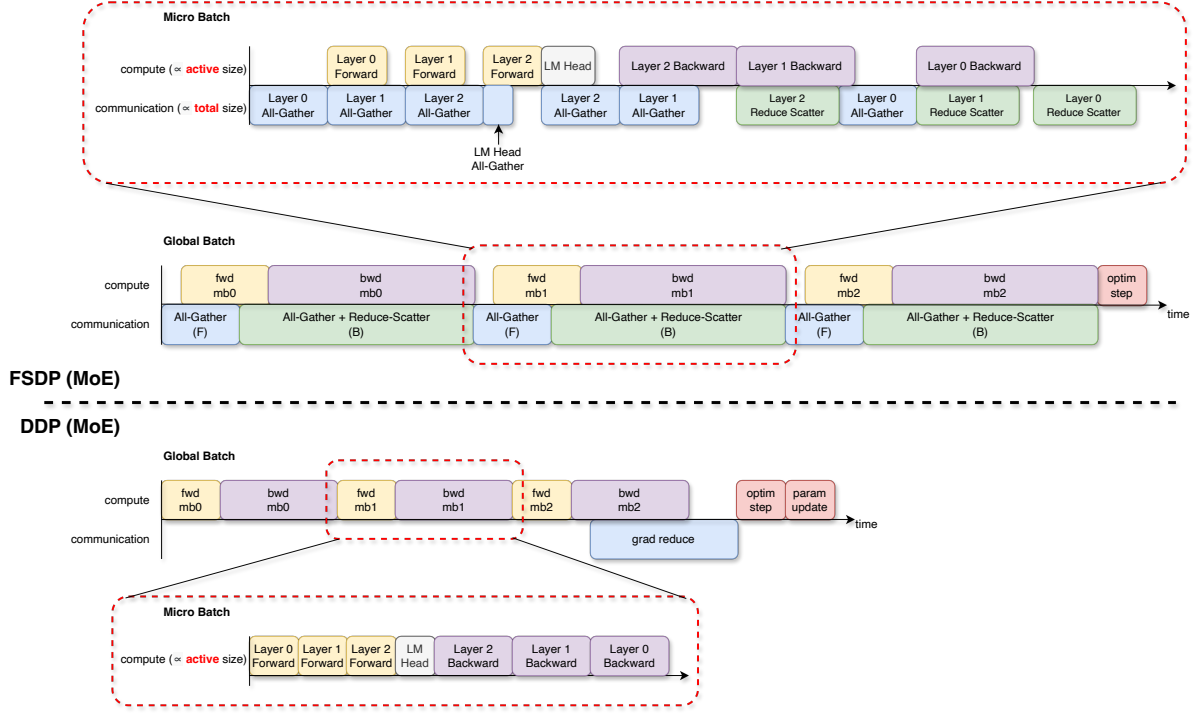


Figure 7 Weight materialization and gradient synchronization run on different clocks. Under the illustrated FSDP schedule, unsharded weights are materialized around layer use in each microbatch. DDP instead uses static replicas of its local weights throughout the accumulation window and synchronizes accumulated gradients at the optimizer-step boundary. When EP is enabled, token dispatch and combine still recur in every routed layer and microbatch. The phase widths were manually reconstructed from one representative profile and preserve its approximate timing proportions; the diagram is not an aggregate benchmark.


Memory class	What it includes	Why it matters
Persistent training state	Compute weights; gradient-accumulation buffers; FP32 main weights; optimizer states and other long-lived optimizer buffers	Must remain available across microbatches or update boundaries. DDP, the distributed optimizer, EP, and PP determine which portions are replicated or sharded.
Execution working memory	Activations; materialization, routing, and communication buffers; kernel workspaces; allocator fragmentation; execution caches	Its contents and peak demand depend on microbatch shape, recomputation, routing, schedule, kernels, and runtime behavior. A preallocated fixed-address buffer can still belong to this class.

Table 5 Peak memory combines persistent training state and execution working memory. This distinction is based on role, not physical allocation lifetime: a fixed-capacity routing buffer can be preallocated yet remain execution working memory. It prevents parameter-byte accounting from being mistaken for a complete peak-memory prediction.


representation of its rank-local partition complete. That partition, its gradient buffers, and the execution working set must all fit at once.

Figure 9 isolates the parameter-sized persistent training-state allocations directly changed by the distributed optimizer and EP under one concrete policy.

The capacity sweep in Figure 8b makes the wall visible while holding useful expert work approximately fixed. Top- K stays at 4 and the active model size near 3.2B parameters as the routed-expert pool grows from 8 to

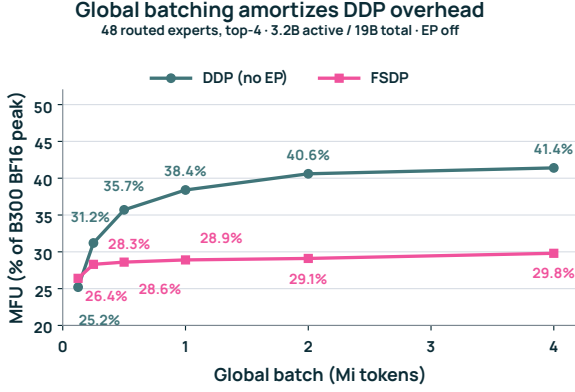

(a) Accumulation amortizes DDP’s per-step synchronization.

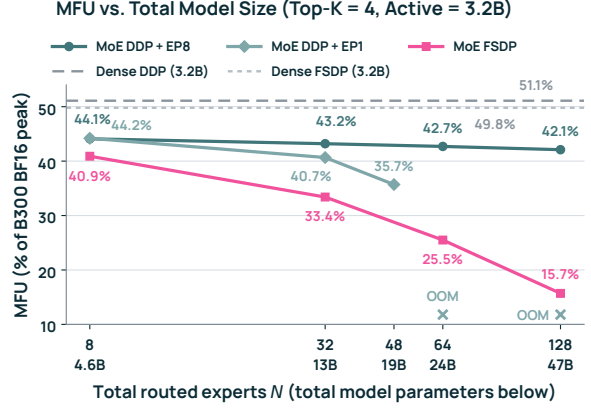

(b) EP delays DDP’s expert-capacity memory wall.

Figure 8 Global-batch and expert-capacity sweeps expose different limits. Preliminary single-node measurements use eight B300 GPUs, an eight-layer BF16 MoE model, top-4 random routing, no PP, and approximately 3.2B active parameters. **Left:** with EP disabled and 48 routed experts (19B total parameters), DDP useful-model FLOPs utilization (MFU) rises from 25.2% to 41.4% between 128-Ki and 4-Mi-token global batches (1 Ki = 2^{10} and 1 Mi = 2^{20} tokens), while FSDP rises from 26.4% to 29.8%. **Right:** total capacity grows from 4.6B to 47B parameters; no-EP DDP runs out of memory at 64 and 128 experts, no-EP FSDP continues to fit but loses useful-model MFU, and DDP+EP8 remains nearly flat. Each point is one run, so the curves show preliminary scaling behavior rather than run-to-run variance. They do not decompose peak memory or attribute the trend to a specific communication phase.

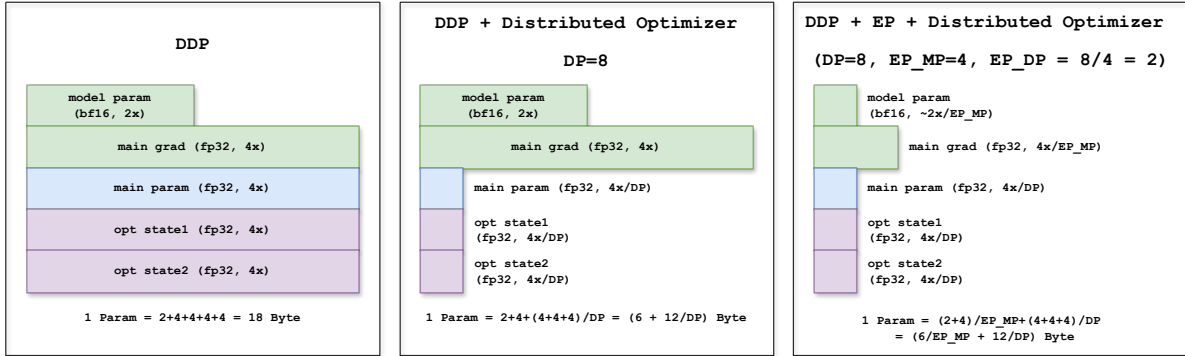


Figure 9 The distributed optimizer and EP reduce different parts of DDP’s persistent parameter-sized training state. Under the illustrated BF16-execution, FP32-gradient, and two-moment FP32 optimizer policy, naive DDP uses 18 bytes per parameter. Sharding the FP32 main weights and optimizer states evenly over D replica ranks reduces this to $6 + 12/D$ bytes while compute weights and gradient buffers remain replicated. Sharding routed-expert compute weights and gradients over the expert-parallel model-sharding degree M_E (EP-MP; defined in Section 5) further reduces their per-rank memory contribution to $6/M_E + 12/D$ bytes when $D = M_E D_E$. Dense and shared parameters follow their separate replica groups. This accounting excludes execution working memory, including activations, routing and communication buffers, kernel workspaces, execution caches, and allocator fragmentation, as well as uneven shards and small auxiliary tensors that are not sharded.

128 experts. DDP without EP fits at 8, 32, and 48 experts, then runs out of memory at 64 and 128. FSDP without EP continues to fit, but its measured MFU falls as total capacity grows. DDP+EP8, which also shards the routed-expert pool across eight ranks, remains near 42–44% MFU over its measured points.

In the right panel, DDP+EP8 stores one eighth of the routed-expert pool per EP-MP shard; the dashed dense references were measured separately. Its measured MFU is nearly flat, but the per-rank expert shard still grows as $N/8$. This residual growth matters more as modern MoE designs increase N while keeping K small

(Table 1): EP changes the per-rank growth from N to N/M_E , but it does not make memory independent of total expert capacity. Olmo therefore reduces the rank-local partition with a distributed optimizer, EP, and PP.

4.3.1 Distributed Optimizer Shards FP32 Main Weights and Optimizer States

The first of these three mechanisms, the distributed optimizer, keeps model execution unchanged while shrinking the memory for FP32 main weights and optimizer states. Under the illustrated AdamW-like policy, one parameter contributes a 2-byte BF16 compute weight, a 4-byte FP32 gradient-accumulation slot, a 4-byte FP32 main weight, and two 4-byte FP32 moments. Naive DDP therefore carries 18 bytes per parameter before execution working memory. The distributed optimizer leaves the compute weight and gradient buffer replicated within that parameter’s replica group, but shards eligible FP32 main weights and optimizer states over the group. The idealized $6 + 12/D$ expression in Figure 9 assumes even sharding. This optimizer-state partition follows the design family introduced by ZeRO (Rajbhandari et al., 2020).

Figure 10 compares the two useful balanced layouts with a naive baseline. *Concatenate-then-shard* flattens all eligible optimizer-state tensors into one sequence and partitions that sequence across ranks. It balances the aggregate optimizer state and does not require every tensor to be individually divisible by the sharding degree. Its cost is bookkeeping: shard boundaries may cut through tensors, so optimization, weight reconstruction, and checkpointing must all preserve a global map from each tensor to its flat-buffer views and offsets.⁵ The figure’s *same-param-count* baseline assigns the same number of complete parameter tensors to every rank. It does not equalize the number of scalar elements. Because tensor sizes vary widely, equal tensor counts can produce severely unequal byte counts and are the least useful of the three layouts.

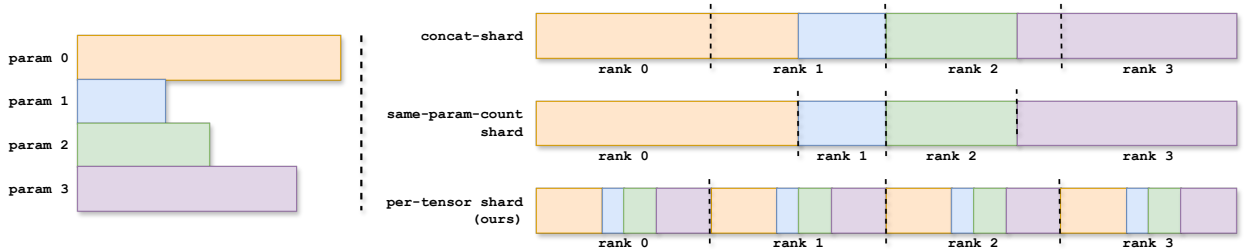


Figure 10 Optimizer-state layout choices. Colors identify eligible FP32 optimizer-state tensors associated with different model parameters; they do not represent the replicated BF16 compute weights. Dashed lines mark the ranges assigned to each rank in an optimizer replica group of size $D = 4$. Concatenate-then-shard balances the flattened optimizer state globally but requires explicit view and offset metadata. The same-param-count baseline preserves whole tensors but can severely imbalance bytes. Olmo instead divides each eligible main-weight and optimizer-state tensor independently into D equal contiguous shards.

Olmo uses the per-tensor layout in the bottom row. Each eligible tensor is flattened and divided independently across its optimizer replica group; its FP32 main weight and optimizer states use the same rank-local slice. The mapping is local to one tensor, so update, reconstruction, and checkpoint views remain direct and easy to inspect. The trade-off is that the current policy shards a tensor only when it is sufficiently large and its element count is divisible by the replica-group size. Small or non-divisible optimizer-state tensors remain replicated, as do scalar step counters. This fallback does not prevent training, but it reduces the memory saved by the distributed optimizer.

In practice, this restriction is mild for the regular, mostly power-of-two replica groups in our production configurations, including groups of 128 ranks: nearly all large model tensors are divisible by these group sizes. Irregular sharding degrees such as 7 or 13 would cause more tensors to remain replicated, but we have not encountered that case in our production runs. Muon changes the number of optimizer history tensors, not this placement rule.

⁵Megatron-LM’s standard `DistributedOptimizer` is a bucket-level instance of this layout. It assigns equal contiguous bucket ranges to data-parallel ranks; because a range may cut through a parameter, the implementation maps bucket slices back to parameter slices (NVIDIA, 2026d).

At the end of the accumulation window, DDP first produces reduced FP32 gradients. Each rank narrows the relevant gradient into the shard corresponding to its FP32 main-weight shard, updates that shard and its optimizer states locally, and then participates in coalesced all-gathers that reconstruct the updated compute weights. Thus gradient reduction, sharded update, and reconstruction happen once per optimizer step. The mechanism recovers much of the optimizer-state memory that motivated FSDP without evicting or rematerializing compute weights between microbatches, but it does not remove the replicated weight and gradient floor.

4.3.2 EP Shards Expert Weights and Gradients

The second mechanism reduces the routed-expert memory that the distributed optimizer leaves replicated. With EP-MP degree M_E , each rank stores roughly N/M_E routed experts and their gradient buffers rather than all N experts. Ranks holding copies of the same expert shard form an EP-DP group of size D_E : they reduce that shard’s gradients together, and the distributed optimizer shards its FP32 main weights and optimizer states over those D_E replicas. Because the original data-parallel group has size $D = M_E D_E$, expert optimizer state is still divided across the same total degree D after the two stages of sharding. EP’s additional memory saving is therefore in compute weights and gradient buffers; it is not another factor applied to optimizer state that was already sharded over D . Section 5 introduces the EP-MP and EP-DP topology and the dispatch/combine traffic paid for this saving.

4.3.3 PP Shards Layers and Their Persistent Training State

EP divides the expert pool inside a layer, but every rank may still hold too many layers, dense weights, shared experts, and activations. PP assigns different layer ranges and their weights, gradient buffers, and optimizer shards to different stages, reducing this persistent training-state memory in each rank-local partition. It introduces a different tax: activation transfers, pipeline bubbles, and multiple in-flight microbatches. Section 6 develops those schedules and memory trade-offs. Together, the distributed optimizer, EP, and PP make DDP practical at model sizes where ordinary replicated DDP is not.

4.4 Olmo-Owned DDP

The Olmo-core DDP training stack includes both replica synchronization and the update path around it. PyTorch’s standard `DistributedDataParallel` wrapper is designed around one process group and ordinary `Parameter.grad` handling (Li et al., 2020; PyTorch Contributors, 2026a). Olmo combines separate execution and update precision, parameter-specific replica groups after EP, sharded optimizer states, derived MXFP8 representations, and explicit completion after gradient accumulation or a pipeline schedule. Each piece can be assembled from PyTorch mechanisms, but operating them as one coordinated update path requires integration deep enough that Olmo implements and controls the DDP path directly rather than layering it around the standard wrapper.

4.4.1 Hybrid Precision Control

Execution precision and update precision serve different goals. BF16 and MXFP8 reduce model execution and storage cost. Gradient accumulation sums contributions across microbatches, gradient reduction combines ranks, and the optimizer integrates updates over many steps. Mixed-precision training keeps an FP32 master copy of the weights for updates and performs large sums in FP32 (Micikevicius et al., 2018); we apply the same principle to gradient accumulation and reduction. In the Olmo-core DDP configuration described here, model execution uses BF16 or selected MXFP8 paths, while normal parameter gradients accumulate in dedicated FP32 bucket views, reduce in FP32, and feed FP32 main weights and optimizer states.

This separation is more specific than generic mixed-precision execution. For an ordinary BF16 parameter, autograd’s leaf `AccumulateGrad` node first produces a temporary BF16 `param.grad`. A post-accumulate hook immediately adds that gradient into the parameter’s FP32 accumulation buffer and clears `param.grad`. Each FP32 accumulation buffer is a view into a flat bucket built before training, and gradient reduction operates directly on that bucket.⁶ The policy described here uses FP32 accumulation and FP32 reduction.

⁶The wrapper constructs buckets by replica group, gradient-storage dtype, communication dtype, and size limit. It binds each parameter’s `_main_grad_fp32` to the corresponding slice of the bucket’s flat FP32 storage. Under the FP32-accumulation

After the optimizer updates an FP32 main weight, the BF16 or MXFP8 compute-weight representation is refreshed. MXFP8 weight stores use the optimizer-integrated path described below.

4.4.2 EP Requires Multiple DDP Groups

EP makes a single process group insufficient for one model part. Dense parameters are replicated across the dense data-parallel group. Ranks along EP-MP hold different expert shards and must not average those shards together; only EP-DP ranks holding copies of the same expert shard reduce its gradient. A single standard PyTorch DDP wrapper selects one process group for all of its parameters, whereas the MoE model part contains both kinds of parameter.

For parameters handled by the bucketed DDP path, Olmo chooses a replica group per parameter and forms buckets only among parameters with compatible groups and storage and communication dtypes. Non-final microbatches accumulate locally. Explicit finalization launches the remaining bucket reductions in a stable order and preserves gradients from experts that appeared earlier in the window but not in its final microbatch. Section 5 derives the topology that these groups implement.⁷

4.4.3 Native MXFP8 Integration

An MXFP8 compute-weight cache is not independently updated. The FP32 main weight is the source used to rebuild the derived, orientation-specific MXFP8 caches for forward and dgrad. After an update, the optimizer gathers any sharded FP32 main weight, reconstructs the full weight, and refreshes the caches coherently. The current path casts through a BF16 compute-weight representation before quantization, so we describe the caches as *derived from* the FP32 main weight rather than as a direct FP32-to-MXFP8 conversion. Section 11 covers formats, scales, and kernels, together with the cache formats and refresh points.

4.4.4 Collectives and Weight Reconstruction Stay Outside the Compiled Update

Olmo keeps collective launches and compute-weight reconstruction outside the compiled optimizer computation. This separates local shard updates from the communication and refresh phases that surround them, making their order explicit and keeping each phase visible in the step timeline. The same update path coordinates gradient clipping with the optimizer step and performs per-group initialization checks.

4.5 DDP and FSDP Optimize Different Bottlenecks

FSDP minimizes long-lived unsharded parameter storage by materializing weights around use. Olmo-core DDP keeps its rank-local compute-weight partition, which must fit in memory, materialized at stable locations across accumulation and moves gradient synchronization and optimizer reconstruction to the global-step boundary. The distributed optimizer lowers FP32 main-weight and optimizer-state memory, EP divides the routed-expert pool, and PP divides layers. Olmo’s implementation integrates the precision, replica-group, and derived-representation refresh rules needed by that composition.

Dense Olmo continues to use FSDP/HSDP. When useful compute grows with materialized parameters or peak parameter, gradient, and optimizer memory is the primary constraint, FSDP or HSDP remains an effective foundation. The current single-node sweeps establish two local scaling patterns in the eight-layer model: accumulation amortizes more of DDP’s step-boundary work, and increasing expert capacity raises pressure on an unsharded local partition. They do not establish a universal sparsity crossover, optimization quality, or time to a target loss.

The next section develops EP as the model-parallel mechanism that makes the routed-expert partition fit. It explains which ranks hold different expert shards, which ranks hold replicas of the same shard, and why saving weight and gradient memory introduces dispatch and combine on the microbatch clock.

and FP32-reduction policy described here, the all-reduce consumes that flat storage directly. This follows the standard DDP bucket pattern; Olmo extends it to multiple replica groups and explicit storage and communication dtypes.

⁷The current implementation is named `MultiGroupDistributedDataParallel`.

5 Expert Parallelism

EP reduces routed-expert storage per rank. DDP synchronizes model replicas, but it does not reduce the size of each replica. Without model parallelism, every DDP rank stores all N routed experts even though each token uses only K . Expert parallelism (EP) distributes the routed-expert pool across the existing DP ranks. Each rank stores its assigned expert shard, and selected token rows move to the ranks that store their experts. This reduces per-rank expert weights and gradient buffers, but adds dispatch and combine communication to every routed layer.

Olmo-core introduces rowwise EP. Conventional all-to-all EP moves tokens in large contiguous blocks, but constructing those blocks requires extra data reordering and can expose dynamic route sizes to the CPU. Rowwise EP keeps routing on the GPU and moves each accepted row directly to its destination, eliminating block packing and the associated host synchronization from Olmo-core’s EP path. NVSHMEM symmetric memory and GPU-initiated communication make this direct placement possible. Section 7 connects it to the underlying network.

5.1 EP Shards Models That Do Not Fit

Persistent training-state memory grows with total parameters.⁸ Top- K routing limits how many experts compute for one token, but it does not reduce how many expert weights a rank must store. Without model parallelism, the rank-local model partition is the whole model, so ordinary DDP places all N routed experts on every one of its D ranks. Increasing N can therefore increase total parameter capacity without increasing active expert work, yet still grow the compute weights and gradient buffers until one replica no longer fits. EP addresses this memory limit by partitioning the routed-expert pool, as in established large-scale MoE systems (Lepikhin et al., 2021; Rajbhandari et al., 2022).

EP uses the existing DP ranks. EP shards expert weights, but it does not require a separate set of ranks in addition to the data-parallel ranks. In the base topology, the same D ranks that form the dense data-parallel group are organized into an EP_MP rank axis of size M_E and an EP_DP rank axis of size D_E . Let $\mathcal{A}_{\text{EP_MP}}$ and $\mathcal{A}_{\text{EP_DP}}$ denote the coordinate sets of these axes. The DP group is their Cartesian product:

$$\mathcal{G}_{\text{DP}} = \mathcal{A}_{\text{EP_MP}} \times \mathcal{A}_{\text{EP_DP}}, \quad D = M_E D_E. \quad (8)$$

Each pair of coordinates identifies one rank in the DP group. Dense parameters remain replicated across all D ranks. Routed-expert parameters are sharded across EP_MP and replicated across EP_DP. Equation 8 covers the case without CP. Appendix F derives the folded case, where a CP degree C gives $DC = M_E D_E$ within each pipeline stage.

The four-GPU example in Figure 11 shows this rank organization. Begin with $D = 4$ ranks and $N = 16$ routed experts. Set $M_E = 2$ and $D_E = 2$. Each two-rank EP-MP group collectively holds one complete routed-expert set: one rank holds experts 0–7, and the other holds experts 8–15. There are two such EP-MP groups processing different data, so each expert shard has two copies. Attention, the router, and other non-sharded parameters remain replicated across the four dense-DP ranks.

A route connects a token-source rank to an expert rank. The token-source rank holds the token before dispatch and receives its combined contribution. The expert rank stores and executes the selected expert. These are per-route roles, not additional parallel axes.

⁸Relative to a dense model with the same total parameter count, activating only K of N experts reduces per-token computation but not the bytes required to store the complete parameter set and its persistent training state.

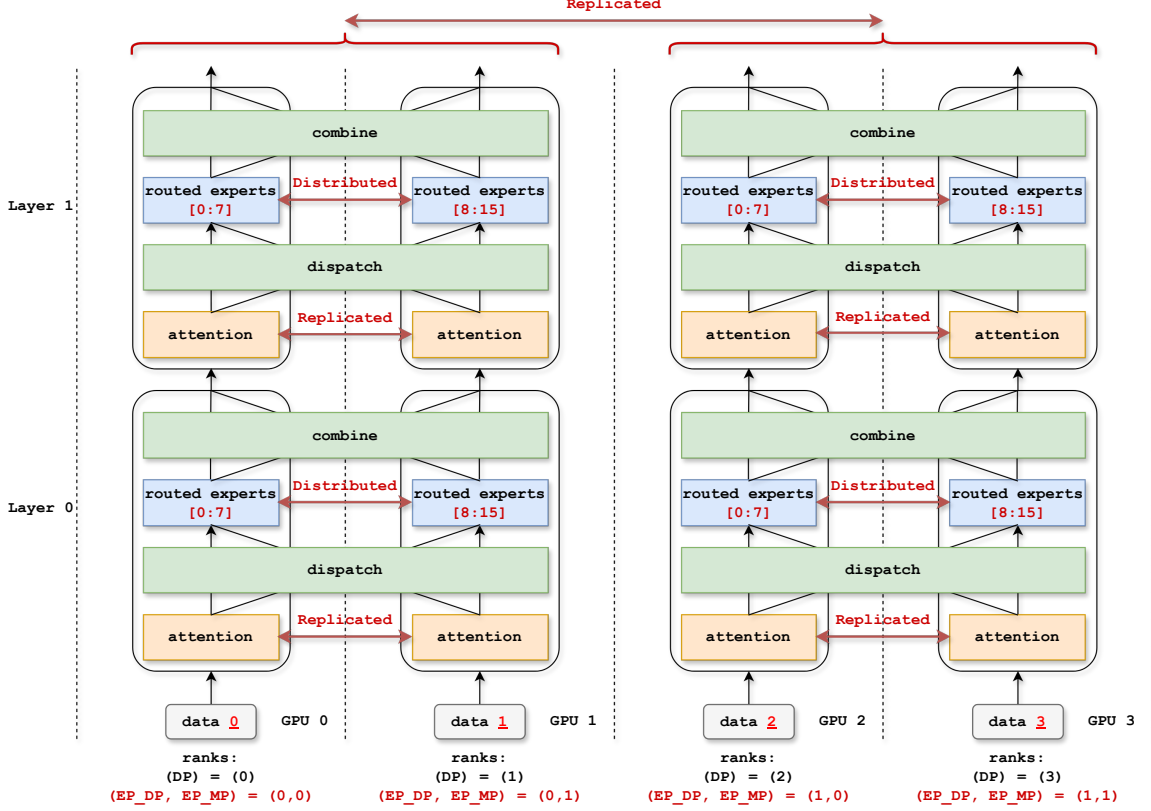


Figure 11 A four-GPU example with $DP = 4$, $EP_MP = 2$, and 16 total experts. Starting from the fully replicated layout in Figure 6, the same four DP ranks form EP-MP groups of size 2 and EP-DP groups of size 2. Each EP-MP group keeps attention replicated and shards experts 0–7 and 8–15 across its two ranks. Dispatch moves selected token rows to the appropriate expert rank, and combine returns their contributions. Ranks holding corresponding shards in the two EP-MP groups are EP-DP replicas and reduce gradients together.

EP Group Definitions

Expert-sharding group (EP_MP). Ranks in this group hold different expert shards and exchange routed token rows during dispatch and combine. Because their expert parameters differ, they do not reduce expert gradients together.

Expert-replica group (EP_DP). Ranks in this group hold replicas of the same expert shard and reduce that shard’s gradients together.

EP reduces expert memory and gradient traffic. Figure 9 previewed this decomposition under the report’s BF16-execution and FP32-optimizer policy. Abstracting from that specific precision policy, let P_E denote the routed-expert parameter count in the complete model. With an even expert assignment, each rank holds approximately

$$\text{expert weights per rank} \approx \frac{P_E}{M_E}, \quad \text{expert-gradient elements per rank} \approx \frac{P_E}{M_E}. \quad (9)$$

A rank synchronizes only its local expert shard over D_E replicas, rather than reducing the full expert pool over all D ranks. For a fixed EP-DP group size and reduction algorithm, the communicated expert-gradient volume therefore falls with P_E/M_E ; the exact network bytes also depend on D_E and the collective algorithm. Dense, router, shared-expert, and other non-sharded parameters do not receive this EP-MP reduction; they

continue to follow the dense DDP group. At fixed expert width, local expert weights and gradient buffers still grow as N/M_E . Keeping these per-rank tensors bounded as N grows therefore requires increasing M_E .

EP can reduce end-to-end step time when parameter-sized work dominates. Dispatch and combine add work to every routed layer and microbatch, whereas gradient synchronization and parameter update occur once per optimizer step. When the gradient-accumulation count is small and the routed-expert state is large, reducing the rank-local expert shard from P_E to approximately P_E/M_E can reduce the exposed expert-gradient and update phase enough to outweigh the added per-microbatch EP work. The exact optimizer cost depends on its state placement: optimizer state for the local EP-MP shard may be sharded further over EP-DP. Figure 12 therefore shows a possible operating regime, not a topology-independent speedup.

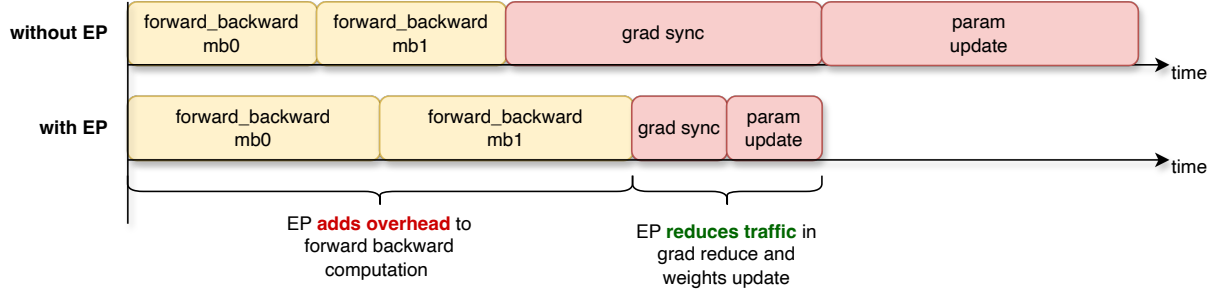


Figure 12 EP trades per-microbatch routing overhead for less parameter-sized work at the optimizer-step boundary. EP adds dispatch and combine to forward and backward, but each rank synchronizes and updates only its local routed-expert shard. With few accumulation microbatches and a large routed-expert pool, the reduction in exposed gradient-synchronization and parameter-update time can outweigh the added EP work and make end-to-end training faster. The widths are conceptual and not measured timings. Dense, router, shared-expert, and other non-sharded parameters do not receive the EP-MP reduction; optimizer-state work may be sharded further over EP-DP.

One single-node eight-B300 run illustrates this operating regime. The run used 32 routed experts, top-4 routing, fixed random routes, eight rank-local microbatches per optimizer step, and 15 measured steps (Table 6).

Execution path	Tokens/s/GPU	Peak active memory
No EP	53,512	129.3 GiB
Block all-to-all EP8	54,063	77.85 GiB

Table 6 One intra-node EP feasibility point. Conventional block all-to-all EP8 (Section 5.3) substantially reduces peak active memory while preserving similar end-to-end throughput at this operating point. Both runs completed cleanly.

In this run, EP reduced peak active memory by 51.45 GiB at similar throughput. As a single end-to-end feasibility point, it does not show whether reduced expert-gradient synchronization and optimizer-boundary work caused the 1.0% throughput difference, nor does it measure variance or generalize beyond this intra-node configuration. Section 5.3 examines the costs of the block all-to-all implementation used for this comparison.

Per-rank routed activations stay roughly constant as the EP-MP degree grows. Let each rank originate T tokens before routing. Without EP, the rank processes approximately TK routed rows. An EP-MP group of size M_E contains M_ET source tokens and distributes the resulting $M_E TK$ routes over M_E expert ranks. Under balanced routing, each rank therefore still processes approximately TK routed rows. Increasing M_E reduces the number of local experts and their persistent training state, but not the average routed rows or capacity-sized communication buffers per rank. Once the local expert shard is small, activations and other execution working memory set a floor, so larger EP-MP degrees provide diminishing peak-memory savings.

Dense and expert parameters use different reduction groups. A dense gradient must be reduced across all D dense-DP replicas. An expert gradient must instead be reduced across the D_E ranks that hold copies of that exact EP-MP shard. Reducing expert gradients across EP-MP would mix different experts;

reducing dense gradients only across EP-DP would leave dense replicas out of agreement. The multi-group reducer introduced in Section 4 assigns each gradient bucket to its corresponding replica group.

Figure 13 shows both group types for the four-rank example.

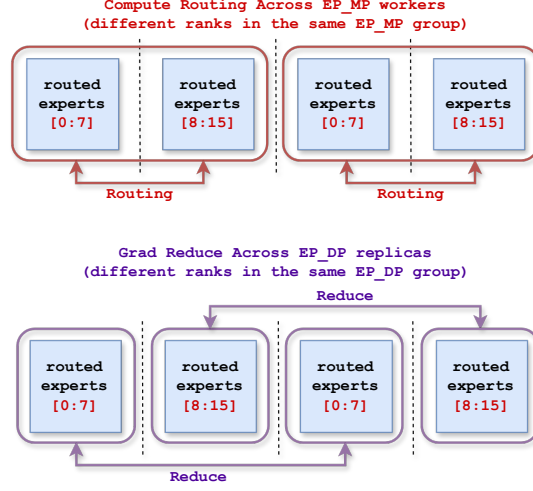


Figure 13 EP-MP routes tokens; EP-DP reduces gradients. Within each EP-MP group, different ranks hold different expert shards, so routed token rows move between those ranks for expert computation. Within each EP-DP group, ranks holding replicas of the same expert shard reduce that shard’s gradients together: experts 0–7 reduce with their replicas, and experts 8–15 reduce with theirs. Token communication and gradient reduction therefore use different rank groups.

EP adds token communication. Before EP, every chosen expert is local to the token-source rank. After the expert pool is sharded, a remote route must dispatch its input row to the expert rank and combine the resulting contribution back at the token-source rank. This communication occurs in every routed layer and every microbatch, not only once at the global-step boundary. The reduced expert memory and gradient traffic therefore come with additional dispatch and combine communication. The next subsection compares these execution paths.

5.2 EP Adds Communication to Dispatch and Combine

MoE dispatches and combines even when every expert is local. A dense MLP applies the same local computation to every token. It has no router, expert-order permutation, or token communication. An MoE layer without EP first chooses experts for each token, permutes the accepted routes into expert-contiguous order, executes the grouped expert MLPs, and then unpermutes and combines the expert outputs. The permutation is local dispatch; the final unpermutation and weighted reduction are local combine. Grouped GEMM requires this expert-contiguous layout even though no rows cross ranks.

EP extends dispatch and combine with an all-to-all exchange. Conventional all-to-all EP extends local dispatch to permute–all-to-all–permute and local combine to unpermute–all-to-all–unpermute. Figure 14 compares this operator path with dense and local-MoE execution. Section 5.3 derives the intermediate layouts and identifies the two additional peer-major/expert-major conversions beyond the local-MoE path.

Conventional all-to-all EP adds layout and synchronization work beyond the transfer itself. Relative to local MoE, it adds a rank exchange, up to two additional layout passes, peer-packed buffers, launches, and synchronization around the useful expert GEMMs. These EP-specific costs can remain on the critical path even when network bandwidth is sufficient; Section 5.3 traces them to concrete operations.

Comparing these execution paths fairly requires giving every path the same inputs, routes, and expert work; otherwise a routing or workload difference can be mistaken for an execution-path improvement. The profiled

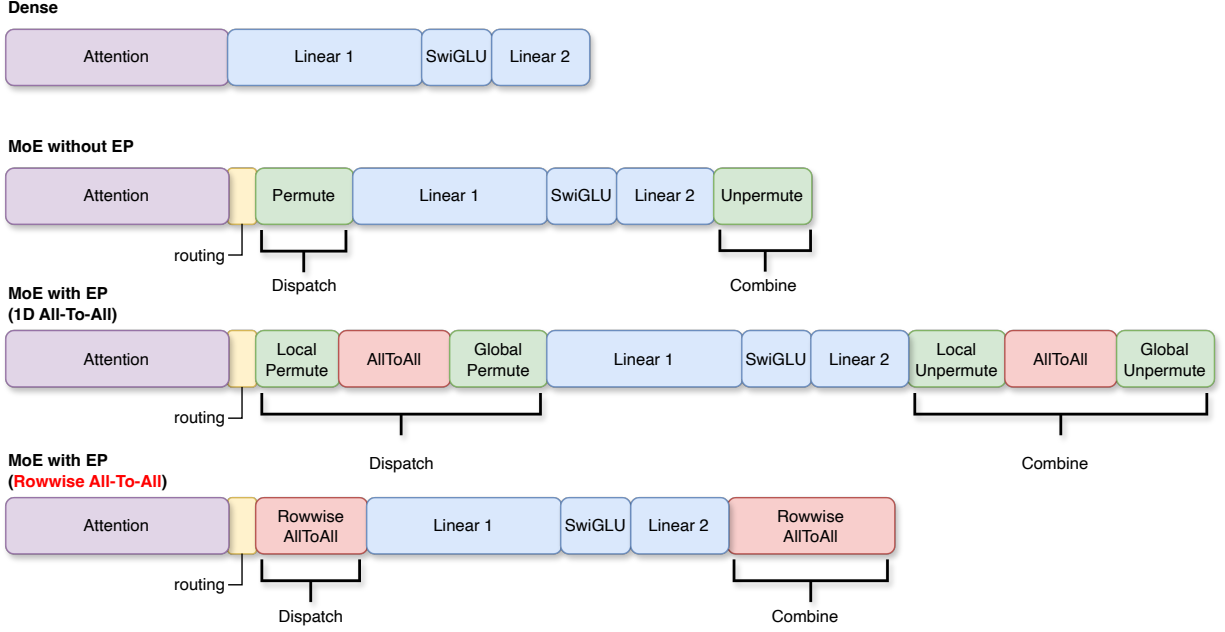


Figure 14 Routing overhead grows from dense execution to local MoE and conventional all-to-all EP. A dense MLP has no routing path. MoE without EP adds one local permutation into expert order and one unpermutation back to token order. Conventional all-to-all EP expands dispatch into permute–all-to-all–permute and combine into unpermute–all-to-all–unpermute. Rowwise EP instead attempts to move selected rows directly between token-source and expert ranks. The drawing is not performance evidence.

comparison in Section 5.4 matches these factors. End-to-end training speed is a separate question, because EP also changes the gradient-synchronization and optimizer work at the step boundary.

5.3 Packed All-to-All Requires Peer-Contiguous Blocks

Block all-to-all moves one contiguous block per peer. We call the conventional path **block all-to-all EP**: its transport moves one contiguous block of rows per peer rank, never individual token rows. The path expresses dispatch with PyTorch variable-split `all_to_all_single` on an NCCL process group (PyTorch Contributors, 2026b; NVIDIA, 2026f). Each rank supplies one flat send buffer partitioned into a contiguous slice per destination and receives a contiguous slice per source. The call cannot scatter arbitrary token rows directly into arbitrary remote expert slots. The sender must therefore pack all accepted routes for destination rank 0, then destination rank 1, and so on. This peer-block packing is a common expert-parallel implementation pattern (Hwang et al., 2023; Yan et al., 2026). Figure 15 traces the complete packing path for a two-rank example.

Expert order requires a second layout change. After the transfer, the receive buffer is grouped by source rank, not by the local expert that will process each row. A second permutation places those rows into expert-contiguous intervals before grouped GEMM. Combine reverses the layout changes: it converts expert order into source-rank blocks, returns those blocks through the reverse all-to-all, and then restores token order and applies the router weights. The outer token-to-expert and expert-to-token conversions are already present in local MoE. With multiple local experts, packed peer exchange can require two additional peer-major/expert-major conversions, for four passes total; with one local expert, the extra pair is skipped.

Dynamic peer-block lengths create a host dependency in the current path. Because routing changes the peer-block lengths every microbatch, Olmo-core’s implementation converts GPU-produced peer counts into host split lists before launching the variable-split exchange; when we emphasize this host depen-

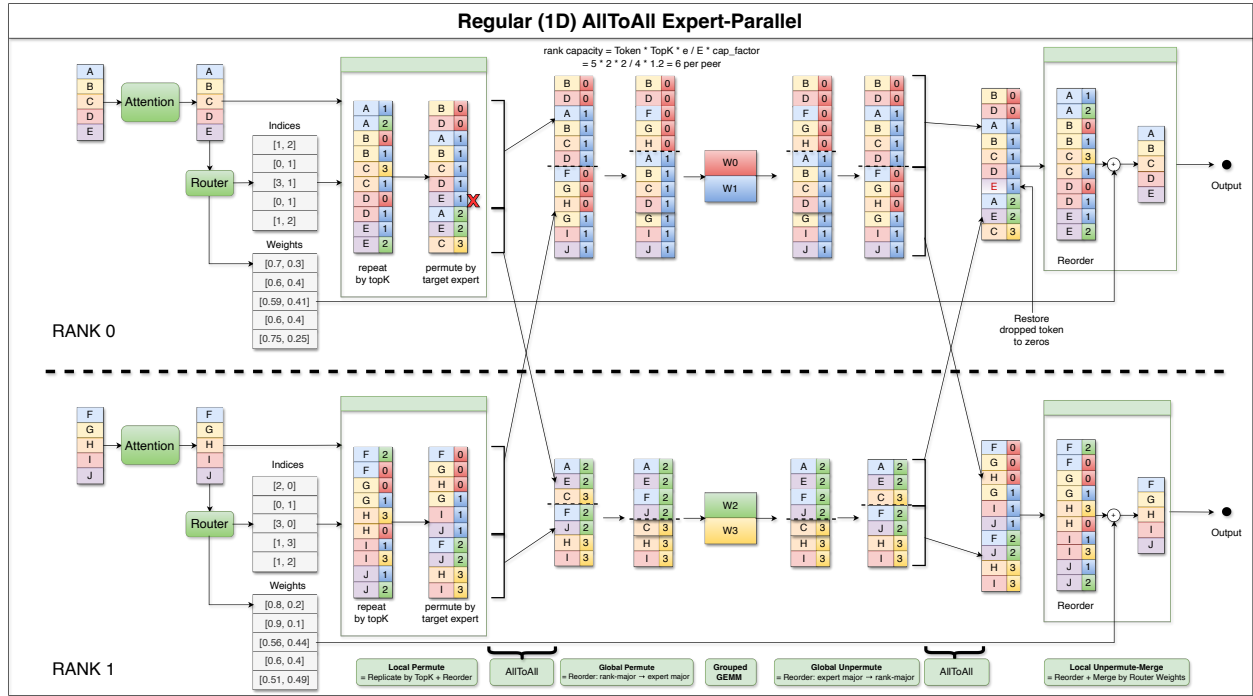


Figure 15 Block all-to-all EP exposes the complete packing path. In this illustrative two-rank, top-2 example, local dispatch replicates token rows and packs routes by destination rank. The first all-to-all exchanges peer-contiguous blocks, and a global permutation converts the received rank-major layout into local-expert order for grouped GEMM. Combine reverses the global layout conversion and all-to-all, restores token order, fills a capacity-dropped route with zero, and merges route contributions using the router weights. The drawing explains data layout and movement, not measured performance.

gency, we call it the *synchronized* path. Section 8.4 explains how this device-to-host dependency reduces submission headroom and how independent work can cover, but not remove, the wait.

Faster links shrink only the all-to-all itself. The peer/expert layout conversions, peer-packed buffers, and this implementation’s host dependency remain. Network bandwidth alone therefore cannot explain the cost of the complete block all-to-all path.

5.4 Rowwise EP Removes Block Packing

Rowwise EP transfers each row directly to its expert slot. Rowwise EP replaces block packing with direct row placement: each accepted token row is transferred on its own, straight into the destination buffer row where its selected expert expects it. For T local tokens and top- K routing, Olmo-core constructs two GPU tensors of shape $[T, K]$. One gives the destination EP-MP rank for each accepted route; the other gives the row in that rank’s expert-capacity buffer. Negative entries represent invalid or capacity-dropped routes; Section 10.3 defines the capacity policy and its drop metrics, and in stable training the routing distribution stays nearly dropless. A dispatch kernel uses these two indices to move x_t directly to its destination row. The communication output is already expert-contiguous on each destination rank, so grouped expert computation does not require a packed peer buffer or a second permutation.

The destination row is deterministic. The route-map builder combines the destination expert, the number of earlier accepted routes for that expert, and the offsets of the preceding local experts. It also applies the capacity decision before communication. The map therefore records both the remote destination rank and the precise row consumed by the selected expert. Route counts and overflow metadata remain on the GPU; they are not converted into host split lists for the data movement. Direct placement presupposes that a kernel on the token-source rank can write a row that lives on the expert rank. Section 5.5 introduces the

symmetric-memory and GPU-initiated communication (NVSHMEM/RDMA) mechanisms that make remote rows addressable.

Rowwise EP adds indexing and ordering costs. Rowwise movement replaces a small number of block transfers with many indexed row transfers and adds route-map construction, fixed-capacity storage, and explicit write-ordering between communication and compute. It is beneficial only when those costs are lower than the permutations, temporary buffers, and host stalls of the block all-to-all path. Its end-to-end advantage depends on expert shape, EP degree, route imbalance, and network topology, which the current measurements only partly cover.

Figures 15 and 16 make the layout difference explicit. The block all-to-all path packs accepted routes into contiguous destination-rank blocks, exchanges those blocks, and then reorders the received rows into local-expert order. Combine reverses both layout conversions. Rowwise EP instead uses the GPU route map to place each accepted row directly in its destination expert-capacity slot and reverses that indexed movement during combine. It removes packed peer buffers and up to four explicit layout conversions; it does not remove routing, communication, grouped expert computation, or the synchronization that orders remote writes between ranks.

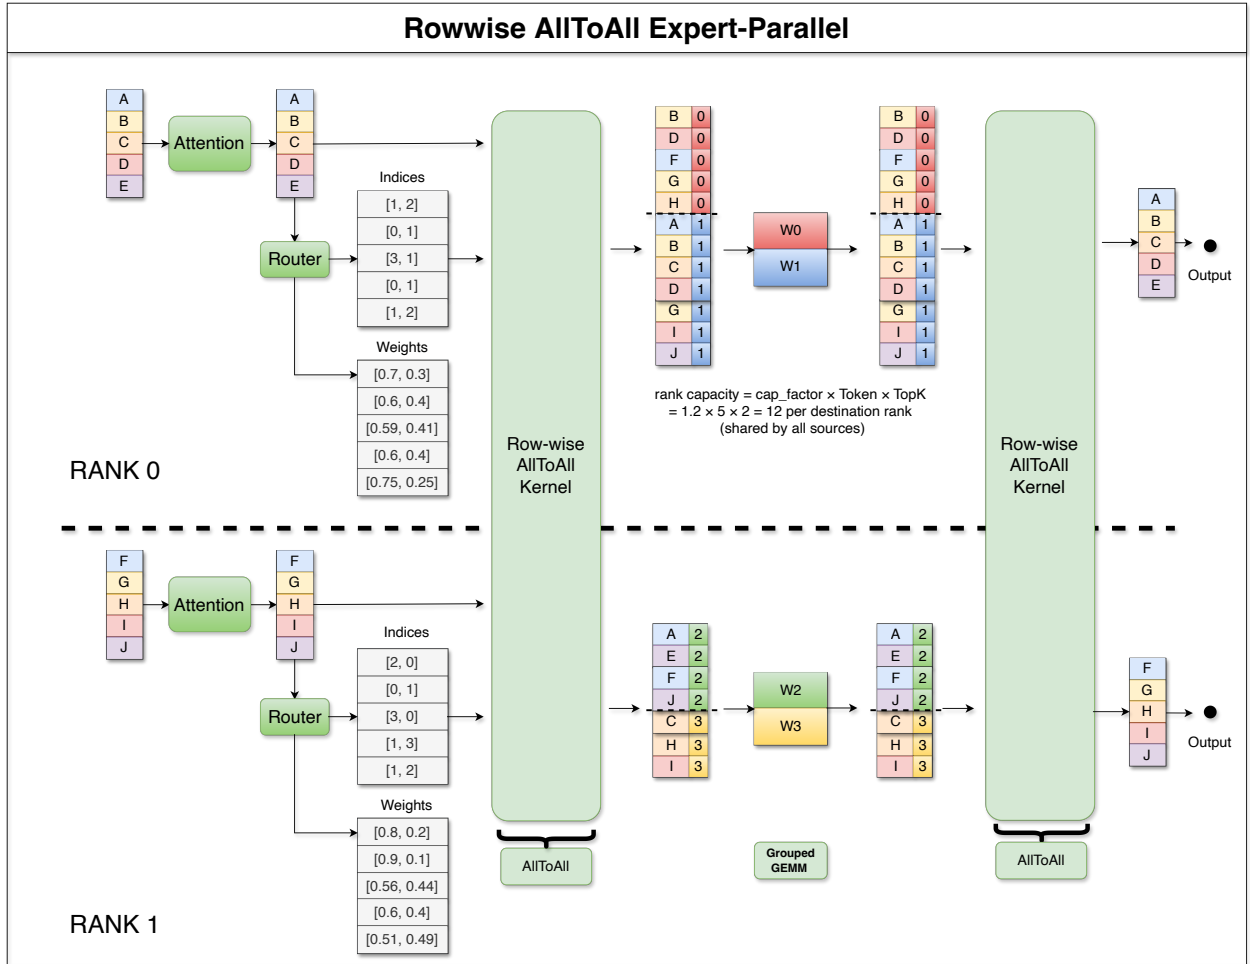


Figure 16 Rowwise EP targets remote expert rows without block packing. In the same illustrative two-rank, top-2 example as Figure 15, GPU-resident route indices drive a rowwise dispatch kernel that places accepted rows directly into fixed-capacity rank- and expert-major storage. Grouped GEMM consumes that layout without a second permutation. Rowwise combine returns expert outputs directly to their source-token positions for weighted merging, without materializing a peer-packed return buffer. The “AllToAll” labels inside the drawing denote the logical rank exchange; the implementation uses indexed one-sided row movement rather than an NCCL all-to-all collective. The drawing explains data layout and movement, not measured performance.

Table 7 groups the displayed ranges from one inspected rank-0 MoE forward instance in each of two configuration-matched traces, each captured on one node with eight B300 GPUs. Both use an eight-layer BF16 model with 128 routed experts, top-8 routing, no shared expert, EP8, and four sequences per rank microbatch. The traces were captured on different nodes, so the comparison is mechanism evidence rather than a controlled performance result.

Phase	Block all-to-all EP		Rowwise EP	
	Operation	ms	ms	Operation
Dispatch	Local permute	0.351	2.298	Route-map build + row dispatch
	All-to-all	1.960		
	Global permute	0.532		
Compute	Grouped GEMM	3.630		
Combine	Global unpermute	0.712	2.423	Row gather + weighted reduce
	All-to-all	1.970		
	Local unpermute + merge	0.391		
Dispatch + combine		5.916	4.721	

Table 7 A single profiled forward example localizes the rowwise saving. The rowwise path is 20.2% shorter across the displayed non-expert ranges while the displayed routed-expert computation is identical. Durations are manually transcribed from one Nsight Systems instance per path, not repetition means or an additive decomposition of complete step time.

Figure 17 shows the same example as two cumulative-duration paths: three explicit block-path stages on each side of expert computation versus one aggregated rowwise phase.

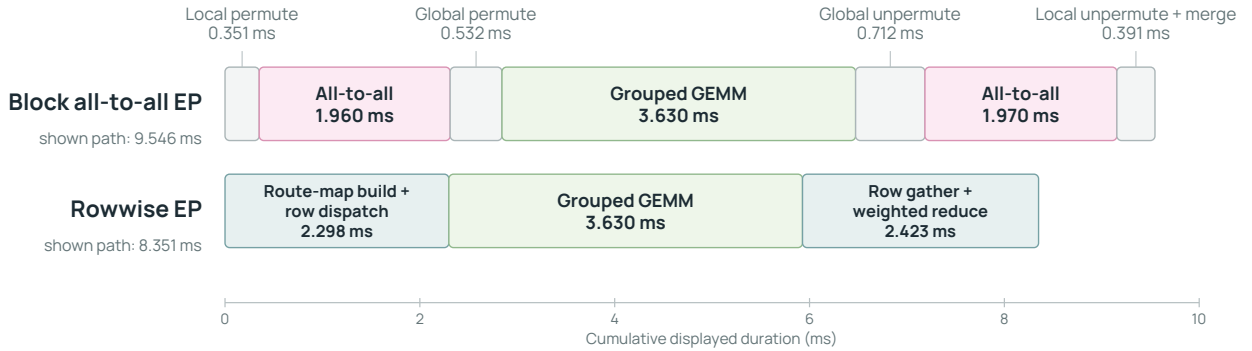


Figure 17 Rowwise EP removes the block-packing stages around expert computation. Block all-to-all EP exposes separate layout and collective stages in dispatch and combine. Each rowwise phase aggregates two displayed subranges: route-map construction plus row dispatch, or row gather plus weighted reduction. Horizontal width shows cumulative displayed duration within each trace, not temporal alignment between traces. The traces were captured on different nodes, so this is mechanism evidence rather than a controlled performance comparison.

This example is consistent with the intended mechanism: rowwise replaces four explicit layout transformations and two peer-block collectives with a GPU-resident route map and indexed row movement, with device route-map construction included in the rowwise total. The displayed ranges exclude the block path’s host split-list wait (Section 8.4). This instance identifies the affected operations but does not establish the size of the saving across workloads and networks.

Direct placement also lets communication use the MXFP8 representation consumed by grouped GEMM. Olmo can quantize rows during dispatch, let expert grouped GEMM consume the received qdata (quantized data) and scales directly, and return quantized outputs before local reduction. Communication and expert compute thus share one representation without an intervening BF16 materialization. Section 11.4 follows the integrated forward and backward path.

5.5 Symmetric Memory Addresses Remote Rows

Direct placement requires a remote address. Ordinary device pointers name local memory. Symmetric memory gives the participating ranks corresponding regions in a symmetric heap, so a local offset together with a peer-rank index names the matching remote location (Figure 18). In the current Olmo-core setup, each EP-MP process group forms the NVSHMEM bootstrap world used by its rowwise kernels. All ranks in that group allocate the same set of buffers, with matching shapes and allocation order (NVIDIA, 2026t).

Olmo-core uses NVSHMEM because it permits GPU-initiated one-sided operations. A CUDA kernel can issue a **PUT** to a remote expert row or a **GET** from one without first constructing a host-managed peer block. This does not mean that NVSHMEM is universally faster than NCCL. It provides the addressability and fine-grained movement required by this particular rowwise design (NVIDIA, 2026t,h).

Safe buffer reuse is a separate problem from addressability. A symmetric pointer may remain valid while the value at that address is still needed by an earlier microbatch. Every rank must agree on buffer capacity and initialization before communication begins, and the runtime must prevent a later operation from overwriting a row until its final forward or backward consumer has completed. Matching allocations alone cannot prevent premature reuse; the runtime also needs explicit ordering and buffer-reuse rules.

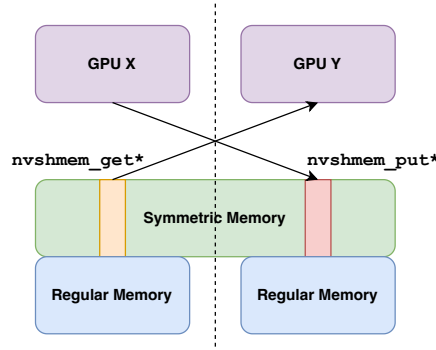


Figure 18 Symmetric memory makes matching offsets remotely addressable. Participating EP-MP ranks create corresponding heap regions. A local offset and a peer-rank index therefore identify the matching remote location, allowing a GPU kernel to address an expert-capacity row directly. The allocation establishes addressability; ordering and buffer-reuse rules still determine when a row may be read or overwritten.

5.6 Routes Use PUT and GET

MoE operations and transport directions are distinct. Dispatch and combine describe the MoE computation; PUT and GET describe the direction of the one-sided transfer. Table 8 shows the mapping used by the rowwise path.

MoE operation	Transfer	Row movement
Dispatch forward	PUT	The token-source rank pushes x_t to the capacity row assigned to the selected expert.
Combine forward	GET	The token-source rank pulls the selected expert outputs and performs the router-weighted reduction locally.
Combine backward	PUT	The token-source rank pushes each router-weighted output gradient to the corresponding expert-output gradient row.
Dispatch backward	GET	The token-source rank pulls the route gradients and sums them into the gradient of the original token row.

Table 8 Forward and backward use adjoint row movements. The saved route map is shared by all four operations. Backward reverses each forward movement, so dispatch and combine swap transport directions in the backward pass.

Fan-out favors source-initiated PUT. A top- K token row may need to reach several expert ranks. With PUT, the token-source rank reads its local row and writes each route into a distinct remote capacity slot. Expressing the same fan-out as destination-initiated GETs makes several peers read the same remote source row, concentrating access pressure at that source (Figure 19).

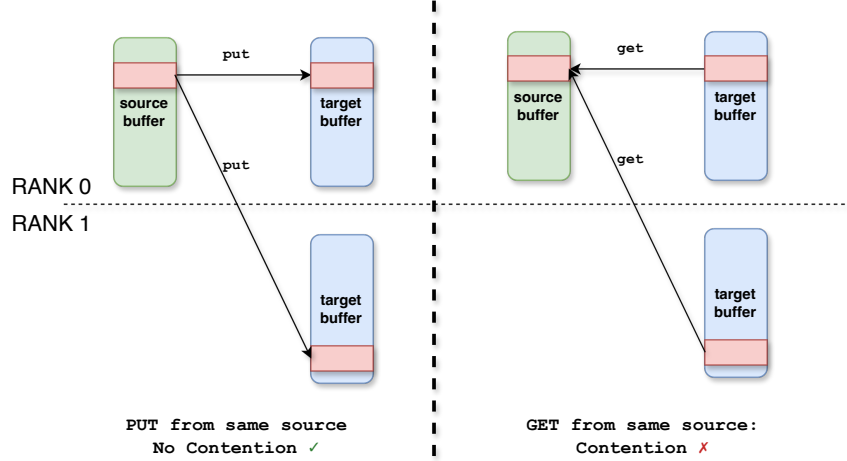


Figure 19 PUT fan-out writes distinct destinations; GET fan-out converges on one source. On the left, one rank issues PUTs from a local source row into separate remote target rows. On the right, multiple target ranks issue GETs against the same remote source row. The arrows show which rank issues the one-sided operation toward the remote address. The check and cross refer only to same-source access contention: PUT kernels still share memory bandwidth, streaming multiprocessors (SMs), and fabric resources with other work.

Forward dispatch writes directly into expert-contiguous capacity storage. The expert rank then runs grouped expert computation over the valid row intervals. Forward combine gathers the K selected expert rows for each local token, multiplies them by their router weights, and sums them into token order. The custom autograd functions save the route map so backward applies the exact transpose movements in Table 8. The router-weight gradient uses the gathered expert outputs and the token-output gradient from the same accepted routes.

Invalid routes remain explicit throughout this path. Rowwise PUT kernels skip negative destinations; combine gathers zero for invalid entries before the local reduction. Capacity handling is therefore part of the route map rather than an implicit property of unwritten memory.

5.7 Buffer Reuse and Ordering Are Explicit in Rowwise EP

A microbatch fills only a prefix of each capacity buffer. Rowwise communication reserves capacity-sized destination buffers, but a microbatch usually writes only a prefix of the rows assigned to each local expert. Unwritten tail rows may contain values from an earlier use. Expert forward and backward therefore receive the real per-expert row offsets, and grouped GEMM and the expert weight-gradient GEMM (Wgrad) skip the unwritten tails. Clearing the whole capacity buffer is useful as a diagnostic, but it adds unnecessary memory traffic to the normal path.

Direct access avoids staging copies but extends buffer use into backward. Grouped GEMM reads the symmetric dispatch buffer in place instead of copying its contents into a regular tensor. Its saved Wgrad input therefore remains in the same buffer that a later dispatch could overwrite. Figure 20 shows where direct access removes copies; the resulting buffer-reuse constraints depend on how long each consumer needs the data.

Reusing buffers across blocks saves memory but can overwrite saved payloads. Symmetric buffers are allocated collectively and stay resident, so giving every MoE block private symmetric buffers makes resident symmetric memory grow with the number of local blocks. Sharing buffers across blocks removes that growth, but forward and backward visit blocks in opposite orders: block $\ell+1$'s dispatch would

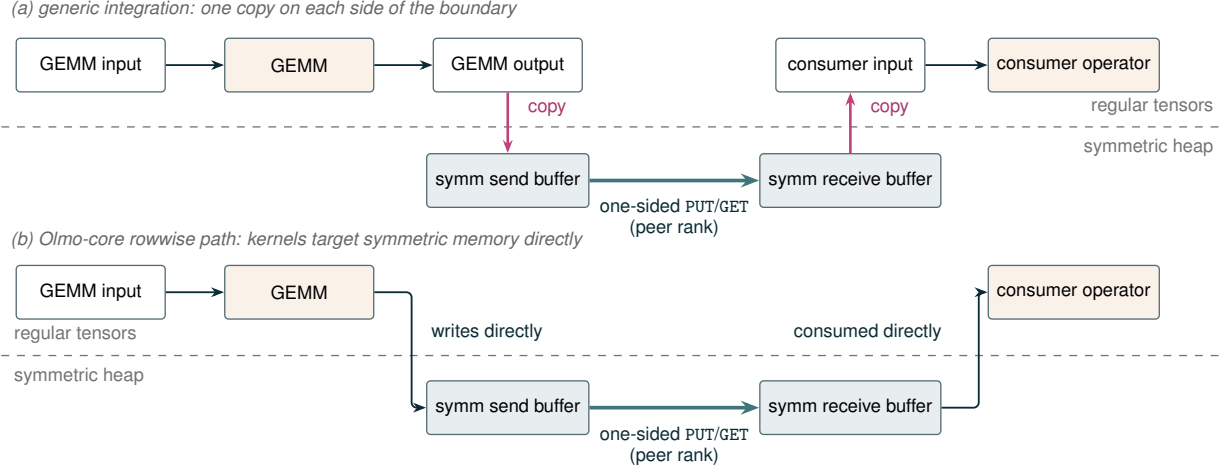


Figure 20 Crossing the regular-symmetric boundary: staging copies versus direct access. The remote endpoint of a one-sided transfer must live in the symmetric heap, which is allocated separately from regular PyTorch tensors; inter-node GPU-initiated transfers require the local endpoint to be symmetric as well. (a) A generic integration pays one copy on each side of the boundary. (b) The Olmo-core rowwise path removes these copies where kernels can target symmetric memory directly: the expert grouped GEMM reads the dispatch buffer in place, the down projection writes its output directly into the symmetric combine buffer, and MXFP8 dispatch fuses quantization into the PUT kernel. Conceptual illustration with no measured quantities.

overwrite the payload that block ℓ saved, long before block ℓ 's backward reads it (Figure 21). Whether a buffer faces this hazard is decided by its immediate consumer. The dispatch buffer feeds the up-projection grouped GEMM, which saves its input for Wgrad, so the buffer must survive until backward. The expert-output buffer is only read by the combine transfer, and backward re-routes gradients with the saved route map (the router-weight gradient uses a separate gather capture on the token-source rank), so it is scratch and may be reused as soon as the transfer completes.

Autograd determines when a buffer may be reused. Under pipeline parallelism, several later forwards may execute before the Wgrad that reads a block's saved dispatch payload. Remote writes through custom communication kernels are not protected by PyTorch's ordinary tensor version checks, so Olmo-core attaches autograd-held leases to symmetric payloads that remain visible to backward. Each lease prevents reuse until the corresponding autograd node releases it after its final consumer. When activation checkpointing recomputes the payload for backward, the original forward can instead use shared scratch storage. Figure 22 shows how a lease keeps a dispatched payload available for its backward consumer.

One-sided communication requires explicit ordering. Expert compute must not read a destination row before all required dispatch writes are visible. A buffer must not be overwritten while a peer is still reading it, and all ranks participating in a barrier or collective kernel must enter a compatible operation order. The rowwise path uses stream ordering and NVSHMEM completion operations around these phase boundaries. Removing the host split-size wait does not remove distributed synchronization; it moves the required agreement and completion into the GPU execution path (NVIDIA, 2026h).

MXFP8 adds a reuse constraint between quantized activations and gradients. As on the BF16 path, Wgrad needs the dispatched input. A BF16 route carries one row; an MXFP8 route carries qdata and scale rows that follow the same destination indices and validity mask. Backward must consume both saved components before the slot is reused for quantized gradient rows. This shared-buffer constraint is one reason Olmo-core fuses dispatch, expert computation, and combine into a single autograd node on the MXFP8 path (Section 11.4).

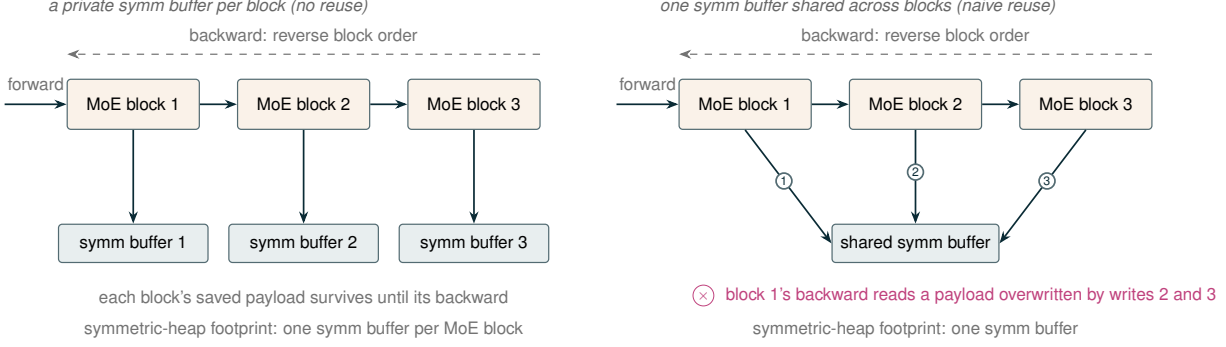


Figure 21 A shared symmetric buffer saves memory but can overwrite saved payloads. With a private symmetric buffer per block, each saved payload survives untouched until its block’s backward, but resident symmetric memory grows with the number of local blocks; one shared buffer keeps the footprint constant, but forward visits blocks in order 1, 2, 3 while backward returns in order 3, 2, 1, so block 1’s backward reads a payload that later blocks have overwritten. Scratch buffers, which no later operation reads, safely take the shared path; payloads saved for backward keep per-block slots whose reuse is controlled by the lease system of Figure 22, and activation recomputation turns a saved payload back into scratch, restoring the shared option. Conceptual illustration with no measured quantities.

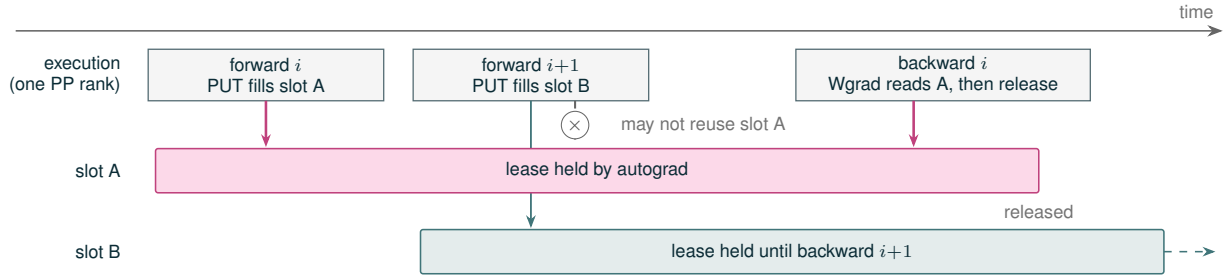


Figure 22 A lease pins the dispatch buffer until its backward consumer finishes. The routed grouped GEMM saves the dispatch buffer as its Wgrad input, so an autograd-held lease pins the slot until the backward that consumes it releases it, and a later forward acquires a different slot from a pool sized before training starts. Conceptual illustration with no measured quantities.

5.8 DeepEP v2 Provides an Optional EP Backend

DeepEP v2 is an effective inter-node alternative. Olmo-core can select DeepEP v2 for dispatch and combine while retaining its router, capacity policy, expert kernels, autograd integration, and optimizer (Zhao et al., 2025b). DeepEP v2 is block-oriented like the path in Section 5.3: it exchanges per-peer batches of rows rather than individual rows. The difference is that packing, transfer, and unpacking happen inside its dispatch and combine calls with GPU-resident metadata, so the model-facing path keeps no host split lists.

Block transfers reduce the NIC request rate. The block orientation matters most across nodes. Within a node, NVLink transfer time is governed mainly by payload bytes, so rowwise EP’s many small row transfers cost little beyond the bytes they move. Across nodes, every transfer becomes a request that the network interface controller (NIC) must process, and a pattern that issues one request per route can saturate the NIC’s message rate before it saturates link bandwidth (Section 7 describes the GPU-to-NIC submission path). Aggregating rows into a few large per-peer transfers keeps the request count low. Our observations are consistent with this reasoning, though we have not measured the attribution. DeepEP v2 has performed well in our current inter-node experiments, which makes it useful when an EP-MP group spans nodes (on our eight-GPU nodes, EP-MP degrees greater than eight); rowwise EP remains the production intra-node path.

The trade-off is integration depth. Olmo-core does not control DeepEP’s dispatch/combine kernels and public interface, so it cannot specialize every communication boundary as freely as it can in the rowwise

backend. In the current MXFP8 integration (Section 11), forward dispatch transports E4M3 data with E8M0 scales and the expert GEMMs use MXFP8. Forward combine, cached backward dispatch, and backward combine remain BF16. Extending MXFP8 across those remaining communication legs would require new DeepEP kernels and interfaces, not only an Olmo-core configuration change. We therefore use DeepEP v2 as an inter-node option and rowwise EP where its closer integration with Olmo-core’s communication, precision, and autograd implementation is useful.

5.9 Overlap Is Not Free: Resource Contention

A **wave schedule** splits a microbatch’s routed work into waves and attempts to dispatch wave $i+1$ and combine wave $i-1$ while the experts compute wave i . The idea comes from DeepSeek’s inference systems, where Mega MoE in DeepGEMM fuses EP dispatch, the expert MLP, and EP combine into one persistent megakernel that overlaps communication with tensor-core computation (DeepSeek-AI et al., 2026; Zhao et al., 2025a). We adopted the schedule for training but not the megakernel: the Olmo-core wave path launches ordinary dispatch, grouped-GEMM, and combine kernels on separate streams, so the overlapped stages compete for the same GPU resources instead of sharing one kernel’s internal schedule. Wave execution can hide exposed communication, but it also turns one large expert batch into several smaller grouped GEMMs. A complete comparison needs three schedules: no-wave phase-sequential execution, wave-sequential execution, and wave-overlapped execution. Wave-sequential execution is the control that separates the cost of smaller GEMMs from the cost of concurrent kernels. Our archived experiments lack it, so they show whether the complete wave schedule was faster but cannot split the difference between the two causes.

Let T_{comm} and T_{gemm} be the standalone times for communication and expert computation. Sequential execution costs $T_{\text{comm}} + T_{\text{gemm}}$. After overlap, the same operations may stretch to $\tilde{T}_{\text{comm}}$ and $\tilde{T}_{\text{gemm}}$ as they contend for GPU and communication resources, so the overlapped schedule takes $T_{\text{overlap}} \geq \max(\tilde{T}_{\text{comm}}, \tilde{T}_{\text{gemm}})$. Overlap improves elapsed time only if

$$T_{\text{overlap}} < T_{\text{comm}} + T_{\text{gemm}}. \quad (10)$$

Figure 23 makes the no-wave and wave-overlapped order concrete with one measured forward instance at a 32-SM communication budget; the missing wave-sequential control cannot be inferred from it.

Expert computation takes longer in the wave trace. Figure 23 shows real communication–compute concurrency, yet the displayed wave forward interval is 3.429 ms longer and its expert–compute intervals grow by 15.1% in aggregate. Across the full profiles, the three dominant grouped-GEMM kernel families accumulated 4.63 s in the no-wave trace and 5.74 s in the wave trace. The wave schedule both split the expert work into four smaller grouped GEMMs and ran DeepEP kernels beside them, so these profiles cannot assign the additional time uniquely to GEMM granularity or concurrent resource contention.

Concurrent rowwise communication slows expert GEMM. In a separate two-node, 16-GPU diagnostic with EP-MP = 16, 16,384 tokens per rank, top-8 routing, and $d = h = 6,144$, we launched either a rowwise NVSHMEM dispatch or combine transfer concurrently with one grouped expert workload while sweeping the communication launch width from 1 to 128 blocks. Table 9 reports the GEMM stretch and the makespan, the total elapsed time of the concurrent pair. Concurrent communication slowed the grouped GEMM by roughly a quarter at every launch width, and shrinking the communication launch to a single block did not avoid the GEMM slowdown; it stretched communication by an order of magnitude.

GEMM stretch alone, however, does not decide the outcome. At the 128-block launch, overlap still shortened the pair’s makespan by 22–25% relative to sequential execution: the wide launch finished communication soon enough to hide behind useful work despite the contention tax, while the one-block launch did not.

The complete wave candidate did not beat its no-wave baseline. A two-node DeepEP v2 sweep measured BF16 forward and backward for EP-MP = 16, 128 experts, top-8, 16,384 tokens per rank, and $d = h = 8,192$. The four-wave path used an expert-major static layout and overlapped dispatch, expert compute, and combine. Figure 24a shows that it remained slower than no-wave execution at every matched communication-SM setting.

Communication-Compute Overlap Is Not Free

Forward pass - DeepEP v2, EP16, 32-SM communication budget

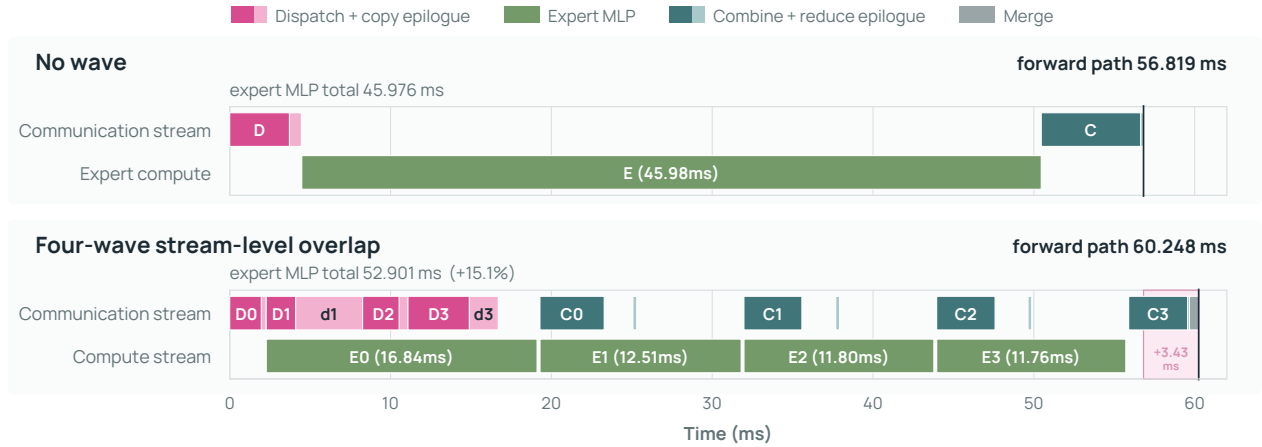


Figure 23 Communication-compute overlap lengthens this measured forward path. This two-node DeepEP v2, EP-MP = 16, 128-expert, top-8 BF16 benchmark uses 16,384 tokens per rank, $d = h = 8,192$, and a 32-SM communication budget. Both panels align time to the first dispatch. The four-wave path overlaps communication-stream work with expert computation, but its displayed forward interval is 60.248 ms versus 56.819 ms without waves, a 6.0% increase. Its four expert-compute intervals total 52.901 ms versus 45.976 ms for the single no-wave interval, a 15.1% increase. Durations are manually transcribed from one rank and one measured iteration in the two node-0 Nsight traces. The timeline establishes concurrent execution and component stretch for this instance; it does not identify the contended resource or separate wave granularity from concurrency because no wave-sequential control was archived.

Concurrent pair	GEMM time (ms)	GEMM slowdown
Grouped GEMM alone	4.645–4.679	—
GEMM + rowwise dispatch	5.736–5.874	22.9–26.0%
GEMM + rowwise combine	5.724–5.907	23.0–27.0%
Pair schedule (128-block launch)	Makespan (ms)	
Dispatch then GEMM, sequential	7.768	
Dispatch and GEMM, overlapped	5.833	
Combine then GEMM, sequential	7.560	
Combine and GEMM, overlapped	5.868	

Table 9 Concurrent rowwise communication slows the grouped GEMM, yet a wide overlapped launch still shortens the pair. GEMM-time ranges span the 1–128-block communication-launch sweep. Restricting communication to one block stretched dispatch and combine to 40.754 and 41.706 ms. Values are max-rank medians over five measured iterations with independent communication and compute buffers; the diagnostic isolates resource interference and does not reproduce the dependencies of an end-to-end MoE layer.

The sweep also shows why lowering the communication SM count is not sufficient: at four and six SMs communication became the bottleneck, while larger budgets still did not recover the no-wave time.

Overlap helps at eight SMs, but no-wave at 32 SMs is faster. A later four-node, 32-GPU source-token-major experiment is shown in Figure 24b. At the eight-SM budget, where communication dominates, four-wave execution beat no-wave for both forward and backward. At 32 SMs, no-wave was faster again and was the best measured point for both passes. Overlap can therefore help a communication-constrained configuration without improving the best configuration of the sweep.

DeepSeek-V3, Megatron-Core, DeepEP, COMET, and Lancet report overlap designs that win in their settings (DeepSeek-AI et al., 2024; Yan et al., 2026; Zhao et al., 2025b; Zhang et al., 2025; Jiang et al., 2024b). Our

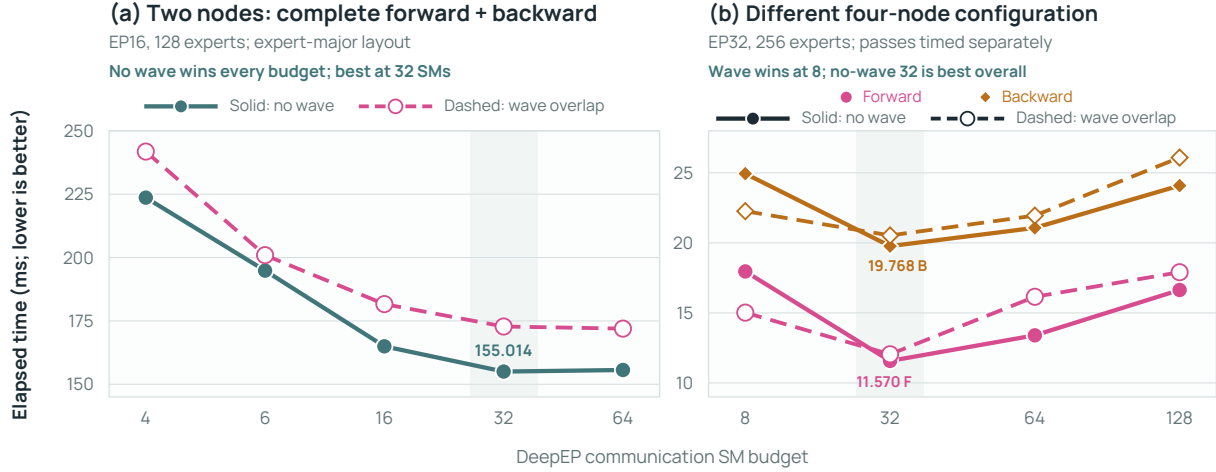


Figure 24 No-wave execution is fastest after tuning the communication-SM budget in both sweeps. The panels show absolute elapsed time with independent vertical scales; lower is better. (a) On the two-node EP-MP = 16, 128-expert, expert-major BF16 configuration, no-wave was faster at every communication-SM budget and reached its minimum at 32 SMs. (b) On a different four-node EP-MP = 32, 256-expert, source-token-major BF16 configuration, overlap beat no-wave at the communication-constrained eight-SM point. Nevertheless, no-wave at 32 SMs remained the best measured forward and backward operating point. Panel (a) reports max-rank medians over five iterations after 10 warm-ups with inter-iteration synchronization; panel (b) reports max-rank medians over five iterations after three warm-ups without that synchronization. Both are Nsight-instrumented standalone development runs.

measurements are standalone development benchmarks with five within-run timings rather than repeated training runs, and the earlier DeepEP wave layout can change communication traffic relative to no-wave execution. On this evidence, we retain phase-sequential execution as the Olmo-core reference. Replacing it with a wave backend would require a speedup over the best no-wave setting for the same shape and topology. Concurrent kernels or a lower nominal communication resource budget alone do not establish that speedup.

EP makes a larger routed-expert pool fit by sharding expert weights and gradient buffers across the existing DP ranks, and it reduces each rank’s expert-gradient-reduction payload. The cost is dispatch and combine in every routed layer and microbatch. Rowwise EP removes contiguous-block packing and host split lists by addressing remote expert rows directly, but it is worthwhile only when route construction, symmetric-buffer management, one-sided communication, and any resource contention cost less than the work they replace.

6 Pipeline Parallelism

PP distributes the layers that EP leaves replicated. Expert parallelism (EP) divides the routed experts inside every MoE layer, but it does not divide the stack of layers, dense weights, shared experts, or the activation schedule. Pipeline parallelism (PP) addresses that remaining depth-wise memory problem by assigning consecutive Transformer blocks to different stages. A stage keeps its assigned parameters, gradients, and optimizer state; complete hidden activations, rather than selected token rows, cross stage boundaries (Huang et al., 2019; Narayanan et al., 2019).

For PP degree P and EP-MP degree M_E , a balanced repeated stack gives the rough rank-local parameter count

$$P_{\text{local}} \approx \frac{1}{P} \left(P_{\text{dense}} + \frac{P_E}{M_E} \right).$$

This is an estimate of persistent training state, not a peak-memory formula. The first pipeline stage also stores the token embeddings, while the last stores the language-model head and loss. Unequal block types, communication buffers, and the number of simultaneously live activations further prevent peak memory from scaling exactly as $1/P$.

PP does not change which ranks store each parameter or which group reduces each gradient within a stage. Dense parameters still reduce over dense data-parallel groups, routed experts still shard over EP-MP, and expert replicas still reduce over EP-DP. If one stage contains $D = M_E D_E$ ranks, then a P -stage job contains $W = P M_E D_E$ ranks before context parallelism. PP adds a group connecting corresponding stage ranks; it does not replace the placement and reduction rules established in Sections 4 and 5.

PP trades schedule time for depth-wise memory. A single microbatch advances stage by stage and leaves the other stages idle. Multiple microbatches fill more of the pipeline, but they also add stage-boundary transfers, scheduler and launch overhead, and forward values that remain live until backward. We therefore use PP when depth-wise sharding is needed to fit the model, then tune the schedule to control the added bubbles, communication, and activation memory.

6.1 Olmo Uses the 1F1B Family

Interleaved-1F1B is compile-friendly because it keeps backward whole. The selected pipeline schedule uses the **interleaved one-forward-one-backward (1F1B)** family (Narayanan et al., 2019, 2021). The scheduler decides when each stage runs, but each stage still executes one ordinary, unsplit backward. The compiled model path therefore does not need to expose separate input-gradient and weight-gradient programs to the scheduler. This preserves the existing `torch.compile` and TorchInductor contract (Ansel et al., 2024) while gaining the activation-memory benefit of 1F1B scheduling.

Other schedules can reduce the symbolic bubble rate, with different memory and execution requirements. DualPipe uses opposing pipeline directions, but its published comparison requires twice the per-device parameter storage of 1F1B at the same PP degree (DeepSeek-AI et al., 2024; DeepSeek-AI, 2025b). Zero-bubble schedules instead separate input-gradient work from deferrable weight-gradient work (Qi et al., 2024b; Huang et al., 2024). Olmo’s compiled stage backward computes both in one unsplit pass, so the scheduler cannot place them separately; splitting it would require coordinating compiled operators, retained operands, recomputation, gradient accumulation, and the scheduler.

6.2 Virtual-Stage Placement Controls Activation Retention

In Olmo-core’s custom interleaved schedule, P physical PP ranks hold $2P$ contiguous **virtual stages**, two per rank. Splitting each rank’s work into two shorter chunks creates more opportunities to fill a bubble, at the cost of more virtual-stage boundaries and activation handoffs. Placement also determines how long each chunk’s forward values remain live before its backward executes.

Interleaved-1F1B uses **loop placement**: physical rank r holds virtual stages r and $r + P$ (Narayanan et al., 2021). Early pipeline stages can then retain more outstanding activations than late stages, concentrating peak memory on a few ranks. **1F1B-V**, experimental in Olmo-core, instead assigns stages r and $2P - 1 - r$ to rank r (Qi et al., 2024a). Pairing an early, long-lived chunk with a late, short-lived chunk can equalize activation memory, but it changes the bubble and communication pattern. It is a memory-balancing option, not an assumed throughput improvement. Both placements preserve unsplit backward.

Figure 25 compares the two placements for four pipeline ranks, eight microbatches, and eight virtual stages in total.

The symbolic $PP = 4$ example makes the trade concrete (Table 10). With eight microbatches, loop placement concentrates unmatched forwards on the early ranks—up to eleven on rank 0—while V placement holds six on every rank. These are schedule high-water marks, not gigabytes: stages can retain different payload sizes, and recomputation can change which values survive. Placement controls both the maximum and the skew of retained forward activations.

Placement also decides which physical rank computes the loss. The final virtual stage computes the language-model loss and begins backward, and its physical rank follows the placement rather than a rank-number convention. Loss and metric handling must therefore follow stage identity, not the highest-numbered PP rank.

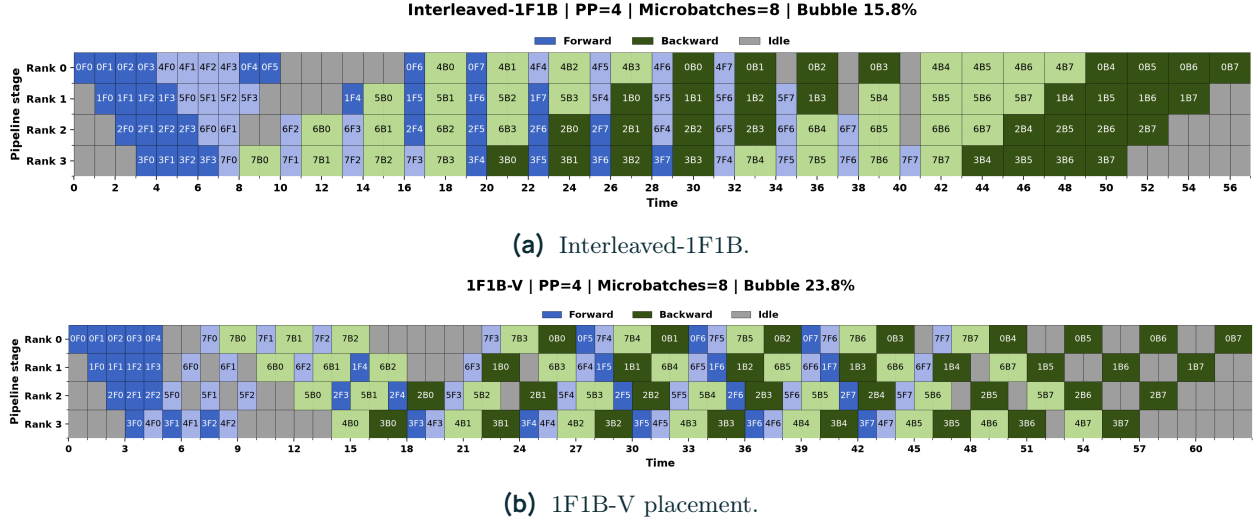


Figure 25 Interleaved-1F1B and 1F1B-V schedules with $PP = 4$ and eight microbatches. A label such as 4B2 denotes backward for virtual stage 4 and microbatch 2; the lighter forward/backward shades identify stages 4–7, the second virtual stage stored by each rank. Gray cells are empty schedule slots. The bubble percentages are empty-slot fractions in the symbolic schedule, not measured GPU idle time.

Assumed activation copy: 10 GB		Assumed persistent training state: 12 GB		Budget: 80 GB
Schedule	Rank	Peak activation copies	Illustrative peak memory (GB)	Fits assumed budget?
Interleaved-1F1B	0	11	122	✗
	1	9	102	✗
	2	7	82	✗
	3	5	62	✓
1F1B-V	0	6	72	✓
	1	6	72	✓
	2	6	72	✓
	3	6	72	✓

Table 10 Illustrative peak-memory consequence of activation-retention imbalance. This is a worked example, not a measurement. It applies the stated 10-GB-per-copy and 12-GB persistent-training-state assumptions to the symbolic $PP = 4$, eight-microbatch high-water marks using $12 + 10 \times \text{copies}$ GB. Real stages can retain unequal payloads, and recomputation changes what must remain live.

6.3 P2P Overlap

Placement fixes which stage boundaries are remote; the remaining cost is moving activations across them. Adjacent virtual stages on one physical rank use a local tensor handoff. Remote boundaries use NCCL point-to-point (P2P) communication: forward sends hidden activations to the next stage, and backward sends their activation gradients in the reverse direction. For a microbatch activation of shape $[b, s, d]$, each remote boundary moves $O(bsd)$ values in each direction per microbatch. This traffic scales with activation shape and remote-boundary count, not total model parameters. The boundary payload remains BF16 even when expert GEMMs use MXFP8 (Section 11), so each boundary value costs two bytes in each direction.

P2P overlap requires independent scheduled work. An asynchronous transfer creates overlap only when a rank can execute something that does not consume the tensor in flight. In steady-state Interleaved-1F1B, the peer’s next scheduled action can operate on another virtual stage or microbatch. Olmo can launch the transfer, execute one independent forward or backward action, and wait only when the actual consumer

is reached (Figure 26). This can reduce the exposed transfer wait; it does not remove the communication or the final dependency wait.

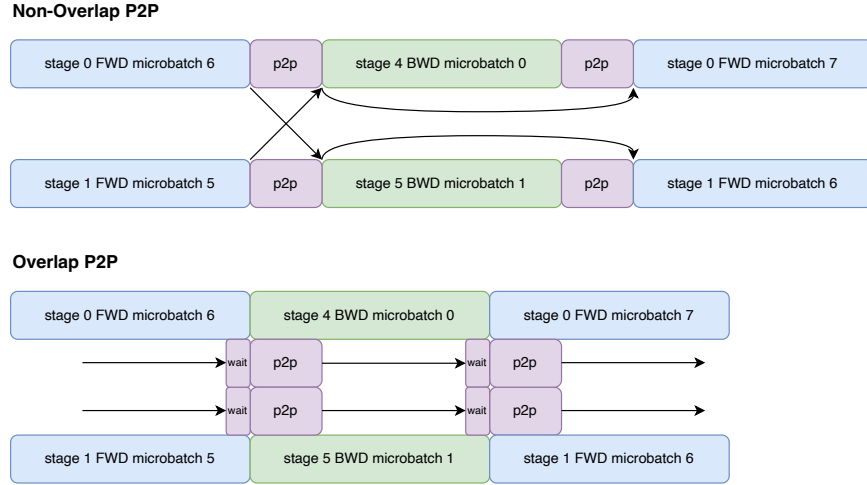


Figure 26 Interleaved-1F1B can overlap P2P communication with independent compute. Without overlap, each stage-boundary transfer is serialized between compute actions. In the steady-state Interleaved-1F1B pattern shown here, both ranks can post their transfers, execute an unrelated virtual-stage action, and defer each wait until the transferred activation or activation gradient is needed. The overlap hides only the portion of P2P time that fits inside this independent compute window.

A 1F1B-V handoff cannot be hidden when the receiving rank’s next scheduled action consumes the activation or gradient just produced by its peer. Posting that transfer asynchronously cannot start the dependent kernel earlier: the receiving rank must wait for the tensor at the same schedule step. Other V transfers can still overlap, but hiding this handoff requires changing the schedule and accepting a different bubble or memory trade-off.

Overlapped P2P still competes for shared resources. The default two-sided NCCL path requires matching send and receive participation. When stage runtimes are skewed, an early peer can leave a resident NCCL send/receive kernel waiting for its match. That kernel can contend with the Transformer kernel intended to hide the transfer, so overlapped compute may run more slowly even when the wait is not visible as an idle gap (Figure 27). Capping the resident kernel’s thread-block count shrinks its footprint but does not remove the rendezvous, and a smaller communication footprint can lengthen the transfer. As in Section 5.9, the net time saved depends on both the exposed wait and the slowdown of concurrent computation.

This contention motivated a one-sided alternative for the pipeline boundary. Prototype NCCL remote memory access (RMA) backends replace the matched send and receive with a producer-side put and a consumer-side wait placed at the latest consume point, so no resident kernel waits for a peer. The prototypes currently work only within a node, while PP boundaries usually span nodes, so the two-sided path remains the default.

6.4 PP Delays Reuse of Saved EP Payloads

An EP buffer becomes reusable only after its pipeline backward finishes. Section 5.7 introduced the hazard and the lease that guards against it: a dispatched payload saved for Wgrad must not be overwritten before its backward consumer runs. Without PP, a forward’s temporary EP buffers can often be reclaimed by the following backward. PP interleaves several microbatches, so a later forward may arrive while an earlier forward still needs its saved EP payload for weight-gradient computation. Buffer reuse must therefore follow the pipeline schedule and the point at which each saved value’s backward consumer finishes, not simply the order of forward calls. The pipeline schedule determines how many slots must exist at once.

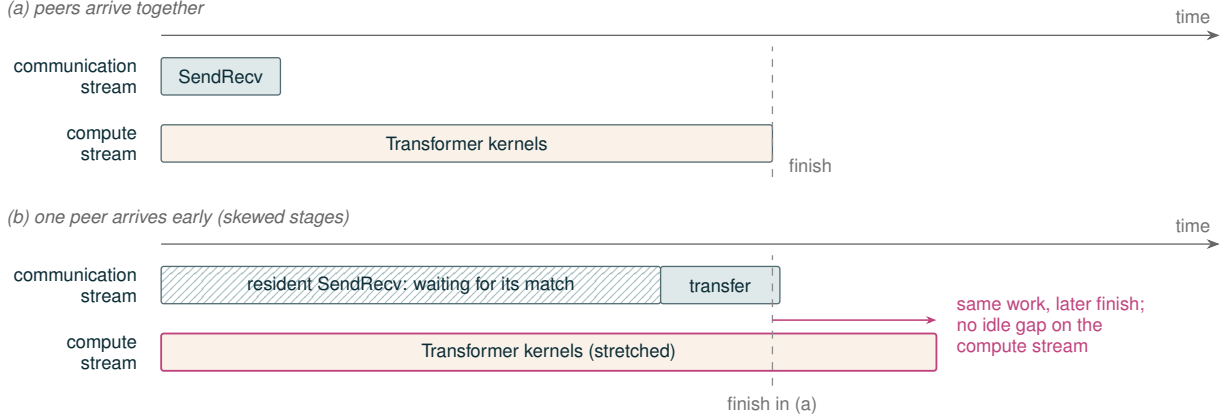


Figure 27 A resident P2P wait can slow the compute meant to hide it. With matched arrival (a), the send/receive kernel transfers and exits, and the overlapped Transformer kernels run at full speed. With skewed arrival (b), the early peer’s resident send/receive kernel occupies streaming multiprocessors while it waits for its match, so the overlapped compute stretches even though no idle gap appears on the compute stream. Conceptual illustration with no measured quantities.

Let $F_s(t)$ and $B_s(t)$ count completed forwards and backwards for stage s by schedule time t . The **outstanding-forward high-water**

$$H_s = \max_t (F_s(t) - B_s(t))$$

predicts how many stage- s payloads can be live concurrently. It sizes a buffer pool, but it does not determine when any particular slot is reusable. A slot becomes reusable only after the matching backward has consumed the saved value.

We encountered this hazard in a PP–EP correctness failure. Rowwise expert execution saved a self-managed symmetric-memory dispatch payload needed later for expert weight gradients. A later pipeline forward could reuse that storage before the matching backward consumed it. The corrupted values could remain finite in BF16, so loss finiteness alone did not rule out a silent wrong gradient; the MXFP8 form of the same bug instead surfaced as an infinite gradient norm from stale scales. The repair uses two complementary rules: the schedule high-water determines how many slots to reserve, while the saved autograd value retains a lease on its particular slot until its backward consumer finishes (Figure 22).

Two schedule features change what the lease rule must cover. Recomputation (Section 13) changes whether a value must survive from the original forward, and two-batch overlap (TBO, Section 15.3) can multiply simultaneous acquisitions within one scheduled forward.

PP peak memory therefore includes not only stage parameters but also the schedule-dependent high-water of ordinary activations, communication buffers, route metadata, and rowwise payload leases. Appendix F describes how context parallelism changes the activation shape entering this same reuse rule.

6.5 Runtime Determines Pipeline Throughput

Once a configuration fits, the microbatch schedule and stage runtimes determine its throughput. Let m be the number of pipeline microbatches in one optimizer step. Increasing m amortizes warmup and cooldown because more work occupies the steady-state portion of the pipeline. It does not make those bubbles disappear, and it is not equivalent to increasing the microbatch size. At fixed global batch, increasing m makes each microbatch smaller, which can reduce attention and GEMM efficiency and increase launch and P2P overhead per token. The useful operating point therefore balances pipeline occupancy against the efficiency of each stage invocation.

One straggling stage throttles the complete pipeline. Equal layer counts are only a starting point because embeddings, the language-model head, dense versus routed blocks, shared experts, recomputation,

and routing imbalance all change stage time. In PP recipes where the last virtual stage’s language-model head and loss would make it the straggler, we leave that stage one Transformer block lighter. For example, some nominal 32-block designs use 31 blocks while retaining split points from the 32-block partition, so the missing block comes from the final stage. This is a profile-guided recipe choice, not an automatic scheduler policy. We balance stages using measured time and memory rather than layer count alone.

Symbolic timelines omit execution costs. Generated timelines reveal action order, empty slots, activation high-water, and possible P2P overlap windows. They do not include kernel duration, transfer latency, CPU launch gaps, GPU idle time, or contention between concurrent operations. A smaller symbolic bubble can still lose to smaller microbatch kernels, an imbalanced stage, or communication interference. Pipeline throughput must therefore be measured at runtime for the complete configuration rather than inferred from the schedule diagram alone.

The production operating points in Section 14 report measured throughput for the PP4 and PP8 configurations used at scale.

7 Mapping Parallelism to Hardware

Rank placement constrains the physical communication path. Every parallelism axis in the preceding sections was defined by a process group: a list of ranks that must communicate. The list defines the participants but does not predict communication cost. Two groups of the same size may lie inside one NVLink domain or span an InfiniBand fabric. They may also communicate at different frequencies: once per optimizer step or at every routed layer. Parallelism determines what moves and how often; rank placement determines the available physical paths. Together, they affect latency, usable bandwidth, interference, and end-to-end cost.

Figure 28 recalls the logical topology from the preceding sections. PP divides layer ranges. Within each stage, EP-MP ranks hold different expert shards, EP-DP ranks hold replicas of the same shard, and dense parameters reduce over the full data-parallel group. PP groups connect matching coordinates across layer stages. The diagram leaves physical placement unspecified: the same logical edge may stay inside a node or cross the network.

7.1 Rank Order Turns a Mesh into Placement

The mesh builder arranges rank numbers. Olmo-core constructs its device mesh without consulting a switch table or adapter inventory. It orders the dense mesh as PP, then data parallelism (DP), then context parallelism (CP), so CP varies fastest. MoE layers take a second view of the same per-stage ranks, refolding the combined DP-CP pool into EP-DP and EP-MP with $DC = D_E M_E$ for CP degree C (Appendix F). Ranks are laid out in row-major order, so whichever dimension sits innermost occupies contiguous global ranks: CP in the dense view, EP-MP in the MoE view. A PP group varies the outermost dimension and strides by the width of one pipeline stage.

For the eight-rank example in Figure 28, the resulting groups are

EP-MP: [0, 1], [2, 3], [4, 5], [6, 7],
 EP-DP: [0, 2], [1, 3], [4, 6], [5, 7],
 PP: [0, 4], [1, 5], [2, 6], [3, 7].

With eight contiguous local ranks per node, EP-MP occupies the innermost, adjacent ranks, so at the production degree of eight an EP-MP group fills exactly one NVL8 domain—eight GPUs on one NVLink fabric (Section 7.4). PP groups and the replica groups, which usually span several nodes, stride across those local blocks. This layout keeps frequent, irregular EP traffic on NVLink. An EP-MP group wider than eight has to leave the node.

This mapping follows from mesh dimension order and launcher rank order, with no topology optimizer. Reordering the hostfile, changing the number of local ranks, or choosing a stage width that does not divide the node can change the physical mapping even when the parallelism degrees stay the same. Rank order therefore belongs in the recorded performance configuration.

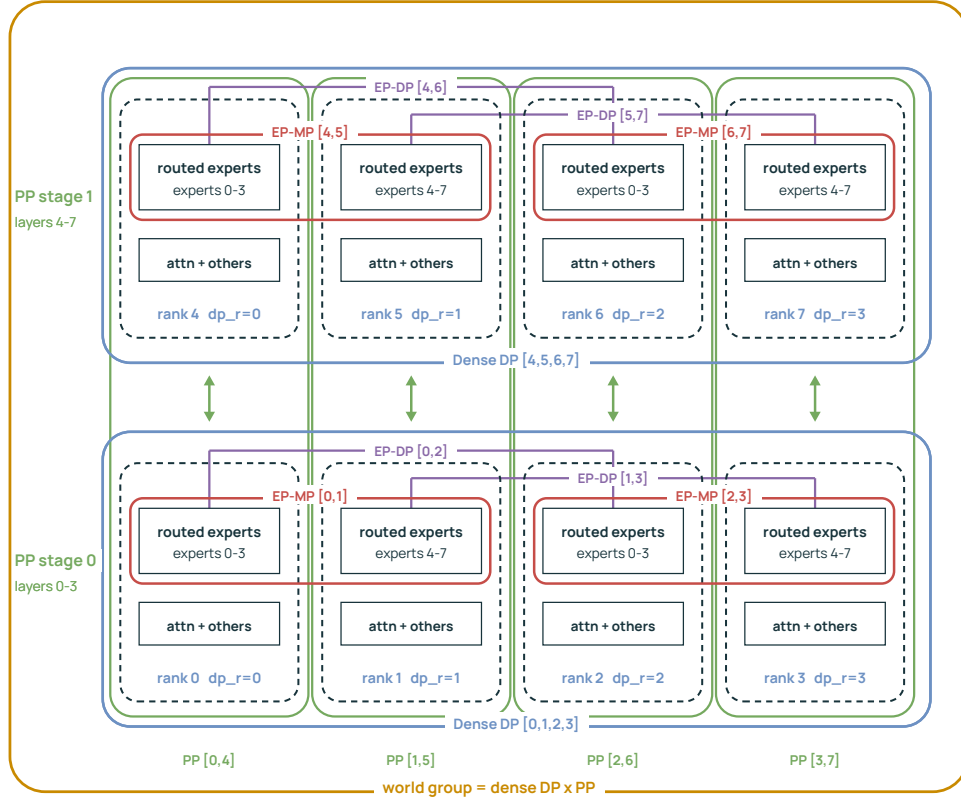


Figure 28 The same ranks participate in several logical topologies. This illustrative eight-rank example uses $PP = 2$, $DP = 4$, $EP-MP = 2$, and $EP-DP = 2$. Each PP stage stores one layer range; EP-MP pairs form a complete expert set; EP-DP pairs connect replicas of an expert shard; and PP groups join matching data-parallel coordinates across stages. Context parallelism is omitted. The diagram establishes group membership, not the hardware path or a measured production placement.

7.2 GPUDirect RDMA Moves Payload; IBGDA Submits Work

Payload movement and work submission have separate costs. Inside one NVL8 node, a GPU reaches peer GPU memory through the NVLink/NVSwitch fabric. Across nodes the path is longer:

GPU memory $\rightarrow$ PCIe $\rightarrow$ local HCA $\rightarrow$ InfiniBand $\rightarrow$ remote HCA $\rightarrow$ PCIe $\rightarrow$ remote GPU memory.

The host channel adapter (HCA) is InfiniBand’s name for the network adapter—the NIC of Section 5.8—and it connects to the GPU through PCIe, which is why PCIe appears at both ends of every cross-node transfer. The nominal fabric rate is only one limit: GPU–HCA locality, shared PCIe bridges, rail selection (which of the node’s per-GPU adapters carries the transfer, Section 7.4), message size, and concurrent traffic can each become the limiting segment. The chain above is conceptual, since NCCL or NVSHMEM may select another local adapter or relay path, and only runtime diagnostics establish the route actually used.

GPUDirect RDMA lets an HCA read and write GPU memory directly, removing a host-memory bounce buffer from the payload path (NVIDIA, 2026a); a host thread or proxy may still be the one preparing the work. **InfiniBand GPUDirect Async (IBGDA)**, as used by NVSHMEM, can move that preparation onto the GPU for one-sided operations (NVIDIA, 2026t; Markthub et al., 2022). Symmetric memory (Section 5.5) already makes remote expert rows addressable; the GPU-driven IBGDA path lets the rowwise EP kernel submit the inter-node transfer itself, with no CPU proxy preparing the work.

The two mechanisms are independent: a direct payload path removes staging copies, and GPU-side submission removes a host dependency from the critical path. Both still require completion ordering and memory

registration, and rowwise EP transfers also depend on the lifetime rules of the remotely visible symmetric buffers. Section 8.4 follows the host-synchronization consequence in detail.

7.3 Communication Clock Determines Placement Priority

Table 11 combines what moves with when it moves. A single DDP collective can carry more bytes than a single EP dispatch, but it runs once per optimizer step and several accumulation microbatches share its cost. EP and PP communication recurs inside every microbatch, and full-reshard FSDP repeats parameter materialization at every wrapped execution boundary. Placement must account for this frequency and critical-path sensitivity as well as byte count.

Axis	Traffic and clock	Placement consequence
DDP / optimizer	Parameter-sized gradient and updated-parameter buckets, once per optimizer step	Bandwidth and rail balance matter; accumulation microbatches amortize this boundary cost.
Full-reshard FSDP	Parameter shards materialized into full wrapped weights, around each wrapped microbatch execution	Repetition makes remote placement costly even when each collective is regular.
EP-MP	Routed token rows and returned expert outputs, at every routed layer in forward and backward for every microbatch	Fast locality, low latency, route balance, and small-message behavior all matter.
PP	Hidden activations and their gradients, at every remote stage boundary for every microbatch	Physical adjacency and independent-work windows determine the exposed P2P cost.

Table 11 Placement pressure follows both payload and recurrence clock. The table describes cost structure, not a universal placement ranking. Actual priorities depend on message shape, degree, model balance, transport, and the measured hardware path.

The axes also use different communication libraries. Dense DDP and EP-DP reduction use NCCL collectives; PP uses NCCL point-to-point communication; block all-to-all EP uses an NCCL all-to-all collective; and the rowwise EP-MP path uses NVSHMEM symmetric memory, because it benefits from indexed one-sided movement among the ranks of an EP-MP group.

7.4 The Tested System Has Eight GPUs per NVLink Domain

The audited cluster used for the main training experiments has eight NVIDIA B300 SXM6 GPUs per node in a single NVLink domain, with every GPU pair reported as NV18 (eighteen NVLink links per GPU). Each node reaches the fabric over eight active 800-Gb/s-class XDR InfiniBand rails, one aligned to each GPU across a shared PCIe bridge (PXB) (NVIDIA, 2026b,i). This is an NVL8 system: any parallel group wider than eight leaves the NVLink domain and crosses the fabric.

These specifications describe hardware capabilities, not achieved bandwidth. “One local rail per GPU” describes a favorable GPU–HCA pairing in the physical topology; which rail a given NCCL or NVSHMEM transfer actually used is a separate question. Enabling an IBGDA environment option is likewise a request rather than evidence that the effective handler mode was fully GPU-side. The rail and IBGDA statements in this report therefore describe the configured paths, taken from the audited inventory and requested configuration rather than per-transfer counters.

The distinction matters most when comparing training systems. An NVL72 domain keeps much larger model-parallel groups on NVLink, so results measured there and our NVL8 measurements are not an apples-to-apples topology comparison. The comparison can also run the other way: the unusually well-provisioned XDR fabric on these nodes can flatter an inter-node method that would fare worse on a cluster with fewer or slower rails. Comparing systems therefore requires the end-to-end path available to each rank group, not just the GPU and fabric names.

7.5 Topology Changes the Operating Point

Increasing EP-MP degree from eight to sixteen halves each rank’s expert shard, but also moves EP from an intra-node NVLink exchange to an inter-node operation, and it can change which backend is worth using: many small row transfers can become limited by the HCA’s message rate, favoring the block-oriented DeepEP v2 backend (Section 5.8). Where the crossover falls is an empirical property of model shape and fabric rather than a universal degree threshold.

Adding accumulation microbatches spreads DDP gradient and optimizer-boundary traffic across more useful token work, while EP dispatch/combine and PP activation traffic recur for every microbatch regardless. One batch-size change can therefore relieve one communication axis and, at the same time, make another communicate more often.

Separate communicators or CUDA streams still use the same hardware. Concurrent communication and GEMM can still contend for SM scheduling, cache, memory bandwidth, PCIe, HCAs, and fabric links. Section 5.9 shows this directly in one two-node EP-MP = 16 diagnostic, where concurrent rowwise communication slowed the grouped expert work by roughly 23–27% on the tested shape. The magnitude is specific to that shape. As Section 5.9 shows, the benefit of hidden communication must be evaluated together with the slowdown of concurrent kernels.

Parallelism defines which values communicate and how often; mesh dimension order and launcher rank order turn those logical groups into physical paths. Our placement gives frequent, latency-sensitive traffic priority within the NVLink domain, subject to the launcher producing the intended mapping. Changing degree, batching, backend, or overlap policy can change the limiting resource, so their combined effect is specific to each model and hardware configuration.

Part III

Efficient Training

8 Synchronization-Free Training

The GPU executes each training step, but the CPU prepares and submits nearly all of that work. A CUDA kernel launch normally returns without waiting for the kernel to finish, allowing the CPU to submit later operations while the GPU executes earlier ones (NVIDIA, 2026k; PyTorch Contributors, 2026f). This asynchronous execution is essential for high utilization: the GPU should find its next operation already waiting when the current operation finishes. The GPU can run out of queued work if the CPU submits operations too slowly or blocks while waiting for a device-produced value (Figure 29). Slow submission calls for less host work or more device work per launch. A device-to-host wait instead calls for an interface that keeps device results off the host’s steady-state path; initialization, compilation and warmup, and buffer allocation may still synchronize.

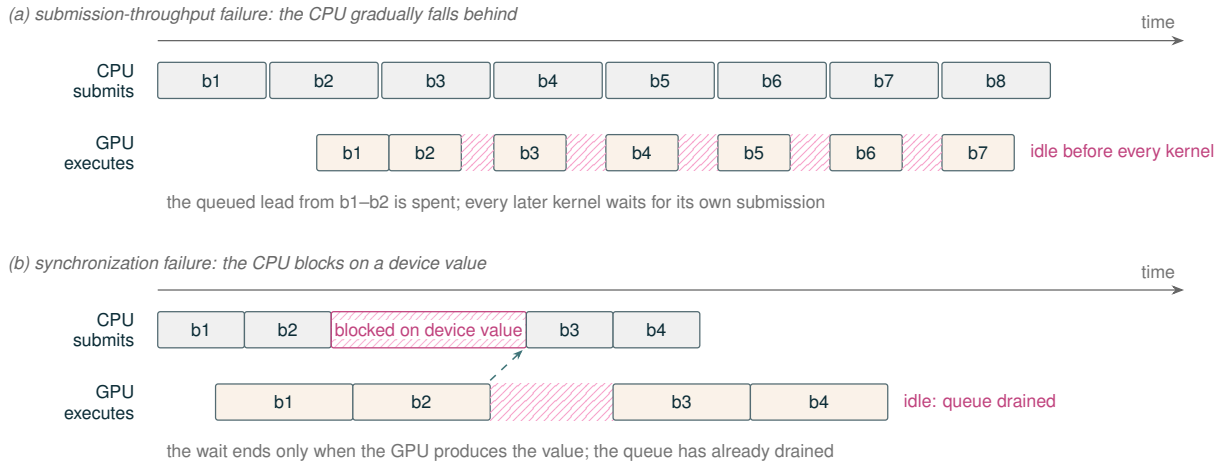


Figure 29 GPU idle intervals caused by slow submission and host waits. (a) When submitting a block costs the CPU more time than executing it costs the GPU, the queued lead is spent and every later kernel waits for its own submission; the GPU idles a little before every block. (b) When the CPU blocks on a device value, submission stops entirely: the GPU finishes the queued work, sits idle until the value is produced and the host resumes, and the host must then rebuild its lead. Conceptual illustration with no measured quantities.

MoE training is especially sensitive to both problems. Routing introduces many short metadata operations around the expert GEMMs, and the number of tokens assigned to each rank and expert is data dependent. A direct implementation may therefore combine small GPU work units with host-visible counts, variable allocations, and variable communication schedules. These costs are part of the systems tax introduced in Section 1.3; they are not counted by the model-FLOP estimate.

In this section, **synchronization-free** has a narrow meaning: the steady-state training path contains no avoidable host-blocking synchronization for routing, allocation, communication, or expert scheduling. It does not mean that execution has no ordering. CUDA stream dependencies, collective completion, autograd dependencies, and optimizer-step boundaries are still required. In the MoE path examined here, the all-to-all and grouped GEMM required host-visible counts. Section 8.5 describes how Olmo removes both waits without introducing a new one.

8.1 The CPU Must Stay Ahead of the GPU

Consider a repeated region such as one transformer block. Let T_{submit} be the CPU time required to submit the region and T_{device} be the time required by its GPU work. If $T_{\text{submit}} < T_{\text{device}}$, the CPU can usually move ahead while the GPU executes. If $T_{\text{submit}} \geq T_{\text{device}}$, the GPU eventually reaches the end of the submitted queue and waits for the host. Dependencies and concurrent streams make this comparison a diagnostic, not a complete performance model, but it identifies the relevant imbalance.

We call the amount of submitted but not-yet-completed GPU work the **submission headroom**. Headroom is a function of wall-clock time: it jumps up by a kernel’s device duration when the CPU completes that kernel’s submission, drains at unit rate while the GPU executes, and the GPU is idle exactly while it is zero. Large GEMMs, scaled dot-product attention, fused kernels, compiled regions, and C++ execution can build headroom because they submit substantial device work with relatively little host work. Python call stacks, dispatcher and compilation-cache lookups, metadata bookkeeping, and many short launches consume it. Submission headroom is an interpretation of a CPU/GPU timeline, not a CUDA metric: the CPU’s lead over GPU execution shrinks to zero when the device runs out of queued work. Figure 30a draws headroom as this quantity, and Table 12 summarizes which common operations build or consume it. Figure 31 then contrasts a dense block sequence that sustains that lead with a routed one in which a per-block synchronization point removes it.

Backward passes usually rebuild headroom. A layer’s backward launches roughly twice the GPU work of its forward—the input-gradient and weight-gradient GEMMs (Dgrad and Wgrad, Section 9)—while the autograd engine submits that work with less per-launch overhead than the Python-driven forward. The lead earned during one microbatch’s backward then carries into the next microbatch: the first forward blocks can still run with positive headroom, while each submission-bound block spends part of the lead and leaves less for the blocks behind it. Figure 30b shows this drain-and-rebuild cycle within one microbatch.

Operations	Effect	Why
Large dense and grouped GEMMs	Builds	Much device work per launch
Scaled dot-product attention	Builds	Same
Fused kernels and compiled regions	Builds	Many operations submitted as one launch
Autograd-engine backward	Builds	Roughly twice forward’s device work, submitted from C++ with low per-launch overhead
Python call stacks and dispatcher overhead	Consumes	Host time passes while little or no device work is queued
Compilation-cache lookups and metadata bookkeeping	Consumes	Same
Routing metadata and other short kernels	Consumes	Little device work per launch
Device-to-host synchronization	Stops submission	The host blocks until the device produces the value; the queue drains and the lead must be rebuilt (Section 8.4)

Table 12 Common operations build, consume, or stop submission headroom. The classification is the interpretive lens of Figure 30, not a CUDA metric; whether a specific timeline stays healthy depends on the mixture and on stream dependencies.

The distance between an API launch on the CPU and the corresponding GPU start is useful, but it must be interpreted with stream dependencies. A long distance can mean that useful work is already queued, or that the operation is waiting on another stream. The decisive observation is whether the GPU has runnable work when the preceding operation completes. GPU utilization and power are too coarse to establish this cause by themselves.

Captured profiles of the eight-layer development model show both timeline shapes, one per expert-parallel path (Figure 74 in Appendix B.5). In the synchronized trace, a host wait inside every routed block keeps the CPU and GPU spans of each forward block aligned, and the kernel rows show idle gaps at the block

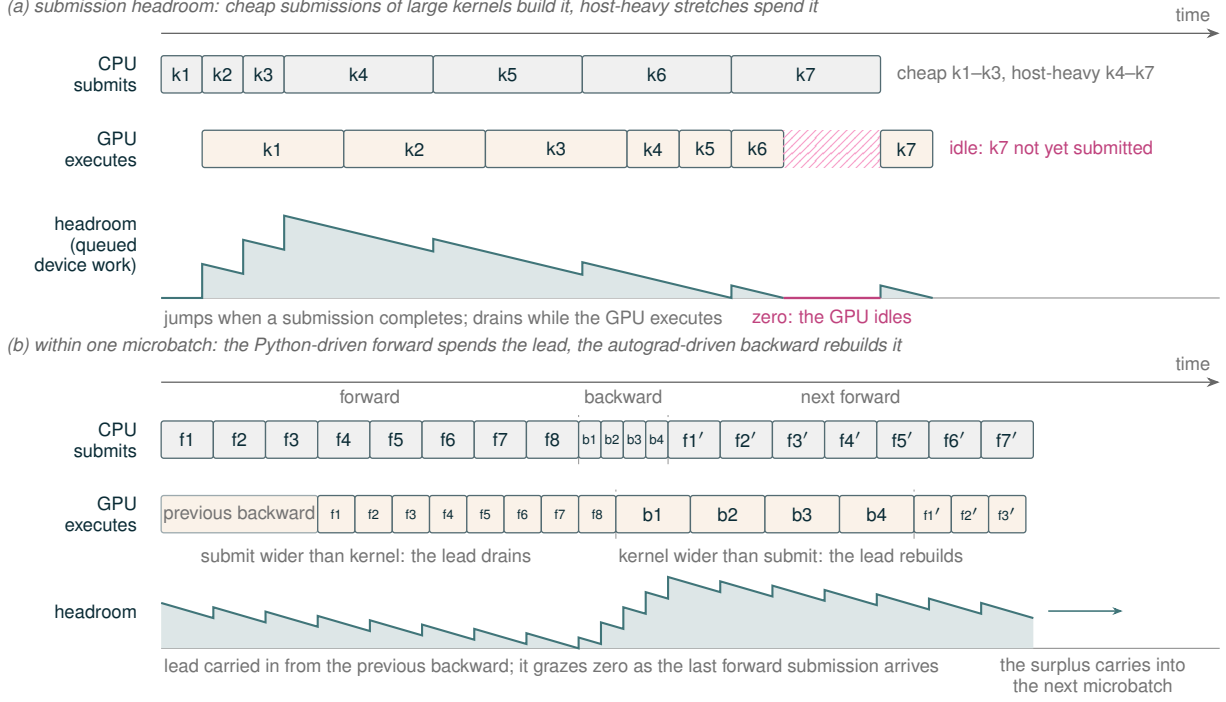


Figure 30 Submission headroom is the queued, not-yet-executed device work. Both curves are computed exactly from the drawn boxes: headroom jumps up by a kernel’s device duration when the CPU completes that kernel’s submission and drains at unit rate while the GPU executes, so the GPU is idle exactly where the curve sits at zero. (a) Cheap submissions of large kernels (k1–k3) build the lead; a host-heavy stretch of small kernels (k4–k7) spends it faster than it is replaced, and after the lead reaches zero the GPU waits for k7’s submission. (b) Within one microbatch, each Python-driven forward submission costs the CPU more time than its kernel costs the GPU, so the lead carried in from the previous backward drains layer by layer and grazes zero just as the last forward submission arrives. The autograd-driven backward inverts the imbalance, and while the GPU executes it, the CPU is already submitting the next microbatch’s forward: the rebuilt surplus is the lead that forward will spend. Each CPU box’s width is the full host cost of its submission, including Python and dispatcher time. Conceptual illustration with no measured quantities.

boundaries. In the rowwise trace, the CPU submits an entire microbatch while the GPU is still executing earlier work, and the GPU then executes the submitted blocks back to back.

8.2 Small Work Units Expose Submission Overhead

For a fixed operator sequence, a simple host-time approximation is

$$T_{\text{submit}} \approx N_{\text{launch}} t_{\text{launch}} + T_{\text{framework}} + T_{\text{bookkeeping}}, \quad (11)$$

whereas the GPU time of its GEMMs and attention generally grows with the number of tokens. Reducing the microbatch can therefore shorten device execution without reducing host work in proportion. This is one reason that a kernel-level speedup may disappear when the same kernels are invoked through an eager training stack.

Routed blocks add host submission work to the transformer operations shared with a dense model: each block constructs routing metadata, counts expert assignments, attaches router losses, permutes or maps rows, launches expert communication, and schedules grouped GEMMs. Expert parallelism can also divide the local tokens among many experts, making each GEMM shorter. The resulting sequence of short GPU operations leaves less time for the CPU to prepare the next group of launches, even when each operation is cheap in isolation.

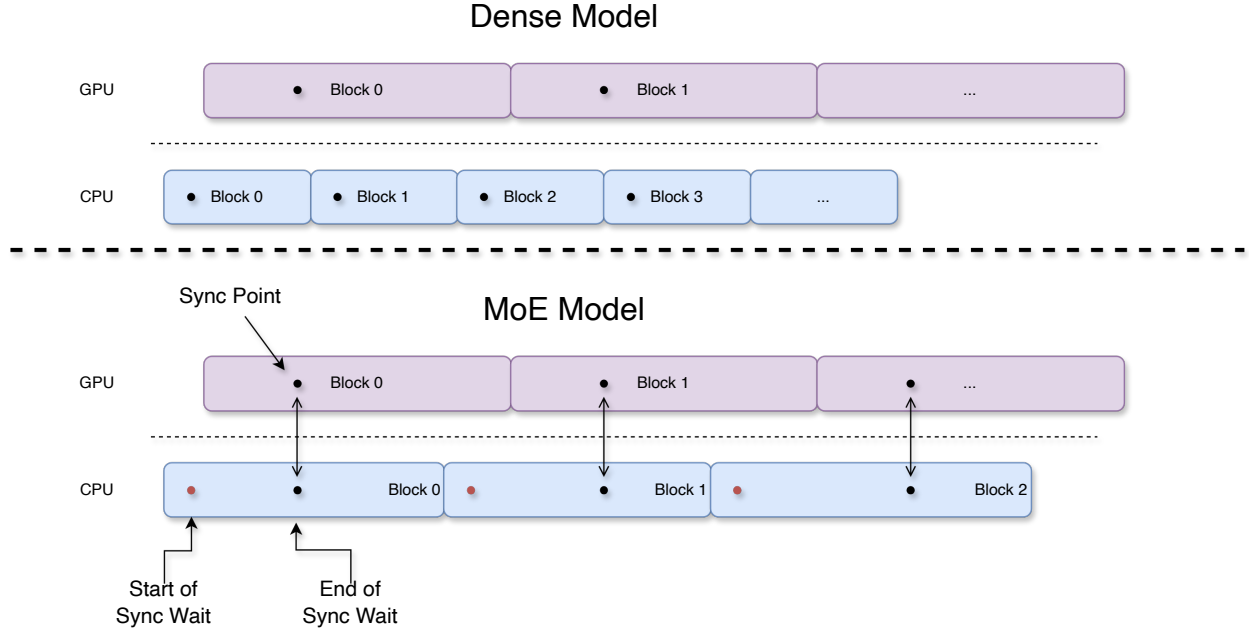


Figure 31 A per-block synchronization point stops the CPU from running ahead. In the dense timeline (top), the CPU submits blocks well in advance of their GPU start times, so several blocks of device work stay queued and the GPU always finds its next operation waiting. In the routed timeline (bottom), every block contains a synchronization point: the CPU begins a sync wait, blocks until the GPU reaches the matching point, and only then submits the remainder of the block. Submission headroom cannot accumulate beyond one block, so the two processors advance in lock step and any GPU stall is exposed. The timeline is conceptual and does not encode measured duration. Section 8.4 examines the synchronizing operations themselves.

The same reasoning applies to very fast normalization, elementwise, and reduction kernels. Their device time can be shorter than the framework and launch path around them. The appropriate remedies are then larger work units, fusion, compilation, or a lower-overhead C++ interface. These remedies reduce ordinary submission cost; they do not remove an explicit device-to-host wait. The balance between submission and execution sets the microbatch-size crossover discussed next.

8.3 Critical Microbatch Size

This host-device balance defines a **systems critical microbatch size**. It is unrelated to the optimization-theoretic critical batch size discussed in Section 16. Let b denote the rank-local amount of work in one microbatch—for example, the number of sequences at fixed sequence length—and compare the CPU submission time $T_{\text{submit}}(b)$ with the corresponding GPU execution time $T_{\text{device}}(b)$. The crossover occurs near

$$T_{\text{device}}(b_{\text{crit}}) \approx T_{\text{submit}}(b_{\text{crit}}). \quad (12)$$

Below this point, the GPU completes the submitted work faster than the CPU can prepare and launch the next work, so the GPU can run out of queued operations and become idle. At or above the crossover, each submitted region contains enough device work for the CPU to stay ahead. This threshold is not a model constant: it depends on the operator mix, fusion and compilation boundaries, software stack, CPU, GPU, and sequence length.

The crossover must be identified from the CPU/GPU profile of the selected configuration. Figure 32 illustrates how it can move; it does not estimate a critical size for a production run.

This trend matters as accelerators improve. Moving from Hopper to Blackwell can shorten the device side of the same operator sequence without reducing Python, dispatcher, routing-bookkeeping, or launch work by the same factor. The crossover can therefore shift to a larger microbatch. A configuration that kept an H100

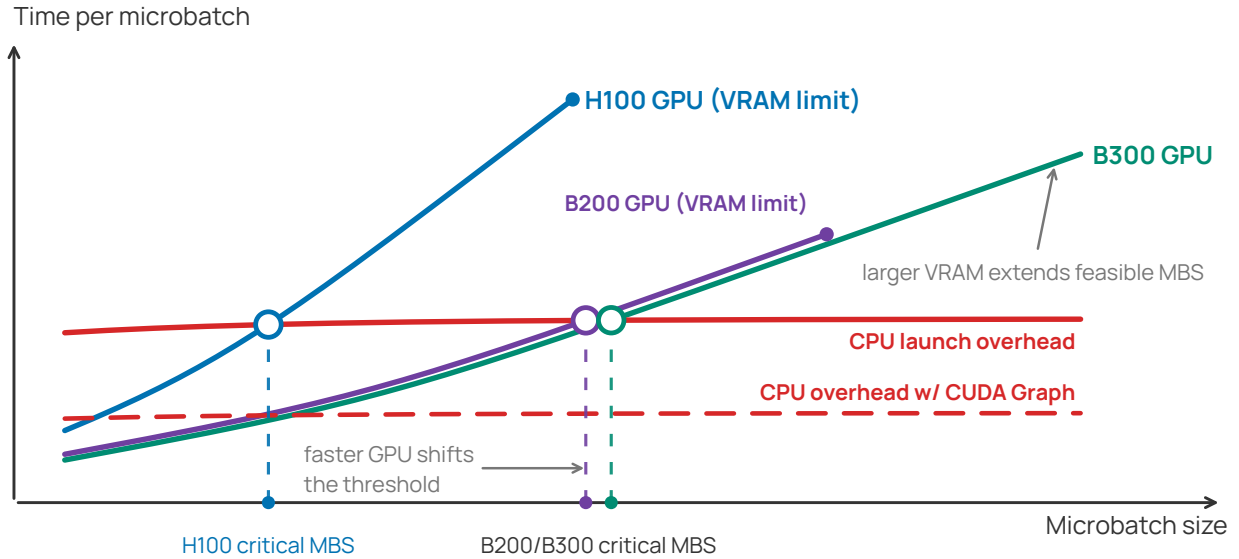


Figure 32 A faster GPU can move the critical microbatch size to the right. The solid red curve represents CPU submission time, while the blue, purple, and green curves represent H100, B200, and B300 execution time. Below a crossover, the device can consume work faster than the host supplies it; faster execution with an unchanged host path therefore requires a larger microbatch to restore submission headroom. Additional GPU memory can extend the feasible microbatch range, while reducing submission overhead (dashed red; CUDA Graph replay is one way to reduce this overhead) can move the crossover to the left. The curves, intersections, and memory limits are qualitative annotations rather than measurements; no numerical critical size is implied.

continuously supplied may become host-submission limited on a faster GPU even though every individual GPU kernel improved.

Memory-saving techniques can keep the GPU supplied by making a larger microbatch feasible: lower-precision activation storage and activation recomputation reduce the per-token memory cost, as discussed in Sections 11 and 13. Cheaper submission instead moves b_{crit} to the left: fusion, compiled regions, and C++ execution reduce repeated host work in the production path, and CUDA Graph replay provides a low-host-overhead reference (NVIDIA, 2026f; PyTorch Contributors, 2026f). Larger microbatches consume more activation memory, while static PyTorch capture/replay imposes address, shape, and buffer-retention constraints; their value depends on whether CPU submission or GPU execution limits the measured step at the selected microbatch size.

8.4 Device-to-Host Synchronization Drains the Queue

A **device-to-host (D2H) synchronization** occurs when host execution cannot continue until a value computed on the GPU is available to the CPU. The CPU stops submitting later work while the GPU completes all dependencies needed to produce that value. The wait consumes submission headroom, but the GPU becomes idle only if it outlasts useful independent work that was already submitted. After the value arrives, the host must rebuild its lead over the device.

Block all-to-all EP (Section 5.3) provides a concrete example. Routing produces the number of tokens sent to each destination on the GPU. In Olmo-core’s synchronized path, ranks exchange token counts on the GPU, then copy the send, receive, and local-expert counts to CPU memory and wait. The send and receive counts become the Python split lists used to launch the data exchange. A fully dynamic receive buffer has the same problem when its allocation shape is derived from device counts. Some legacy grouped-GEMM backends⁹ likewise require host-visible expert sizes, although that dependency can occur without EP. The simplified pseudocode separates the two host dependencies:

⁹In Olmo-core, the legacy grouped-GEMM fallback used before the PyTorch device-offset fast path takes host-side split sizes.

```

peer_sizes_gpu = count_routes_per_peer(routes)
# All-to-all requires host-side split sizes.
peer_sizes = copy_to_cpu_and_wait(peer_sizes_gpu) # host sync
all_to_all(x, split_sizes=peer_sizes)

expert_sizes_gpu = count_routes_per_expert(routes)
# Legacy grouped GEMM also requires host-side expert sizes.
expert_sizes = copy_to_cpu_and_wait(expert_sizes_gpu) # legacy host sync
grouped_gemm(x, expert_sizes)

```

Both waits arise when an interface turns device-produced counts into host inputs. A receive buffer allocated from the current route count creates the same dependency even if the transfer itself accepts device metadata. Section 8.5 follows the changes to communication, allocation, and grouped-GEMM scheduling that keep these counts on the GPU.

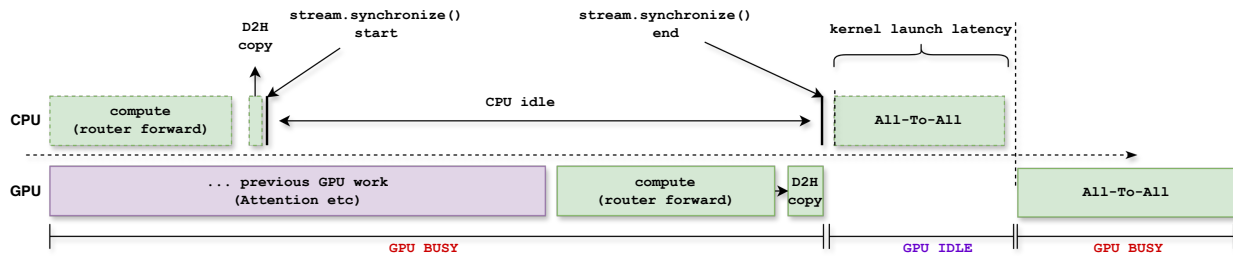


Figure 33 Host-visible split sizes delay the all-to-all launch. The GPU produces route counts, but the synchronized variable-split path must expose them to the CPU before the collective can be launched. If the queue drains at this boundary, the GPU becomes idle until the host receives the counts and submits the all-to-all. The timeline is conceptual and does not encode measured duration.

Independent work submitted before the host wait can occupy some or all of this interval. In Figure 34, shared-expert compute runs while the CPU waits for the route counts. This scheduling hides the GPU bubble but does not remove the synchronization or allow the all-to-all to launch before its split sizes reach the host.

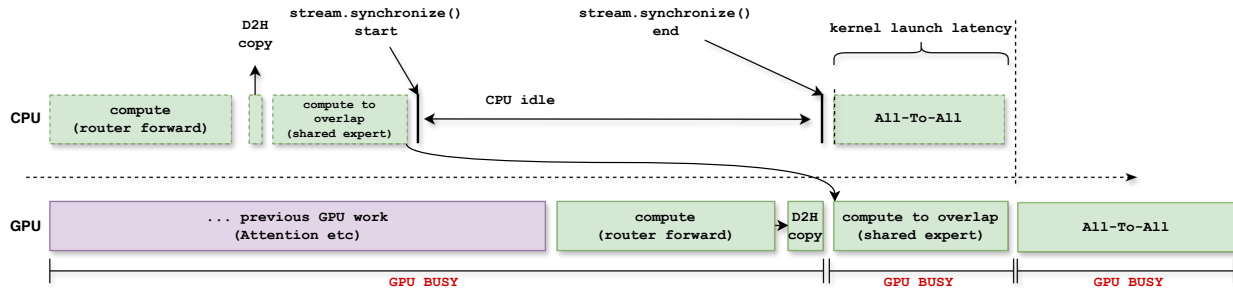


Figure 34 Independent compute can cover a host wait without removing it. The CPU submits shared-expert work before blocking on GPU-produced route counts, so the GPU remains busy while the host waits. The all-to-all still cannot be submitted until the counts are host-visible. This is latency coverage, not communication-compute overlap; the timeline is conceptual and does not encode measured duration.

Dynamic routing itself does not require a host synchronization. The synchronization is introduced by an interface that asks the CPU to interpret a device result. Table 13 separates definite host-visible operations from operations that are often blamed incorrectly.

PyTorch explicitly documents the synchronization behavior of `nonzero()` on CUDA (PyTorch Contributors, 2026k). Scalar extraction and host-visible copies have the same fundamental dependency: Python cannot

Pattern	Host wait	Reason
<code>x.item()</code>	Yes	Materializes a CUDA scalar as a Python value.
<code>x.cpu()</code> followed by host use	Yes	The host-visible copy must wait for the required source data.
<code>torch.nonzero(x)</code> on CUDA	Yes	PyTorch documents a host–device synchronization for this dynamic-output operator.
<code>torch.empty([int(x)])</code>	Yes, before allocation	The conversion of the CUDA scalar to a Python integer synchronizes; <code>empty</code> itself is not the cause.
Device indexing, gather, or scatter	Not inherently	These remain GPU operations when indices, shapes, and results stay on the device.

Table 13 Host synchronization depends on how a GPU result is consumed.

use a value that the device has not produced. This does not imply that every dynamic operator or tensor allocation synchronizes. Whether a hot-path call blocks depends on where its shape and control data reside. CUDA stream events illustrate the distinction between required device ordering and host blocking. A stream can wait on an event while the CPU continues to submit independent work. Calling a host synchronization routine waits on the CPU and therefore changes the submission path. The goal is to retain necessary device ordering without making the host participate in data-dependent scheduling.

8.5 How to Become Synchronization-Free

Device-resident route metadata and device-side grouped-GEMM offsets remove the two count-dependent host waits from Olmo’s rowwise MoE path. Capacity-shaped storage prevents route counts from becoming host allocation decisions. The selected routes remain dynamic; buffer capacities are fixed before the training loop.

The rowwise mechanics are those of Sections 5.4 and 5.7; this subsection isolates their host-facing consequence. Table 14 lists the host dependency removed by each mechanism and its associated cost. The first two rows remove the all-to-all dependency; the third removes the grouped-GEMM dependency. Each removal has a focused illustration: Figures 15 and 16 contrast the synchronized block all-to-all with the rowwise path whose route metadata never leaves the GPU, and Figures 36 and 37 contrast the host-loop grouped GEMM with the device-scheduled interface that consumes offsets where they are produced.

Mechanism	Host dependency removed	Cost accepted
Device-resident route metadata: route maps, counts, and offsets stay CUDA tensors	Python split lists interpreted per microbatch	Metadata kernels in every routed layer
Capacity-shaped buffers with a valid-row prefix	Data-dependent allocation shapes	Reserved capacity memory; possible route drops
Device-side cumulative offsets for grouped GEMM	<code>item()</code> per expert count and a host GEMM loop	Backend must accept device offsets

Table 14 Device-side metadata and fixed-capacity storage remove host dependencies. The mechanisms retain dynamic routing while keeping data-dependent counts and allocation decisions off the host path.

Dynamic Routes, Fixed Buffer Capacities

Keep route counts dynamic on the GPU; fix buffer capacities before the training loop.

Device-resident route metadata. The router produces route maps, destination ranks and rows, per-rank counts, and expert-group offsets as CUDA tensors. The rowwise dispatch and combine kernels consume those

tensors directly (Figure 16). Olmo currently uses NVSHMEM because it supports GPU-initiated one-sided PUT and GET operations over symmetric memory (NVIDIA, 2026t). The host still launches kernels and establishes the communication resources; it does not retrieve a variable split list for each microbatch. Per-rank count exchange, stream waits, and NVSHMEM barriers still provide required device ordering; their route-dependent values remain CUDA tensors and are not consumed by the host. The count exchange is one all-gather over the EP-MP group. This is the rowwise NVSHMEM path analyzed in this section.

Capacity-shaped storage. Dispatch, combine, scale, and metadata buffers are allocated to a configured capacity. A route map identifies which rows are valid in the current microbatch. This separates a static upper bound, which the allocator needs, from the dynamic valid-row count, which remains on the device. The distinction matters because unwritten capacity rows may contain stale data; expert compute and combine therefore consume only the rows marked valid for the current microbatch.

Device-side grouped-GEMM scheduling. Current Olmo expert compute uses a grouped-GEMM interface with a CUDA `int32` cumulative-offset tensor (Figure 37). The backend, rather than a Python loop, identifies the row range assigned to each local expert. This removes the need to call `item()` on each expert count and also reduces the number of GEMM launches. A CPU-loop implementation would instead copy offsets to the host and serialize group launches, recreating the synchronization and launch gaps that the device-offset interface removes.

Capacity trades memory for the removed stall. A fixed envelope can reserve more memory than the valid routes require and can drop routes if the configured capacity is exceeded. Current grouped GEMMs use device offsets and stop at the valid expert rows (Section 9), but capacity tails still occupy buffer memory and can be touched by non-GEMM elementwise work; a tail-aware SwiGLU kernel that applies the activation only to the valid prefix avoids touching the tails on forward-only paths. Other implementations may also communicate padded rows. Useful-token FLOPs must exclude those rows, while physical memory, transferred bytes, and executed kernel work must include them. Capacity overhead is therefore the cost of removing the host synchronization.

Reducing remaining submission overhead. Fusion, compiled regions, and C++ execution reduce the number and cost of ordinary launches after dynamic metadata has been kept on the device. These techniques solve a different problem from D2H synchronization. A faster Python or C++ call stack cannot repair an API that fundamentally requires a GPU value in Python. In the current implementation, the custom symmetric-memory transport remains a deliberate C++/CUDA boundary of the compiled block; compilation reduces surrounding work but does not capture the complete rowwise path as one graph.

CUDA Graph replay could remove much of this remaining submission cost, but its stable-address and fixed-shape requirements conflict with live pipeline microbatches, and the production path is not graph captured. Section 15.6 analyzes that trade and uses replay only as a diagnostic ceiling that separates device service time from eager submission cost.

Host-wait behavior depends on the running configuration. Appendix B.6 records the verification checklist and a graph-replay microbenchmark that isolates the submission tax on short expert operations. In the captured rowwise timeline of Appendix B.5, no host wait interrupts submission for the eight-layer BF16 EP8 development model with a shared expert. This is a single-rank captured instance of the mechanism, not a guarantee for every configuration or execution phase; initialization, compilation, warmup, and buffer allocation remain outside the steady-state scope.

Capacity memory and padding remain costs of this design. Once the count-dependent waits are removed, ordinary submission overhead still determines whether the CPU can keep the GPU supplied.

9 Grouped GEMM

Routing turns one expert layer into a ragged batch of matrix multiplications. After dispatch, each rank holds token rows ordered by local expert and a device tensor containing the number of rows assigned to every expert.

Grouped general matrix multiplication (grouped GEMM) executes these unequal row counts without padding every expert to the hottest load. A device-scheduled implementation also avoids returning the counts to the CPU.

9.1 Routing Creates Uneven GEMMs

Let M_e be the number of rows assigned to local expert e , d the model dimension, and h the expert intermediate dimension. A SwiGLU expert applies

$$\begin{aligned} U_e &= X_e W_{\text{ug},e}^T, & X_e &\in \mathbb{R}^{M_e \times d}, & W_{\text{ug},e} &\in \mathbb{R}^{2h \times d}, \\ Y_e &= \text{SwiGLU}(U_e) W_{\text{down},e}, & Y_e &\in \mathbb{R}^{M_e \times d}, & W_{\text{down},e} &\in \mathbb{R}^{h \times d}. \end{aligned} \quad (13)$$

Within one routed layer, every expert has the same weight shapes; routing changes only M_e . The rank therefore receives $M = \sum_e M_e$ useful rows but must execute a collection of GEMMs whose first dimension varies by expert. A single dense GEMM cannot select a different weight matrix for each segment, while launching every expert independently creates a long sequence of small operations.

9.2 Padding, Host Scheduling, and Device Scheduling

Figures 35, 36, and 37 compare three ways to execute the same expert projections. They differ in whether they pad the ragged row dimension, make its sizes visible to the host, or schedule the variable-size problems directly from device metadata.

Padded BMM. The simplest strategy pads every expert to a common capacity C and forms an $N_{\text{local}} \times C \times d$ activation tensor. **Batched matrix multiplication (BMM)** then launches one regular operation, but it executes $N_{\text{local}}C$ rows even though only M rows contain routes. Its padding fraction is

$$\rho_{\text{pad}} = 1 - \frac{\sum_e M_e}{N_{\text{local}}C}. \quad (14)$$

The cost rises with reserved capacity and, once experts overflow their reserved rows, with load imbalance. Empty rows consume the same matrix-multiply work as routed rows.

Host-scheduled variable GEMMs. An exact-size alternative makes $(M_1, \dots, M_{N_{\text{local}}})$ visible to the CPU and launches the corresponding GEMMs from a host loop. This avoids padded arithmetic, but it introduces a device-to-host dependency before expert compute can be submitted and replaces one grouped launch with a sequence of smaller launches.

Device-scheduled grouped GEMM. A device-scheduled backend keeps the cumulative expert offsets on the GPU. A GPU preparation kernel derives the per-expert pointers, strides, and matrix dimensions; one CUTLASS grouped kernel then schedules tiles across that problem list (NVIDIA, 2026m). The current Olmo BF16 path reaches this mechanism through PyTorch grouped matrix multiplication on its CUDA fast path. MegaBlocks instead expresses expert compute as block-sparse matrix multiplication over a block-compressed layout. This avoids padding every expert to a common capacity, although its published implementation still pads each expert batch to a multiple of 128 rows for block alignment. It is a related, but distinct, execution strategy (Gale et al., 2023).

9.3 Device-Side Offsets Avoid a Host Synchronization

The route histogram is produced on the GPU. If a GEMM interface requires a Python list or CPU tensor of split sizes, the CPU must wait for that histogram before it can submit the expert work. As Section 8.4 explains, this device-to-host dependency drains the queued GPU work and can expose a submission bubble after the synchronization.

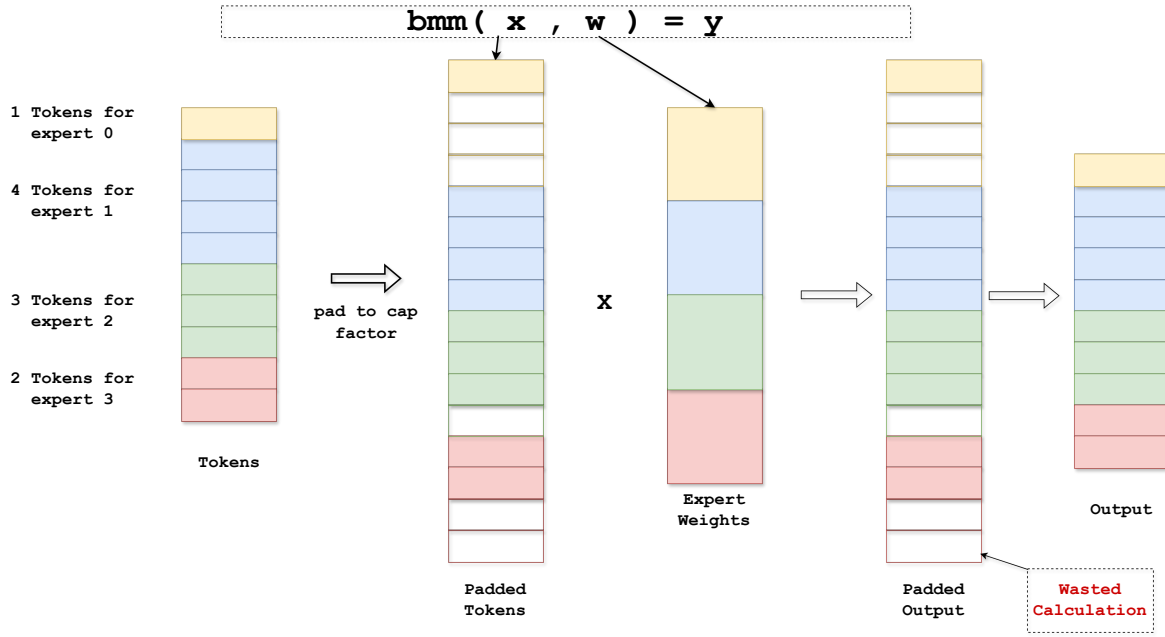


Figure 35 Padded BMM regularizes the ragged row dimension. Every expert is padded to capacity C , enabling one regular batched operation. Empty rows nevertheless consume matrix-multiply work, and their outputs are discarded. Expert weight shapes are fixed; only routed row counts differ.

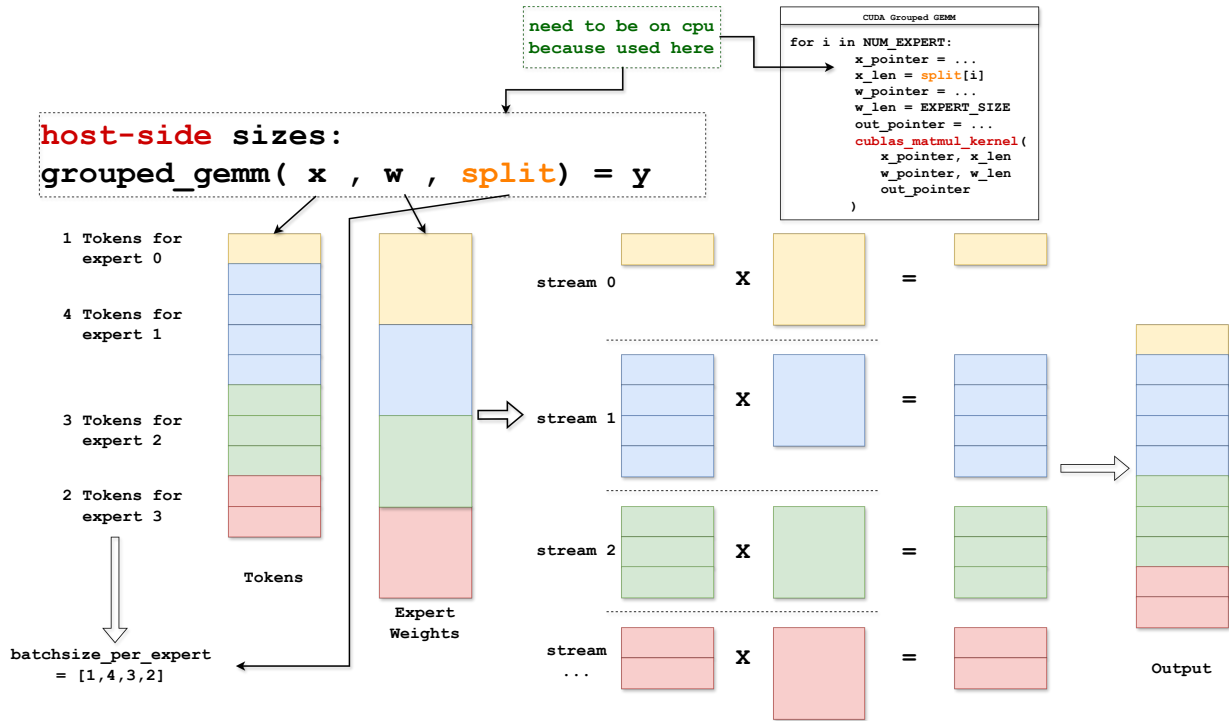


Figure 36 A host loop executes exact-size expert GEMMs. It avoids padded arithmetic, but GPU-produced row counts must become host-visible before the runtime can submit the per-expert operations. The separate streams in this conceptual drawing are not required by the method; the legacy Olmo fallback submits its GEMMs on the current stream.

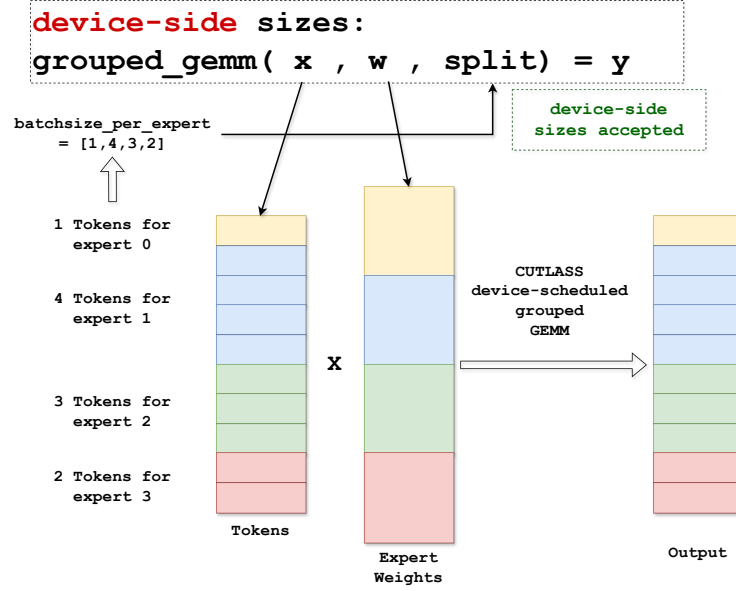


Figure 37 Device-scheduled grouped GEMM executes exact row segments without a host round trip. Device row counts are converted to cumulative offsets. GPU-side preparation then forms the grouped problem list before CUTLASS schedules the compute. The physical buffers retain fixed shapes while the offsets restrict work to the rows assigned to each expert.

Olmo instead computes cumulative expert offsets on the device and passes them to grouped matrix multiplication. The preparation and scheduling kernels can therefore be queued without the CPU interpreting any route count. The selected backend must support device offsets. A fallback that copies them to the CPU recreates the synchronization even when the call site still says `grouped_mm`. Appendix A.6 records the architecture-specific availability of the current device-offset fast path.

9.4 Padded Shape, Unpadded Compute

Static physical shapes are a central advantage of the rowwise path (Section 5.4). Rowwise EP reserves capacity-shaped communication buffers, so their addresses and dimensions do not change with every routing decision. The device offsets separately describe the variable amount of work for each expert. Dispatch writes the received routes directly into expert-contiguous segments, and the cumulative offsets are computed from the real M_e values. The grouped GEMM consumes only those segments; unused capacity remains outside the final offset. Changing route counts therefore does not require new allocations or new tensor shapes at the compiled boundary, yet the unused tails are not executed.

This layout also removes a local permutation between communication and expert compute. The up/gate projection reads the dispatch buffer directly, and the down projection can write directly into the buffer consumed by combine—the direct-access pattern of Figure 20b. In backward, the buffer-aware grouped GEMM wrapper can write the input gradient back into the designated dispatch-gradient storage. Thus, the rowwise path combines fixed-shape allocation with unpadded compute and avoids an additional pack-unpack pair at the grouped-GEMM boundary. Appendix A documents the explicit output-buffer interfaces.

9.5 Forward, Dgrad, and Wgrad Are Different Problems

For a grouped linear projection $Y_e = X_e W_e$, let $X_e \in \mathbb{R}^{M_e \times d_{\text{in}}}$ and $W_e \in \mathbb{R}^{d_{\text{in}} \times d_{\text{out}}}$. Backward requires the input gradient (**Dgrad**) and the weight gradient (**Wgrad**):

$$\nabla X_e = \nabla Y_e W_e^T, \quad \nabla W_e = X_e^T \nabla Y_e. \quad (15)$$

Phase	Left operand	Right operand	Contract	Result	Role of M_e
Forward	$X_e [M_e \times d_{\text{in}}]$	$W_e [d_{\text{in}} \times d_{\text{out}}]$	d_{in}	$Y_e [M_e \times d_{\text{out}}]$	Output rows
Dgrad	$\nabla Y_e [M_e \times d_{\text{out}}]$	$W_e^T [d_{\text{out}} \times d_{\text{in}}]$	d_{out}	$\nabla X_e [M_e \times d_{\text{in}}]$	Output rows
Wgrad	$X_e^T [d_{\text{in}} \times M_e]$	$\nabla Y_e [M_e \times d_{\text{out}}]$	M_e	$\nabla W_e [d_{\text{in}} \times d_{\text{out}}]$	Contraction length

Table 15 The route-dependent dimension changes roles during training. Forward and input-gradient computation (Dgrad) place M_e in the output-row dimension. Weight-gradient computation (Wgrad) contracts over M_e . Implementations may evaluate a transpose-equivalent Wgrad to satisfy operand-layout constraints.

The algebra is the same as for a dense linear layer. The difference is that a dense layer has one common token dimension, whereas a routed layer has a different M_e for every expert (Table 15). Forward and Dgrad therefore contain different numbers of output rows per expert, while Wgrad contains different contraction lengths. For the up/gate projection, $(d_{\text{in}}, d_{\text{out}}) = (d, 2h)$; for the down projection, it is (h, d) . These differences change operand layout, tile geometry, and output buffer opportunities. A forward-only kernel result therefore cannot predict the complete training benefit.

Precision makes the distinction sharper. Olmo’s routed MXFP8 path uses scaled grouped GEMM for forward and Dgrad, while its current Wgrad path uses BF16 grouped GEMM after reconstructing the required operands. Section 11.3 explains why the natural MXFP8 Wgrad contraction is not simply another copy of the forward operation.

9.6 Rows per Expert Determine the Throughput Crossover

Grouped scheduling removes per-expert host launches and avoids BMM’s padded rows, but it does not turn many small expert matrices into one large dense matrix. Its useful geometry is set by the vector $(M_1, \dots, M_{N_{\text{local}}})$, not only by the sum M . The mean $\overline{M} = M/N_{\text{local}}$ indicates how much work is available per expert, while the spread of the M_e values determines BMM padding and how evenly the grouped scheduler can distribute tiles. Small M_e also means less weight reuse, which can make memory bandwidth the limit even before scheduling overhead. Appendix A.8 derives this idealized bound; the comparisons below measure actual kernel performance.

We measure the costs of fixed capacity and of splitting one projection into expert-sized problems, then vary the expert-load histogram at fixed work. A separate stress diagnostic extends beyond the training range to investigate the decline at large shapes. We omit the host loop from the kernel-speed comparison because CUDA events do not capture the preceding host wait.

The cost of fixed capacity. The legacy BMM path sets its per-expert capacity from the ideal mean load $\overline{M}$ and a capacity factor c . With the eight-row alignment used by Olmo,

$$C = 8 \left\lceil \frac{\lfloor c \overline{M} \rfloor}{8} \right\rceil. \quad (16)$$

For $c = 1.25$, the ideal capacity already contains 25% more rows than useful work, or a 20% padding fraction; eight-row alignment can increase that gap further.¹⁰ This is different from choosing $C = \max_e M_e$ after observing the routes. Grouped GEMM instead uses the real cumulative counts and excludes every unused capacity row.

The crossover sits at a few hundred rows per expert. On one B300 with 16 local experts and $d = h = 4096$, Figure 38 compares one BF16 exact-row grouped expert projection with BMM at $1.25\times$ per-expert capacity while sweeping the total routed-row count M from 64 rows to 128K. BMM executes 25% more rows at every point, but its regular kernel is faster through $M = 4\text{K}$. The crossover lies between $M = 4\text{K}$ and

¹⁰The sweep below uses $C = \lceil 1.25 \overline{M} \rceil$ exactly, isolating the capacity factor itself; the eight-row alignment of Equation 16 would add a second, shape-dependent padding term on top of the factor.

$M = 8K$, corresponding to 256–512 routed rows per expert, and grouped GEMM is faster at every measured point above it, although its advantage remains shape dependent. Avoiding padding is insufficient below the crossover, while at $M = 128K$ BMM takes 28.9% longer, more than its 25% of padded work. The common mid-to-large-model operating range of 16K–96K routed rows per rank, shaded in the figure, lies entirely above the crossover. Smaller models use narrower expert projections and often place more rows on each rank, so their crossover must be measured separately; Appendix Figure 71 repeats the experiment with $d = h = 2048$, representative of that regime, and extends the routed-row sweep to 256K.

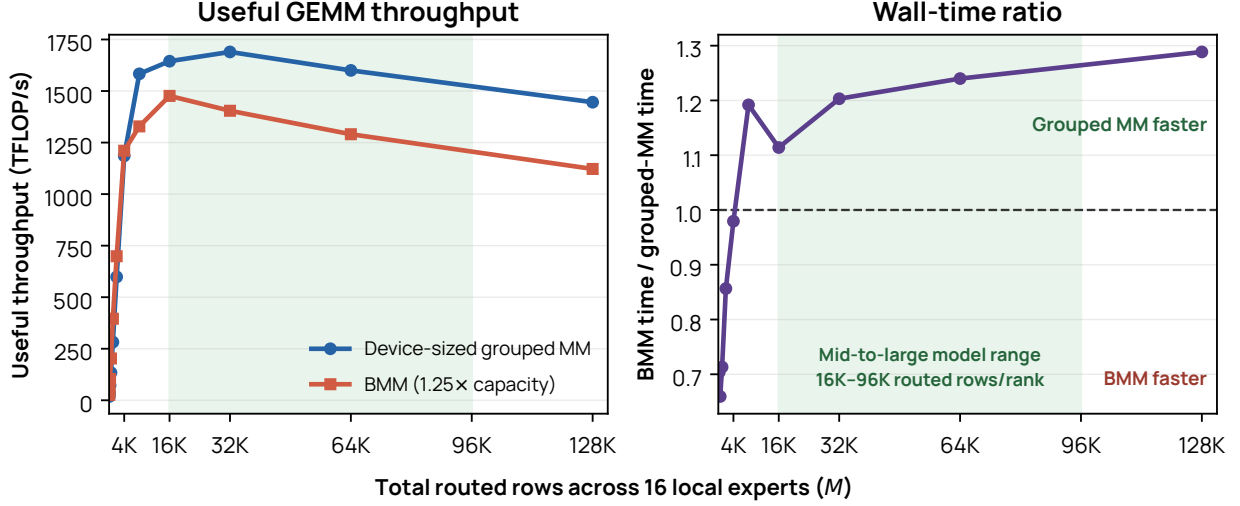


Figure 38 Grouped GEMM and capacity-padded BMM across routed-row counts. Grouped GEMM is faster throughout the shaded mid-to-large-model range. The experiment isolates one BF16 square expert projection on one B300 with $N_{\text{local}} = 16$ and $d = h = 4096$. The horizontal axis is total routed rows across the 16 local experts; routed rows count expert rows, not unique input tokens, since each token contributes one row to each of its top- K experts, and balanced routing gives $M/16$ valid rows per expert. The green band marks the representative 16K–96K rank-local operating range. Its endpoints summarize variation in microbatch and routing choices rather than one fixed microbatch size, sequence length, top- K , or local-expert count; Appendix Table 42 gives concrete configurations. BMM reserves exactly $1.25\times$ capacity per expert, while grouped GEMM executes only valid rows. **Left:** useful throughput counts only valid-row FLOPs. **Right:** values above one indicate that grouped GEMM is faster. Each point is the mean of 20 queued CUDA-event samples after 10 warm-ups; all timed operations are submitted behind one device-side gate and released only after the host has queued the complete batch, so small shapes are not dominated by Python launch gaps.

The cost of decomposing one projection. To isolate decomposition, we begin with one BF16 weight $W_{\text{dense}} \in \mathbb{R}^{8192 \times 81920}$ and partition its output columns into $N \in \{4, 8\}$ expert matrices. For $X \in \mathbb{R}^{T \times 8192}$,

$$W_{\text{dense}} = [W_1 \ W_2 \ \cdots \ W_N], \quad XW_{\text{dense}} = [XW_1 \ XW_2 \ \cdots \ XW_N]. \quad (17)$$

All three layouts therefore execute the same $2T \times 8192 \times 81920$ useful FLOPs, contain the same BF16 weight elements, and produce the same output elements from the exact same BF16 values. The eight-expert case isolates the cost of dividing the same projection into more, narrower GEMMs, including the additional input reads. It is a projection benchmark, not a complete dense-versus-MoE model comparison.¹¹ Splitting a microbatch into waves (Section 5.9) reduces T and lowers GEMM efficiency further, one ingredient of the wave-scheduling result in Section 15.2. The compared paths also use the same seeded operand distribution, since operand values affect throughput (Section 19).

¹¹To ground T : in a balanced EP32, top-4, 128-expert configuration, each rank contributes T input tokens and holds four experts, so each local expert receives T rows. The eight-expert curve is a controlled partition of the same projection, not a second end-to-end routing configuration.

Figure 39 shows the absolute useful throughput of Equation 17. At very small T , decomposing the projection is expensive: both grouped layouts deliver only about 60% of dense throughput through $T = 128$. Both improve sharply at $T = 256$, reaching about 96%, and remain at 94–96% through $T = 4096$. Doubling the number of expert GEMMs while halving their width changes throughput only slightly in this experiment. The larger gap is between either grouped layout and the single dense projection. At still larger T , both grouped layouts drift to 83–88% of dense across $T = 8192$ –65,536, settling at 32K and 64K in the power-limited regime examined below.

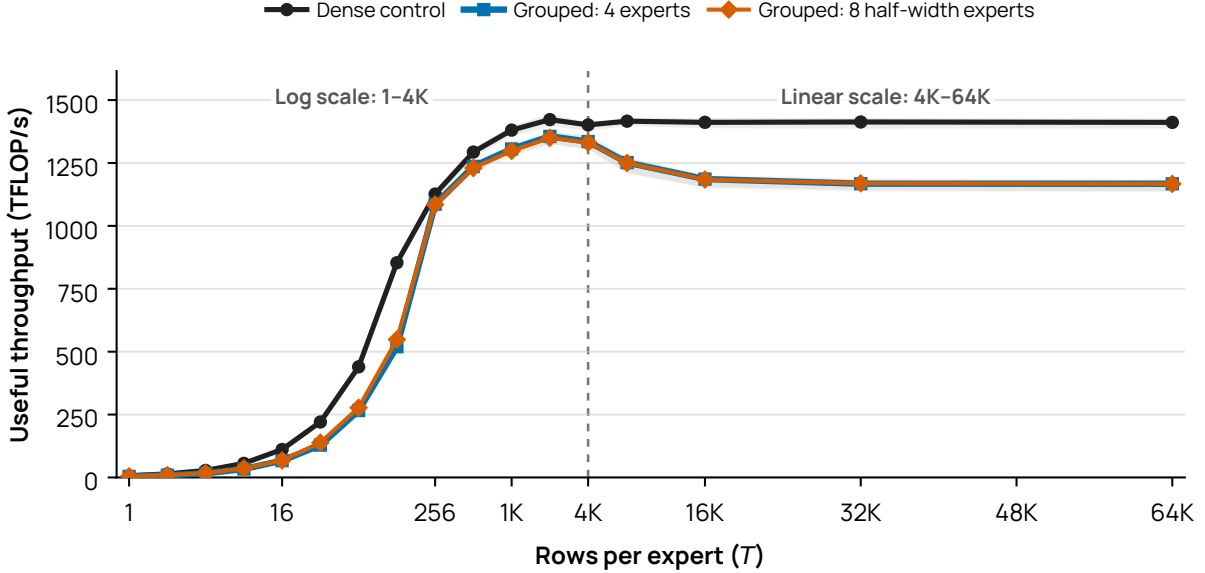


Figure 39 Splitting one projection into four or eight expert GEMMs. The four-expert path executes four $[T, 8192] @ [8192, 20480]$ GEMMs; the eight-expert path executes eight $[T, 8192] @ [8192, 10240]$ GEMMs. Both are exact partitions of the same $[T, 8192] @ [8192, 81920]$ dense projection and therefore match its useful FLOPs, weights, and outputs. Grouped inputs repeat the dense input four or eight times. Curves show means across eight paired trials, one on each of eight B300 GPUs, and light bands show the full eight-GPU ranges; each GPU measures the dense control with both grouped partitions, and its two dense measurements are averaged before the dense curve is summarized. The horizontal axis is logarithmic through $T = 4096$ and linear thereafter; the dashed divider marks the scale change, and no values are omitted. The final two points, $T = 32,768$ and $65,536$, are oversized diagnostics rather than representative training shapes. Only the projection is timed; Appendix A.11 records the complete timing protocol and representative ratios.

Very large grouped GEMMs run at a power-limited clock. The large-shape decline motivates a separate stress diagnostic extending to 32K rows per local expert. Its largest shapes are deliberately oversized diagnostics rather than representative training points. Across that range, grouped GEMM throughput declines together with the SM clock while useful throughput per MHz stays nearly constant. Nsight timelines show the same CUTLASS grouped-GEMM kernel template at $M_e = 2K$ and 32K, and the software power-cap limiter is active in effectively every telemetry sample near the board limit. The equal-FLOP dense control holds nearly flat throughput at a higher clock. Together, these observations indicate a lower power-limited operating point rather than a kernel-selection change or a collapse in per-clock efficiency.

Clocks and power help interpret the extreme-shape decline; operand values also affect throughput (Section 19). Appendix A.12 records the diagnostic protocol and complete curves.

Sensitivity to the load histogram. Even with total rows and arithmetic fixed, the shape of the expert-load histogram changes grouped GEMM time. Let M_e be the rows assigned to local expert e , $M = \sum_e M_e$, and $p_e = M_e/M$. We summarize concentration with the normalized entropy deficit

$$I_H := 1 - \frac{H(\mathbf{p})}{\log N_{\text{local}}} = 1 + \frac{\sum_e p_e \log p_e}{\log N_{\text{local}}}. \quad (18)$$

$I_H = 0$ denotes uniform load and I_H approaches one as the routes concentrate on one expert. Unlike a maximum-to-mean ratio, this metric uses every expert count.

Figure 40 evaluates 100 distinct load histograms spanning the entropy range. Across these fixed-work cases, entropy-defined imbalance has a Spearman correlation of -0.86 with grouped GEMM throughput; a histogram-level bootstrap gives a 95% interval of $[-0.90, -0.80]$. The median normalized throughput falls from approximately 96% in the least-concentrated entropy range to 89% in the most-concentrated range. Individual points are not monotonic: histograms with similar entropy can still present different ordered collections of matrix problems to the kernel. The result supports the systems-level trend—greater route concentration usually lowers grouped GEMM throughput at fixed arithmetic—not the stronger claim that entropy alone determines execution time. Appendix Figure 72 gives a complementary example in which two histograms share the same maximum load but have different throughput.

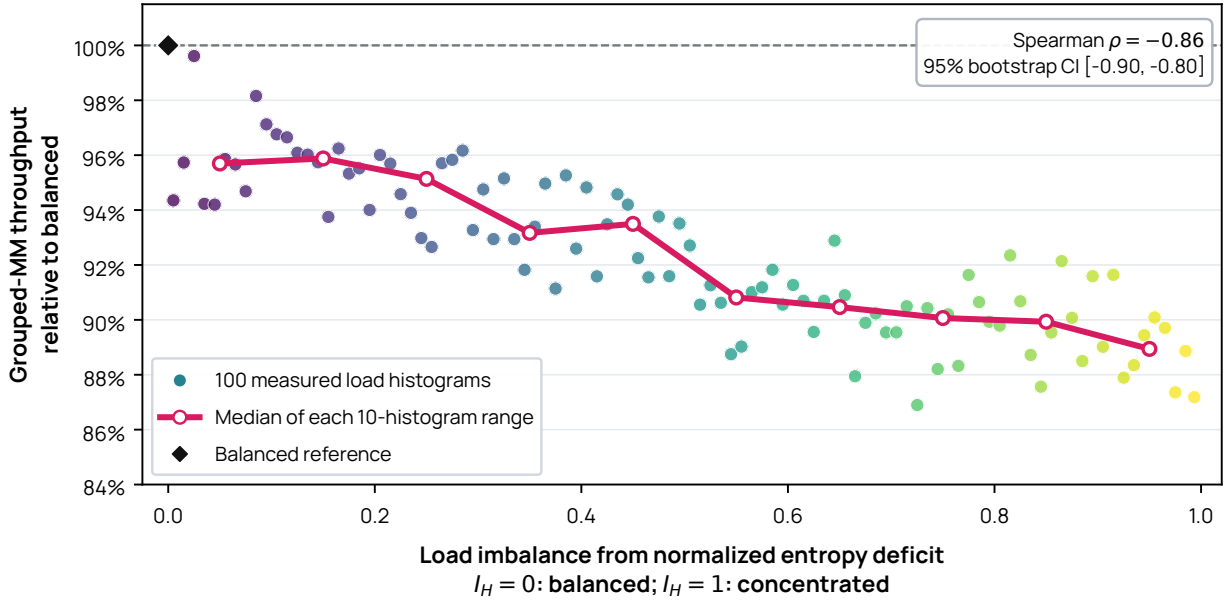


Figure 40 Grouped GEMM throughput generally falls as expert loads concentrate. The experiment isolates one BF16 square expert projection on one B300 with $N_{\text{local}} = 16$, $M = 65,536$ routed rows, and $d = h = 4096$. We draw symmetric-Dirichlet proposals, convert them to exact eight-row-aligned counts with at least one tile per expert, and select ten distinct histograms from each of ten equal-width I_H ranges. Every dot therefore has the same total rows, operands, dimensions, and useful FLOPs. Each dot averages four fixed expert-index permutations in each of three fresh processes. Each of those 12 conditions averages 20 queued CUDA-event samples after 10 warm-ups; execution order is randomized and balanced controls bracket every ten cases. The magenta curve connects the median of each ten-histogram range. The correlation and bootstrap interval are computed over the 100 histogram means. This kernel-only test excludes dispatch, communication, and cross-rank waiting.

Section takeaway. Grouped GEMM executes route-dependent expert shapes without turning reserved capacity into matrix-multiply work; the rowwise layout feeds it directly from fixed-shape buffers, and device offsets restrict computation to real routes. In our B300 sweep, grouped GEMM becomes faster than capacity-padded BMM once enough rows reach each expert. BMM’s regular kernels are faster below the crossover, and concentrated expert loads still reduce throughput above it. Even at exactly matched FLOPs, decomposing one dense GEMM into expert-sized problems changes efficiency, most at very small shapes and again in the power-limited large-shape regime.

10 Routing, Capacity, and Load Balancing

A routing decision is both a model choice and a distributed-work request. For each token, the router produces soft scores and selects K experts, creating K requested routes. Capacity then determines which requests are kept. Dispatch moves the kept rows to the expert-owning ranks; on the rowwise real-count path, grouped GEMM executes their densely packed expert segments, and combine returns their weighted contributions. Requested and kept routes coincide when no route is dropped, but they are different objects whenever capacity overflows.

Load-balancing mechanisms influence future requests, while capacity limits how many of the current requests are admitted. The resulting workload has both an expert-level shape and a destination-rank total. The former controls expert training signal and grouped GEMM geometry, while the latter controls communication, buffer use, overflow, and straggling. After establishing those systems consequences, we compare the scopes and mechanisms used to balance routes and then analyze a failure of the standard Switch-style auxiliary objective (Fedus et al., 2022): its scalar can fall while requested routing becomes less balanced.

Requested Routes and Kept Routes

The current **load-balancing loss (LBL)** and post-batch bias controller (Section 10.6) use requested top- K assignments. Capacity and dispatch use kept assignments, and the rowwise path also uses their real counts for grouped GEMM. When routes are dropped, neither histogram is a substitute for the other.

10.1 From Top- K Selection to the Executed Workload

Consider one routed layer with N global experts and M_E expert-parallel ranks. Let source rank s hold T_s tokens, and let $S_{s,t}$ be the K experts selected for token t . One pair (t, i) with $i \in S_{s,t}$ is a **route**. The number of routes requested from source rank s to expert i is

$$C_{s,i}^{\text{req}} := \sum_{t=1}^{T_s} \mathbf{1}\{i \in S_{s,t}\}, \quad \sum_{i=1}^N C_{s,i}^{\text{req}} = K T_s. \quad (19)$$

Aggregate over sources to obtain the global requested count $C_i^{\text{req}} := \sum_s C_{s,i}^{\text{req}}$. If $\rho(i)$ is the expert-parallel rank that owns expert i , the total demand placed on destination rank q is

$$R_q^{\text{req}} := \sum_{i:\rho(i)=q} C_i^{\text{req}}. \quad (20)$$

Thus the same top- K decisions define two workload distributions: counts over experts and sums over the experts colocated on each destination rank.

Capacity acts between requested routes and execution. Let $C_{s,i}^{\text{keep}}$ be the routes admitted by the capacity policy and define

$$\begin{aligned} D_{s,i} &:= C_{s,i}^{\text{req}} - C_{s,i}^{\text{keep}}, & C_i^{\text{keep}} &:= \sum_s C_{s,i}^{\text{keep}}, \\ D_i &:= C_i^{\text{req}} - C_i^{\text{keep}}, & M_i &:= C_i^{\text{keep}}, & R_q^{\text{keep}} &:= \sum_{i:\rho(i)=q} C_i^{\text{keep}}. \end{aligned} \quad (21)$$

Here $D_{s,i}$ and D_i count source-specific and aggregate dropped routes, M_i is the row count actually presented to expert i (the per-expert row count of Section 9; its subscript is an expert index, not the rank count M_E), and R_q^{keep} is the actual receive and compute load on rank q . Write $\mathbf{C}^x = (C_1^x, \dots, C_N^x)$ for $x \in \{\text{req}, \text{keep}\}$. In a no-drop step, $C_{s,i}^{\text{keep}} = C_{s,i}^{\text{req}}$; otherwise the distinction is essential. A kept histogram can appear benign only because excess demand was dropped, while a requested histogram alone does not describe the work that ran. Table 16 records which part of the training system produces and consumes each routing quantity.

Olmo uses **token-choice routing**: every token selects experts (Shazeer et al., 2017). BASE Layers instead solves a balanced assignment, and Expert Choice lets each expert select tokens; these alternatives change

Quantity	Created by	Consumed by
Router score or logit	Router projection and gating function	The configured score or logit drives top- K ; selected unbiased affinities or logits determine mixture weights; normalized all-expert scores form LBL’s differentiable term
Requested count C^{req}	Top- K expert identifiers	LBL’s detached hard term, post-batch bias feedback, and capacity admission; on the rowwise path, all-gathered requested splits form the keep matrix that determines dispatch destination ranks and row offsets
Kept count C^{keep}	Capacity keep/drop policy	Dispatch and combine payload; expert grouped GEMM row counts on real-count paths; and executed-work diagnostics

Table 16 Three routing quantities participate in different parts of the training system. The current LBL and post-batch bias controller observe requested selections before expert-parallel capacity is enforced.

which side of the token–expert relation imposes the constraint (Lewis et al., 2021; Zhou et al., 2022). The remainder of this section concerns Olmo’s token-choice path.

10.2 The Costs of Imbalance Depend on Where It Appears

For any nonzero load vector $\mathbf{x} \in \mathbb{R}_{\geq 0}^n$ with $n > 1$, define its **max/mean imbalance** as

$$I_{\max}(\mathbf{x}) := \frac{\max_j x_j}{\frac{1}{n} \sum_j x_j} = n \frac{\|\mathbf{x}\|_{\infty}}{\|\mathbf{x}\|_1}. \quad (22)$$

Applying this definition to requested expert counts, kept expert counts, requested destination-rank totals, and kept destination-rank totals answers four different questions (Table 17). The expert-level pair describes selection and executed expert shapes; the rank-level pair describes demand and admitted work at the rank that can become a straggler.

Counts	Over experts	Over destination ranks
Requested	Selection concentration: the training signal the router asks for	Demand on the hottest rank: capacity pressure and drop risk
Kept	Executed expert shapes presented to grouped GEMM	Admitted receive, compute, and combine load on the rank that can straggle

Table 17 Max/mean imbalance over requested and kept routes. Requested and kept counts, over experts or over destination ranks, separate selection concentration, executed expert shape, demand pressure, and admitted straggler load.

Max/mean identifies the hottest coordinate but does not describe how the remaining load is distributed. Let $\pi_j = x_j / \sum_{\ell} x_{\ell}$ be the normalized load distribution and $H(\boldsymbol{\pi}) = -\sum_j \pi_j \log \pi_j$ its entropy. The number of never-selected experts, coefficient of variation, and normalized entropy deficit $I_H(\mathbf{x}) = 1 - H(\boldsymbol{\pi}) / \log n$ capture complementary aspects of concentration. The source–destination request matrix contains more communication information than its row or column sums: it resolves which source rank sends how many rows to which destination rank, the per-pair traffic that row and column totals average away. Drop rate and receiving-buffer utilization then show how capacity transformed demand into executed work.

The **model-side** selection pattern starts with requested expert counts, but routed-expert activations and gradients follow kept counts. An expert can be requested yet receive no signal from a dropped route. At the other extreme, requiring every small or domain-homogeneous microbatch to be uniform can oppose useful specialization. The desirable distribution is therefore scope-dependent: avoiding starvation over the training population does not require every local microbatch to look uniform (Qiu et al., 2025).

The **systems-side** effect starts with kept counts. Even at a fixed rank total, concentrating rows into fewer experts changes the shapes presented to grouped GEMM. Section 9 measured this directly: as the expert-load histogram concentrated, normalized grouped-GEMM throughput declined with entropy deficit, and median throughput in the most-concentrated entropy range ran about seven points below the least concentrated

(Figure 40). A matched appendix comparison further shows that a single-spike and a three-hot-expert histogram with the same maximum load can have different grouped-GEMM times (Figure 72). These fixed-work microbenchmarks isolate local expert computation; they do not include dispatch, cross-rank waiting, or a learned-router trajectory.

Destination-rank imbalance adds those omitted costs. A rank with high R_q^{req} consumes capacity faster and is more likely to drop routes. A rank with high R_q^{keep} receives more rows, performs more expert work, returns more outputs, and can delay peers or a pipeline stage. Expert-level and rank-level imbalance can also move independently: a rank may receive a balanced total that is concentrated in one of its local experts, or several moderately hot local experts may make the whole rank a straggler, so diagnostics need both levels.

10.3 Rank-Wide Capacity Bounds Work Without Balancing It

Let $T_{\text{route}} = KT_s$ be the number of routes produced by one source expert-parallel rank. When source ranks hold equal token counts and each destination owns the same number of experts, balanced expert routing places an average of T_{route} requested rows on each destination rank: the factor M_E from all sources cancels the probability $1/M_E$ of choosing any one destination. Olmo’s rowwise sync-free path reserves the destination-rank budget

$$C_{\text{rank}} := \max(1, \lceil c T_{\text{route}} \rceil), \quad (23)$$

where c is the capacity factor. This is **one shared limit for all experts owned by the destination rank**, not one independent limit per local expert. If the rank owns N_{local} experts, its balanced per-expert mean is $T_{\text{route}}/N_{\text{local}}$. The rank budget alone can therefore fit one expert at approximately

$$\frac{C_{\text{rank}}}{T_{\text{route}}/N_{\text{local}}} \approx c N_{\text{local}}, \quad (24)$$

times that mean if its neighbors are sufficiently cool. This is a bound on what can fit, not evidence that a trained router reaches it.

The shared budget lets a hot local expert use capacity left unused by cooler local experts while the aggregate admitted demand remains within C_{rank} . A conventional independent expert capacity instead assigns each of the N_{local} experts a limit near

$$C_{\text{expert}} \approx \left\lceil \frac{c T_{\text{route}}}{N_{\text{local}}} \right\rceil. \quad (25)$$

At approximately the same aggregate reserved rows, that policy can drop routes to one hot expert while neighboring experts leave their allocations unused (Lepikhin et al., 2021; Fedus et al., 2022). The rank-wide rule trades an individual expert bound for flexible sharing within a destination-rank bound.

Reserved capacity and executed rows are also distinct. Olmo’s rowwise NVSHMEM path allocates capacity-shaped receive and combine buffers but packs valid rows densely at the front. If the kept local-expert counts are $(M_1, \dots, M_{N_{\text{local}}})$, the grouped-GEMM offsets are

$$o_j := \sum_{i=1}^j M_i, \quad j = 1, \dots, N_{\text{local}}. \quad (26)$$

Only $[0, o_{N_{\text{local}}})$ belongs to expert compute. Unused capacity rows lie outside every expert interval and may contain stale values. On this path, communication uses fixed capacity but grouped GEMM processes no padding rows: the device-side real-count offsets described in Sections 8 and 9 separate physical allocation from logical work. Other dispatch paths may instead pass capacity-padded splits to expert compute.

On every capacity-enabled sync-free forward, all expert-parallel ranks all-gather their requested split counts and independently derive the same deterministic **keep matrix**. For each destination, the current policy flattens counts in local-expert-major, then source-rank order, cumulatively admits routes until it reaches C_{rank} , and keeps a prefix within each source/expert split. Restoration and combine mask the tail-dropped routes. This makes overflow bounded and reproducible, but the ordering can affect which routes survive; a capacity evaluation should therefore report the distribution of drops, not only their total.

The aggregate **route-drop fraction** is

$$\delta_{\text{route}} := \frac{\sum_{s,i} D_{s,i}}{\sum_{s,i} C_{s,i}^{\text{req}}} = \frac{\sum_{s,i} D_{s,i}}{\sum_s K T_s}. \quad (27)$$

For $K > 1$, this is not the fraction of tokens that lose every routed contribution. A model-quality analysis should separately report tokens that lose at least one route, tokens that lose all K , and the selected mixture weight removed by dropping.

Capacity Bounds Admitted Work

Capacity bounds the receive-buffer storage and the worst-case admitted rank work after an outlying routing event. It filters requests after selection; the bound itself provides no guarantee of balanced requested load. The intended regime is *nearly dropless under the observed routing distribution*: balancing keeps normal demand within the fixed budget, while capacity handles rare excursions. This is not an unconditional dropless guarantee.

10.4 A Shared Rank Budget Drops No More Routes than Matched Expert Budgets

Two capacity policies can reserve the same aggregate rows on a destination rank yet admit different subsets of a skewed request histogram. Figure 41 shows the mechanism on one four-expert example, and Table 18 compares the two allocation policies.

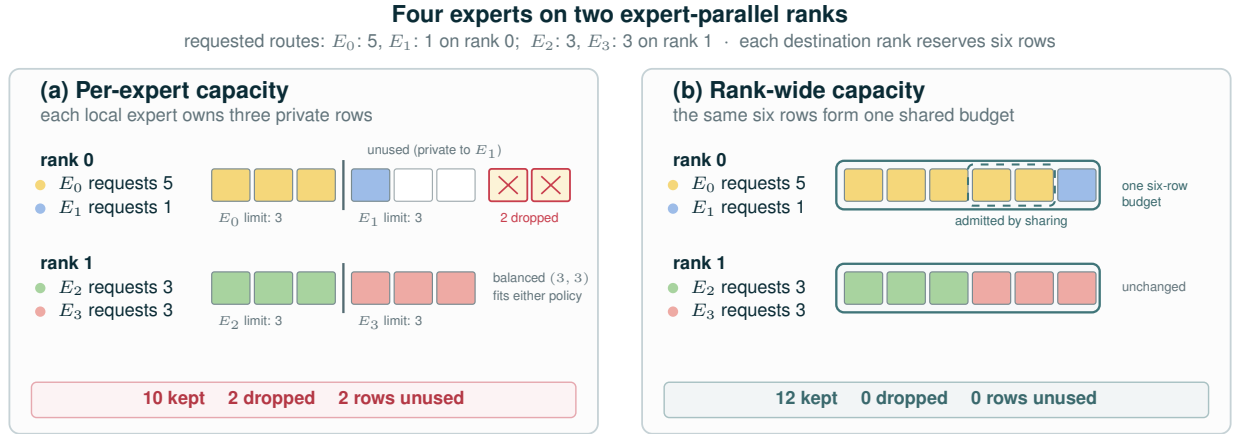


Figure 41 Rank-wide capacity shares a destination rank’s unused rows among its local experts. Both policies reserve six rows per destination rank for the same requested routes. (a) Independent three-row expert limits drop two E_0 routes while E_1 ’s two private rows sit unused. (b) One shared six-row budget admits every request; the dashed outline marks the two routes that only pooling admits. Rank 1’s balanced demand is identical under both policies. Each colored block is one requested route; a crossed block is dropped, and an empty block is a reserved, unused row. Conceptual illustration with no measured quantities.

At exactly matched aggregate rows, the drop advantage from pooling unused capacity is algebraic. Given a destination-rank total budget B and independent expert budgets b_j satisfying $\sum_j b_j = B$, the total drops for requested local-expert counts C_j^{req} are

$$D^{\text{rank}} = \left[\sum_j C_j^{\text{req}} - B \right]_+, \quad [z]_+ := \max(z, 0). \quad (28)$$

$$D^{\text{expert}} = \sum_j [C_j^{\text{req}} - b_j]_+,$$

Policy	Allocation unit	Unused capacity and overflow	Expert compute
Independent per expert	One limit for each local expert	Rows reserved by a cool expert cannot admit routes for a hot neighbor; overflow is expert-local	Padded BMM may execute capacity rows; grouped GEMM can still use real kept counts
Shared rank-wide	One aggregate limit for the destination rank	Local experts draw from one budget; overflow begins only when their aggregate fills the rank budget	Olmo’s rowwise path packs kept rows and uses real cumulative offsets; another sync-free path can execute capacity-padded splits

Table 18 Rank-wide and per-expert policies allocate a matched aggregate row budget differently. Pooling lets a hot expert use rows that an independent expert budget would leave unused.

Because $[\sum_j z_j]_+ \leq \sum_j [z_j]_+$,

$$D^{\text{rank}} \leq D^{\text{expert}}. \quad (29)$$

A shared rank budget therefore **cannot drop more routes in total** than independent expert budgets with the same aggregate rows. The budgets must match after integer rounding; a shared nominal capacity factor alone need not give equal aggregate rows. The inequality is strict when a hot expert exceeds its private budget while a neighbor leaves rows unused. It does not prove a universally better training policy: rank-wide tail-drop may preserve a different set of tokens and deliberately gives up the stronger per-expert workload bound.

Per-expert capacity is the standard drop-and-pad formulation in GShard and Switch Transformer (Lepikhin et al., 2021; Fedus et al., 2022). Megatron-Core likewise documents both a per-expert capacity factor and, for the HybridEP and NCCL-EP backends of its flex token dispatcher, a per-expert-rank capacity factor (NVIDIA, 2026c). Comparisons therefore need to specify the capacity policy for the backend and revision being compared.

Capacity reacts to overload after selection. Balancing instead changes future requested demand, beginning with the token scope over which that demand is measured.

10.5 Load-Balancing Scope Is Part of the Training Objective

The *balance batch* is the set of tokens used to construct the requested hard frequency vector. It need not coincide with the optimizer batch, and changing it changes the training objective even when the language-modeling batch, optimizer, and model are unchanged. A narrow scope asks every small token group to use the experts uniformly; a broad scope allows imbalance within one sequence, rank, domain, or microbatch as long as it is compensated elsewhere in the balance batch. The latter can reduce conflict between load balancing and specialization when microbatches are small or domain-homogeneous (Qiu et al., 2025).

For a balance batch of T tokens, N routed experts, and K selections per token, let $f_i = C_i^{\text{req}}/(KT)$ be expert i ’s fraction of requested routes before capacity, and let $P_i = T^{-1} \sum_{t=1}^T p_{t,i}$ be its mean router score, with $p_{t,i}$ normalized across experts for each token. The Switch-style load-balancing loss couples these two statistics (Lepikhin et al., 2021; Fedus et al., 2022):

$$\mathcal{L}_{\text{LBL}} := N \sum_{i=1}^N f_i P_i = N \mathbf{f}^\top \mathbf{P}. \quad (30)$$

The hard fractions f_i are treated as constants; gradients flow through P_i . The factor N keeps the balanced value equal to one as the expert count changes. The external coefficient multiplying this loss in the training objective is omitted here.

Table 19 separates five relevant scopes, including three distributed or accumulation-aware variants that are often conflated under “global load balancing.” Only the first two are implemented as Olmo LBL granularities today.

The last two rows are not interchangeable. Let $m = 1, \dots, M$ index the microbatches in one gradient-accumulation window. Let $C_{m,i}^{\text{req}}$ be expert i ’s requested count after synchronization over balance group $\mathcal{G}$,

Scope	Statistics and semantics	Coordination and cost	Olmo status
Instance	One per-sequence hard histogram, reduced across tensor- and context-parallel shards as applicable, paired with each shard’s local differentiable soft-score contribution	Reductions induced by sequence sharding	Implemented as instance
Rank-local microbatch	Current rank’s current microbatch; unrelated local sequences can compensate, while CP shards remain local	No additional count communication	Implemented as local_batch
Synchronized current microbatch	Current hard counts reduced over the stage-local token balance group; each rank contributes its local soft term	One N -element count all-reduce per routed-layer forward	Design only
GA-buffered online global	Synchronized counts accumulated through gradient accumulation; microbatch m uses the prefix through m	Same all-reduce plus an N -element per-router buffer	Design only; analogous to Megatron global_aux_loss
Exact optimizer-batch global	Final hard counts and soft-score sums over all ranks and all accumulation microbatches	Delayed backward, retained graphs, or a routing prepass; stale statistics instead define an approximation	Not implemented

Table 19 Load-balancing scopes and their current Olmo status. “Online global” is accumulation-aware but is not the exact optimizer-batch objective.

let T_m be the corresponding valid-token count, and let

$$Q_{m,i} := \sum_{r \in \mathcal{G}} \sum_{t \in (r,m)} p_{t,i} \quad (31)$$

be the conceptual global soft-score sum, where $p_{t,i}$ is token t ’s normalized router score for expert i . A token-weighted online variant uses the frequency and microbatch loss

$$\tilde{f}_{m,i} := \frac{\sum_{j=1}^m C_{j,i}^{\text{req}}}{K \sum_{j=1}^m T_j}, \quad P_{m,i} := \frac{Q_{m,i}}{T_m}, \quad \mathcal{L}_m^{\text{online}} := N \sum_{i=1}^N \tilde{f}_{m,i} P_{m,i}. \quad (32)$$

This applies Equation 30 with accumulating hard counts and current-microbatch soft scores. Section 10.7 analyzes why this hard/soft coupling need not track requested-load balance. Microbatch one sees only its own counts; microbatch two sees the first two; and so forth. Once an early microbatch has backpropagated, its gradient is not recomputed when later counts arrive. The method expands the effective scope online but is not the exact optimizer-batch objective unless $M = 1$. The buffered approximation analyzed by Qiu et al. (2025) accumulates routing counts across microbatches. The Megatron implementation maintains the microbatch-number mean $\bar{C}_{m,i} = m^{-1} \sum_{j \leq m} C_{j,i}^{\text{req}}$ and uses $N \sum_i \text{sg}(\bar{C}_{m,i}) Q_{m,i} / (K T_m^2)$, where sg denotes stop-gradient (NVIDIA, 2026e). It equals Equation 32 when all microbatches contain the same number of valid tokens. With padding, masking, or variable-size packed microbatches, Equation 32 is a proposed token-weighted generalization rather than a description of the literal Megatron formula.

Equation 32 defines a conceptual global loss. A per-rank implementation can use local soft-score sums and rely on distributed gradient reduction, but the scale of that local contribution follows from the gradient-averaging convention of the DDP implementation—here `MultiGroupDistributedDataParallel` (Section 4)—so the correct group-size factor differs across training stacks rather than transferring between them.

In contrast, define final optimizer-batch statistics

$$C_i^{\text{step}} := \sum_{m=1}^M C_{m,i}^{\text{req}}, \quad Q_i^{\text{step}} := \sum_{m=1}^M Q_{m,i}, \quad T^{\text{step}} := \sum_{m=1}^M T_m. \quad (33)$$

The exact optimizer-batch objective is

$$\mathcal{L}_{\text{LBL}}^{\text{step}} = \frac{N}{K(T^{\text{step}})^2} \sum_{i=1}^N \text{sg}(C_i^{\text{step}}) Q_i^{\text{step}}. \quad (34)$$

Every microbatch’s soft-score sum is now weighted by the same final count vector. Olmo backpropagates each gradient-accumulation microbatch as it is processed, so implementing this objective literally would require retaining every graph until the final count is known, performing an additional routing prepass, or substituting stale statistics. These choices add memory, compute, or approximation error.

The synchronization group must follow router-token sharding rather than expert-parameter sharding. The intended Olmo design uses the stage-local DP×CP group: it includes distinct data- and context-parallel token shards for the same router layer, excludes other pipeline stages, and operates on counts over global expert identifiers before expert-local slicing. Using **WORLD** under pipeline parallelism would mix different layers and can violate collective ordering; using an expert replica or placement group would answer a different question. The count payload is only N elements, but its collective occurs once per routed layer and microbatch, so its cost is set by launch latency and collective ordering rather than by bytes.

The scope choice changes both specialization pressure and systems behavior. Smaller scopes suppress immediate local skew but can discourage specialization. Broader scopes permit locally skewed batches and require communication or delayed information; a globally balanced count can still leave one expert-parallel rank transiently hot. Changing the scope changes the training recipe, including both its balancing pressure and coordination cost.

10.6 Auxiliary Gradients and Hard-Count Feedback Are Different Controllers

Switch-style LBL adds a differentiable term whose detached requested counts become coefficients on the router’s soft-score gradient. DeepSeek-style auxiliary-loss-free balancing instead treats requested load as feedback to a non-trainable selection controller (Wang et al., 2024; DeepSeek-AI et al., 2024). Let $a_{t,i}$ be the unbiased quantity used for selection, let $\omega_{t,i}$ be the unbiased affinity used for weighting, and let b_i be a persistent expert bias. Neither $a_{t,i}$ nor $\omega_{t,i}$ includes b_i . Selection and mixture weighting use

$$S_t = \text{TopK}_i(a_{t,i} + b_i, K), \quad w_{t,i} = \text{Normalize}_{j \in S_t}(\omega_{t,j})_i. \quad (35)$$

The bias changes which experts are selected, while their mixture weights come from the original affinities. For top- K softmax routing, $a_{t,i} = z_{t,i}$ and $\omega_{t,i} = \exp z_{t,i}$; score-based routing can use $a_{t,i} = \omega_{t,i} = p_{t,i}$. DeepSeek uses sigmoid affinities (DeepSeek-AI et al., 2024); Olmo applies the same biased-selection pattern to the configured router scores.

Over one feedback window, define the requested count and its mean as

$$C_i^{\text{fb}} := \sum_t \mathbf{1}\{i \in S_t\}, \quad \bar{C}^{\text{fb}} := \frac{1}{N} \sum_i C_i^{\text{fb}}. \quad (36)$$

The controller updates outside autograd,

$$b_i \leftarrow b_i + \gamma \text{sign}(\bar{C}^{\text{fb}} - C_i^{\text{fb}}). \quad (37)$$

Underloaded experts receive a positive selection offset and overloaded experts a negative one. The update acts on future requested assignments; it does not observe which routes a downstream capacity policy kept.

Olmo enables this controller whenever the bias-update rate is positive. Requested counts accumulate across the microbatches of one training batch. A post-batch hook applies Equation 37 after the final backward and before the optimizer step, then resets the accumulator. The router’s count reduction defaults to the **WORLD** process group unless a balance group is explicitly configured. The next batch selects from unbiased scores plus the persistent bias, while mixture weights still come from unbiased affinities.

Under PP, the controller requires a stage-local balance group: the default **WORLD** group mixes counts from different router layers. This report makes no claim about the controller’s model quality, stability, feedback-scope behavior, or systems cost.

When used without LBL, the controller removes the balancing-loss gradient and its potential interference with cross-entropy. Its behavior still depends on the update rate and feedback scope. A large γ can make loads oscillate around the target; a small value can lag behind a changing router; and a broad feedback scope

can hide per-sequence or rank-local hotspots (Wang et al., 2024). DeepSeek-V3 reports retaining a very small sequence-level auxiliary safeguard alongside its bias controller (DeepSeek-AI et al., 2024). Its update rate and safeguard coefficient are recipe choices rather than universal constants.

When bias feedback and LBL are enabled together, the bias affects the requested counts used by LBL: hard selections depend on $\mathbf{a} + \mathbf{b}$, while LBL’s soft mean still uses the unbiased normalized scores $\mathbf{p}$. The selected experts can therefore differ from those favored by the scores entering the soft term. The coefficient λ_{LBL} and bias-update rate γ control these different feedback paths.

We next analyze the auxiliary-loss controller, separating what its scalar value measures from the effect of its gradient.

10.7 Token Gerrymandering: The Model Learns to Hack the LBL Objective

Figure 42 previews the empirical result of Section 10.8.1: after a checkpoint branch, the trajectory that keeps the larger LBL coefficient drives its load-balancing loss down while its load imbalance climbs, and the branch with the smaller coefficient stays balanced. This subsection and Section 10.8 explain why the objective rewards that trade.

The LBL Scalar Is a Signed Cross-Term, Not a Balance Certificate

The standard objective couples requested hard-route frequency to the mean soft router-score vector. After centering both vectors at uniform load, the coupling is a signed cross-term rather than a distance from uniform requested load. Frequently selected experts can win many tokens by small margins while rarely or never selected experts absorb soft mass without winning—the failure mode we call **Token Gerrymandering**.

10.7.1 Requested Hard Assignments and Soft Mass

Consider one routed layer and one balance batch containing T tokens. Let N be the number of routed experts, let each token select K experts, and let S_t be token t ’s selected set. For this theoretical block, write $C_i \equiv C_i^{\text{req}}$ for the requested top- K count aggregated over the chosen balance batch. Capacity is downstream of this statistic and does not enter the current LBL implementation.

Requested Hard Load and Soft Mass

The requested route count, normalized requested fraction, and mean normalized router score for expert i are

$$C_i \equiv C_i^{\text{req}} := \sum_{t=1}^T \mathbf{1}\{i \in S_t\}, \quad f_i := \frac{C_i}{KT}, \quad P_i := \frac{1}{T} \sum_{t=1}^T p_{t,i}. \quad (38)$$

Both $\mathbf{f}$ and $\mathbf{P}$ are probability vectors: $\sum_i f_i = \sum_i P_i = 1$. The hard vector $\mathbf{f}$ describes which experts top- K selected before capacity. The soft vector $\mathbf{P}$ is a differentiable summary of router scores; it is neither a selected-route histogram nor an executed workload. If no route is dropped, $C_i^{\text{req}} = C_i^{\text{keep}}$; the LBL algebra itself does not assume that equality.

A direct requested-load metric used by Olmo is the maximum expert count divided by the mean expert count. It is the expert-level instance of Equation 22:

$$I_{\text{max}}^{\text{req}} := \frac{\max_i C_i}{\frac{1}{N} \sum_i C_i} = N \max_i f_i. \quad (39)$$

Perfect requested balance gives $I_{\text{max}}^{\text{req}} = 1$. The number of never-selected experts, the coefficient of variation of the C_i , and the sum of counts placed on each expert-parallel rank provide complementary views. Requested counts determine demand; capacity converts demand into the kept counts that determine expert compute and actual communication.

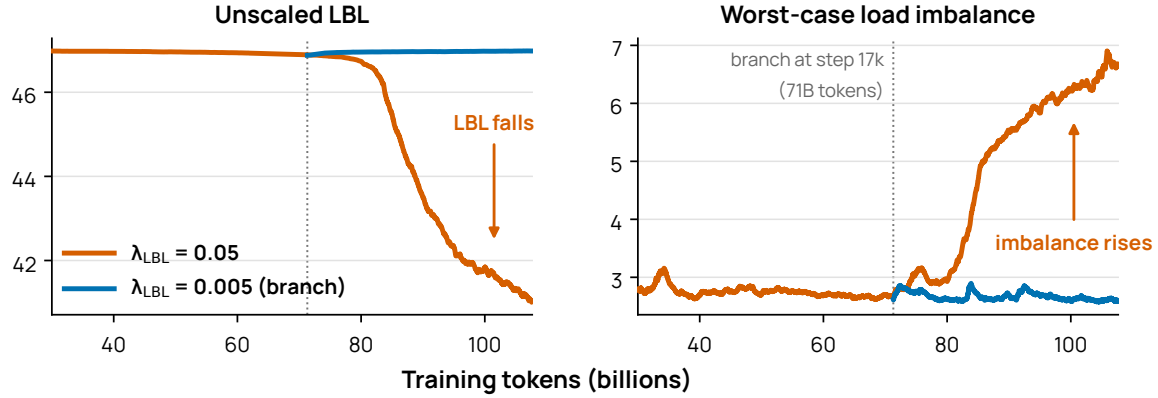


Figure 42 The load-balancing loss falls while load imbalance rises. Orange is the original $\lambda_{\text{LBL}} = 0.05$ trajectory; blue reloads the step-17,000 checkpoint with $\lambda_{\text{LBL}} = 0.005$. Unscaled LBL is the sum over the 47 MoE blocks; imbalance is the worst max/mean expert count over blocks and ranks. Smoothed traces only; Figure 45 adds the raw measurements and the cross-entropy panel, and Section 10.8.1 gives the protocol.

The Switch-style loss in Equation 30 instead couples the hard and soft vectors. Olmo constructs C_i^{req} from top- K indices before capacity under no-gradient bookkeeping and differentiates Equation 30 only through P_i . For sigmoid routing, the scores used by this loss are normalized across experts before the dot product, so the analysis below applies to both normalized sigmoid and softmax scores.

The standard presentation associates the minimum of this objective with uniform requested and soft routing (Fedus et al., 2022, Section 2.2 and Appendix F). That conclusion would follow immediately if one could identify the soft proxy with requested load. If $\mathbf{P} = \mathbf{f}$, then

$$\mathcal{L}_{\text{LBL}} = N \|\mathbf{f}\|_2^2 = 1 + N \|\mathbf{f} - \mathbf{u}\|_2^2, \quad u_i := \frac{1}{N}, \quad (40)$$

and uniform requested load is the unique minimizer. Top- K routing does not impose $\mathbf{P} = \mathbf{f}$. It imposes only an ordering constraint within each token: selected experts must outrank unselected experts. Aggregating those token-wise inequalities does not make the two expert-wise marginals equal.

10.7.2 The Centered Form Exposes the Surrogate

Let $\mathbf{u} = (1/N, \dots, 1/N)$ be uniform load. Because both $\mathbf{f} - \mathbf{u}$ and $\mathbf{P} - \mathbf{u}$ sum to zero, expanding Equation 30 gives

$$\mathcal{L}_{\text{LBL}} = 1 + N(\mathbf{f} - \mathbf{u})^\top (\mathbf{P} - \mathbf{u}) = 1 + N^2 \text{Cov}_{i \sim \text{Unif}([N])}(f_i, P_i). \quad (41)$$

Here the covariance is taken across expert coordinates within one balance scope. It is not a stochastic claim about correlation over training time.

In Equation 41, if the hard and soft deviations point in the same direction, the centered inner product is positive and the loss exceeds one. If either vector is uniform, or if their deviations are orthogonal, the loss equals one. If the deviations are anti-aligned, the loss is below one. In particular,

$$\mathbf{P} = \mathbf{u} \implies \mathcal{L}_{\text{LBL}} = 1 \quad \text{for every probability vector } \mathbf{f}. \quad (42)$$

With deterministic tie breaking, uniform scores can pair exactly with a collapsed requested-route histogram; with strict routing margins, that pair can be approached arbitrarily closely by giving the winning expert an infinitesimal advantage. Thus collapse can have the same limiting scalar value as perfect balance. More strongly, the compatible anti-aligned constructions below score *better* than perfect balance.

The scalar thus fails as a balance metric even though its stop-gradient construction can still push score mass away from frequently selected experts. Liu (2024) gave a compatible one-dead-expert counterexample in which the scalar falls below one, while Su (2025) emphasized that the scalar value and its balancing gradient

are different objects. In peer-reviewed work, Lange et al. (2026) identified a related blind spot in which global-batch LBL can appear balanced even when some experts remain barely used. The centered form makes that blind spot exact: Equation 30 controls one signed cross-term, but it controls neither $\|\mathbf{f} - \mathbf{u}\|_2$ nor $\|\mathbf{P} - \mathbf{u}\|_2$ separately. The following constructions quantify how far the scalar can fall below one under imbalanced routing.

10.7.3 A Six-Token Counterexample

The smallest useful example has two experts, top-1 routing, and six tokens. No capacity filter is present, so requested and kept routes coincide. Ignore the batch dimension and use the normalized score matrix

$$\begin{bmatrix} 1.0 & 0.0 \\ 1.0 & 0.0 \\ 0.4 & 0.6 \\ 0.4 & 0.6 \\ 0.4 & 0.6 \\ 0.4 & 0.6 \end{bmatrix}. \quad (43)$$

Expert 1 wins the first two tokens, while expert 2 wins the other four. The requested hard and soft marginals are

$$\mathbf{C}^{\text{req}} = (2, 4), \quad \mathbf{f} = \left(\frac{1}{3}, \frac{2}{3}\right), \quad \mathbf{P} = \left(\frac{3}{5}, \frac{2}{5}\right). \quad (44)$$

The requested imbalance is $I_{\max}^{\text{req}} = 4/3$, yet

$$\mathcal{L}_{\text{LBL}} = 2 \left(\frac{1}{3} \frac{3}{5} + \frac{2}{3} \frac{2}{5} \right) = \frac{14}{15} \approx 0.9333 < 1. \quad (45)$$

Panels (a) and (b) of Figure 43 recast the six-token example as equal winner-take-all “elections.” Both panels hold $\mathbf{P} = (3/5, 2/5)$ fixed; moving from the hard-balanced panel (a) to panel (b) changes the requested route fraction from $(1/2, 1/2)$ to $(1/3, 2/3)$. The same soft mass is packed into two decisive expert-1 wins while expert 2 wins four by smaller margins; the requested expert load becomes less balanced as the auxiliary scalar falls from one to $14/15$.

After aggregation, the lightly loaded expert holds more soft mass and the heavily loaded expert less, so their centered marginals are exactly anti-aligned, the property quantified by Equation 41. The election analogy describes only this concentration of score mass; the tokens themselves stay fixed.

This example disproves any monotonic interpretation of $\mathcal{L}_{\text{LBL}}$ as requested-route imbalance: a lower value coexists with a higher value of the direct requested-load metric. It is not itself an optimum. The next result shows that the discrepancy is a global score-level property rather than an isolated numerical choice.

10.7.4 Perfect Balance Is Not the Global Score-Level Optimum

For two experts and top-1 routing, relabel the underloaded expert as expert 1 and write

$$\mathbf{f} = (x, 1 - x), \quad 0 \leq x \leq \frac{1}{2}. \quad (46)$$

For one token, let q be its soft probability for expert 1. The token’s contribution to $\mathbf{f}^\top \mathbf{p}_t$ is

$$xq + (1 - x)(1 - q) = (1 - x) + (2x - 1)q. \quad (47)$$

Since $2x - 1 \leq 0$, this quantity decreases as q increases. On the fraction x of tokens routed to expert 1, the smallest contribution is approached by $q \rightarrow 1$, giving contribution x . On tokens routed to expert 2, top-1 routing requires $q < 1/2$; the smallest contribution is approached by $q \rightarrow 1/2$ from below, giving contribution $1/2$. Therefore, for a fixed requested load x ,

$$\inf \mathcal{L}_{\text{LBL}}(x) = 2 \left[x \cdot x + (1 - x) \frac{1}{2} \right] = 1 - x + 2x^2. \quad (48)$$

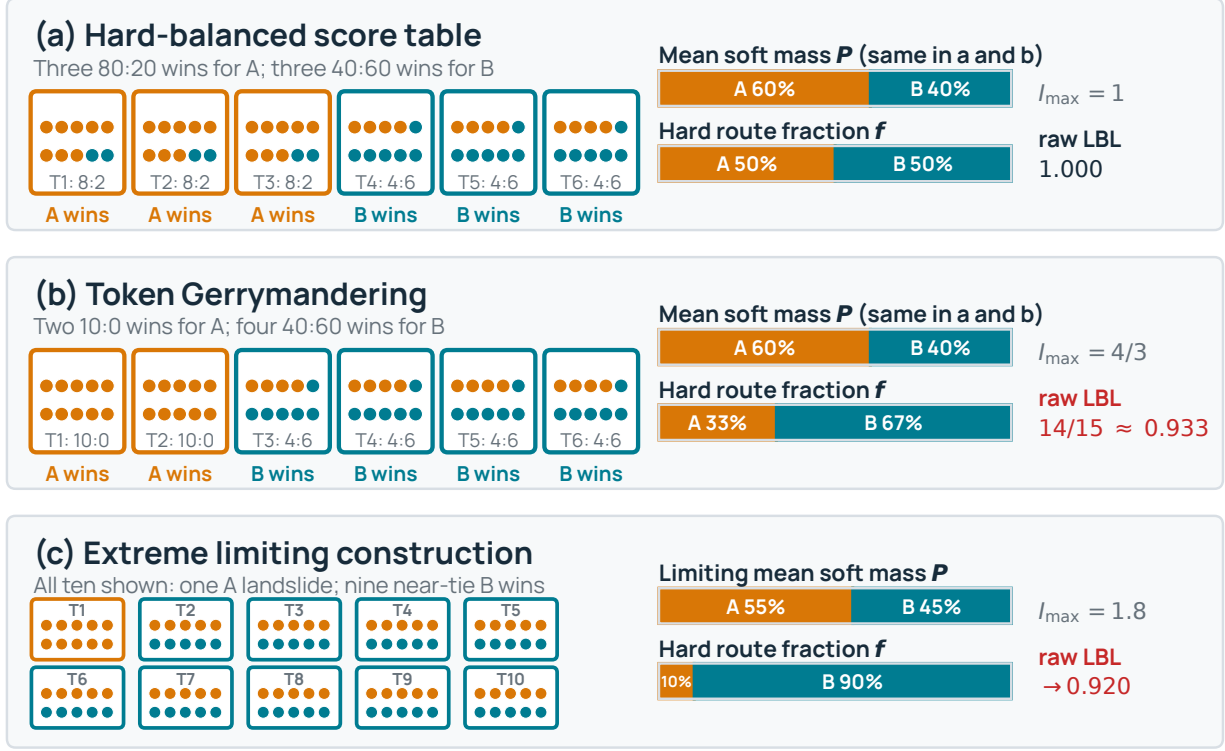


Figure 43 Soft router mass and requested routes can diverge sharply. Orange denotes expert 1 (A), and teal denotes expert 2 (B). Each outlined tile is one token in a two-expert, top-1 router. Its ten interior dots discretize the normalized scores used to form $\mathbf{P}$; the tile border marks the sole selected route, which is also executed in this capacity-free construction. Panels (a) and (b) hold $\mathbf{P} = (3/5, 2/5)$ fixed. Panel (a) is hard-balanced, with $\mathbf{f} = (1/2, 1/2)$ and unscaled LBL equal to one. Panel (b) concentrates expert 1’s soft mass into two decisive wins while expert 2 wins four tokens 0.6–0.4, giving $\mathbf{f} = (1/3, 2/3)$, $I_{\max}^{\text{req}} = 4/3$, and LBL = $14/15$. Panel (c) draws all ten tokens in an extreme limit: one (1, 0) expert-1 win and nine $(1/2 - \epsilon, 1/2 + \epsilon)$ expert-2 wins yield $\mathbf{f} = (0.1, 0.9)$, $\mathbf{P} \rightarrow (0.55, 0.45)$, $I_{\max}^{\text{req}} = 1.8$, and LBL $\rightarrow 0.92$. Panel (c)’s five-orange/five-teal dot patterns show the $\epsilon \rightarrow 0^+$ limiting soft mass; their teal borders mark the strict expert-2 wins for every $\epsilon > 0$. Dots belonging to the losing expert are soft scores, not selected routes. Exact zeros, ones, and $\epsilon \rightarrow 0^+$ are boundary idealizations approachable with finite logits; the panels are feasible score tables, not a training trajectory, and the displayed values are counterexamples rather than minima.

Differentiating the final quadratic gives its minimum at $x = 1/4$:

$$\inf_{x, \{\mathbf{p}_t\}} \mathcal{L}_{\text{LBL}} = \frac{7}{8}, \quad \mathbf{f} = \left(\frac{1}{4}, \frac{3}{4}\right). \quad (49)$$

Thus the global score-level infimum has a 1:3 requested-load split, whereas perfect balance has value one. For the fixed 2:4 split in Equation 44, the infimum is $8/9$; replacing the four $(0.4, 0.6)$ rows by $(1/2 - \epsilon, 1/2 + \epsilon)$ approaches that value.

The result is an *infimum*: a finite softmax cannot produce an exact zero or one, and strict top-1 assignment approaches the overloaded expert’s tie from one side. Finite T also discretizes x . The result concerns free per-token normalized score tables with compatible requested counts; it does not claim that every shared linear router attains a smooth finite-logit minimum. A balanced positive-margin assignment is a flat, non-strict local plateau with value one while its requested assignments remain unchanged; it is simply not the global score-level optimum.

10.7.5 Token Gerrymandering Scales to Many Experts

The two-expert gap is bounded, but the same mechanism becomes much stronger with many experts. Choose A active experts and $D = N - A$ dead, or never-selected, experts. Route tokens uniformly among the active experts, so an active expert has $f_j = 1/A$ and a dead expert has $f_d = 0$. For $0 < \epsilon < 1$, on a token routed to active expert j , choose the limiting score pattern

$$p_{t,j} = \frac{1 + D\epsilon}{D + 1}, \quad p_{t,d} = \frac{1 - \epsilon}{D + 1} \text{ for every dead expert } d, \quad p_{t,r} \rightarrow 0 \text{ for other active experts } r, \quad (50)$$

then take $\epsilon \rightarrow 0^+$. These scores sum to one in the zero-tail limit, and expert j beats every dead expert by ϵ . The dead experts collectively absorb almost all soft mass, but none is selected. An active expert wins only $1/A$ of the tokens, so

$$P_j \rightarrow \frac{1}{A(D + 1)} \implies \mathcal{L}_{\text{LBL}} \rightarrow \frac{N}{A(N - A + 1)}. \quad (51)$$

For $N = 64$ and $A = 16$, the limiting loss is $64/(16 \cdot 49) \approx 0.0816$, even though 48 experts are dead and $I_{\text{max}}^{\text{req}} = \frac{N}{A} = 4$. Choosing $A \approx (N + 1)/2$ makes the constructed value approximately $4/N$ while roughly half the experts are unused. An even sharper asymptotic comparison takes $A \approx \sqrt{N}$: then $\mathcal{L}_{\text{LBL}} = O(N^{-1/2})$ approaches zero while $I_{\text{max}}^{\text{req}} = \Theta(N^{1/2})$ diverges and almost every expert is dead. These are feasible limiting constructions, not claims about the typical route distribution of a trained model. Figure 44b plots this family over the full range of A .

The construction also extends to top- K . Select each token's K winners uniformly from $A \geq K$ active experts. For $0 < \epsilon < 1/K$, give each winner score $(1 + D\epsilon)/(D + K)$, each dead expert score $(1 - K\epsilon)/(D + K)$, and the other active experts scores approaching zero, then take $\epsilon \rightarrow 0^+$. Every active expert has $f_j = 1/A$ and $P_j \rightarrow K/[A(D + K)]$, yielding

$$\mathcal{L}_{\text{LBL}} \rightarrow \frac{NK}{A(N - A + K)}. \quad (52)$$

The construction upper-bounds the general score-level infimum and is enough to refute uniform global optimality. We do not claim that Equation 52 is the exact optimum for arbitrary (N, K, T) , tie breaking, grouped selection, or score-correction bias.

The many-expert construction preserves the same requested-load/soft-mass anti-alignment as the two-expert example.

10.7.6 A Larger Scope Does Not Repair the Surrogate

Changing the balance scope leaves the scalar's limitation intact. For any scope in which $\mathbf{f}$ and $\mathbf{P}$ are normalized over the same tokens, Equation 41 still holds. A global-batch LBL gives the router more tokens over which to satisfy the constraint; it does not turn $N\mathbf{f}^\top \mathbf{P}$ into a norm of global requested load. Instance-level balancing prevents cancellation between sequences, but it does not remove the anti-alignment construction within one sequence. Likewise, synchronized-microbatch, online-global, and exact optimizer-batch statistics change which tokens may compensate for one another without changing the signed cross-term itself.

10.8 Gradient Dynamics and the Joint Objective

The requested counts are detached, so within a region where top- K assignments do not change, $\mathbf{f}$ is constant. For top-1 softmax logits $z_{t,i}$, differentiating Equation 30 gives

$$\frac{\partial \mathcal{L}_{\text{LBL}}}{\partial z_{t,i}} = \frac{N}{T} p_{t,i} (f_i - \mathbf{f}^\top \mathbf{p}_t). \quad (53)$$

For every token, the auxiliary gradient transfers soft mass toward experts whose requested load f_i is below the score-weighted average. This is the intended balancing pressure. A task-preferred, frequently selected expert can nevertheless remain the winner by an arbitrarily small margin while cold or dead experts absorb much of the differentiable mass. The gradient can therefore improve the surrogate faster than it improves the requested-selection histogram.

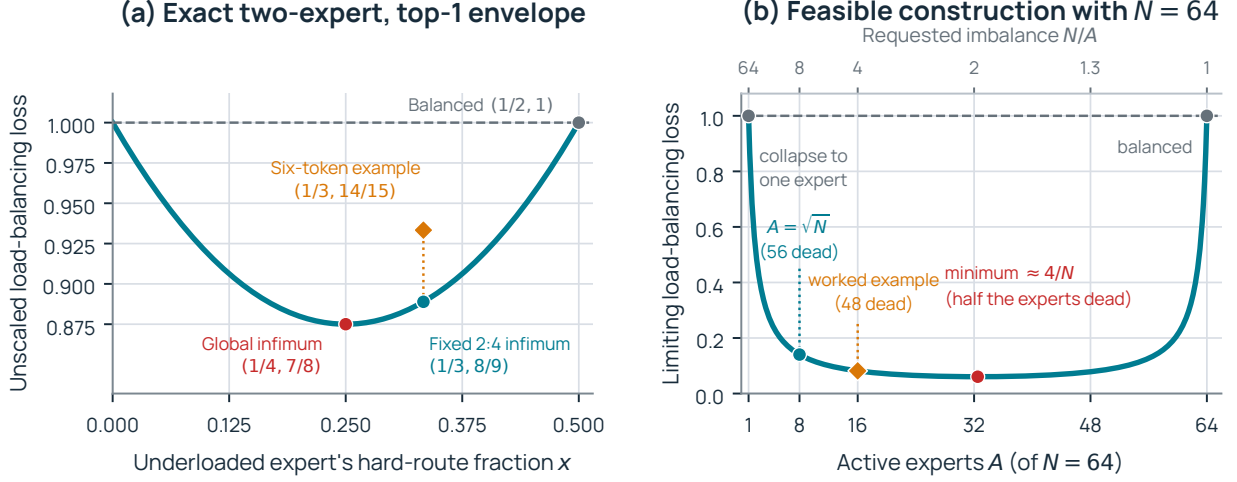


Figure 44 The Switch-style scalar can prefer imbalanced requested routes. Panel (a): for two experts and top-1 routing, the fixed-load score-level infimum is $1 - x + 2x^2$. Its minimum is $7/8$ at a 1:3 route split; the supplied six-token score matrix lies above that envelope at $14/15$, while perfect balance has value one. Panel (b): the limiting value $N/(A(N - A + 1))$ of the explicit $N = 64$ construction in Equation 51 as the active-expert count A varies. The interior of the curve lies far below the balanced value of one while the requested imbalance $\frac{N}{A}$ on the top axis grows; the marks show the $A = \sqrt{N}$ comparison, the worked $A = 16$ example, and the minimizing $A \approx (N + 1)/2$. At both endpoints the scalar returns to exactly one, so even total collapse onto a single active expert matches the balanced score. Both panels are analytical; they contain no training measurements.

Routing boundaries make the dynamics discontinuous. When two scores cross, the hard vector $\mathbf{f}$ changes abruptly and the gradient field is recomputed. A shared router may cross, cycle around, or avoid the limiting score tables above. The theory establishes feasible objective geometry; by itself it does not prove that stochastic gradient descent reaches a stable gerrymandered routing pattern.

The connection to training appears only after restoring the auxiliary coefficient. Write the optimized objective as

$$\mathcal{L}_{\text{train}} = \mathcal{L}_{\text{CE}} + \lambda_{\text{LBL}} \mathcal{L}_{\text{LBL}} + \mathcal{L}_{\text{other}}, \quad (54)$$

where $\mathcal{L}_{\text{CE}}$ is next-token cross-entropy (CE) and $\mathcal{L}_{\text{other}}$ contains every other enabled term, such as a router z-loss (Zoph et al., 2022) or language-model z-loss (Chowdhery et al., 2023). Compare the model before and after a routing transition on the same evaluation batch with fixed loss normalization. If the transition hurts language modeling but reduces LBL, then

$$\Delta \mathcal{L}_{\text{CE}} > 0, \quad \Delta \mathcal{L}_{\text{LBL}} < 0. \quad (55)$$

The post-transition model has a lower scalar objective exactly when

$$\Delta \mathcal{L}_{\text{train}} < 0 \iff \lambda_{\text{LBL}} (-\Delta \mathcal{L}_{\text{LBL}}) > \Delta \mathcal{L}_{\text{CE}} + \Delta \mathcal{L}_{\text{other}}. \quad (56)$$

Whether an LBL coefficient is *high* depends on the net CE and other-term cost of a reachable routing transition, the number of routed layers contributing auxiliary loss, and the implementation's layer and microbatch normalization; there is no universal numerical threshold. A larger coefficient does not change the minimizers of LBL alone; it changes which compromises lower the joint objective. When such a compromise wins, the observable pattern is the **surrogate-hacking signature**: the optimized objective falls while both language-modeling loss and requested imbalance worsen. This before-and-after comparison is not an optimizer-dynamics theorem: momentum and stochastic gradients need not lower the instantaneous loss of every training batch, and losses from different batches do not define the deltas above.

10.8.1 Empirical Signature of Reachable Collapse

The score-level constructions do not show that stochastic training reaches a gerrymandered routing pattern. Figure 45 provides a checkpoint-branched test in a 48-layer, 64-expert, top-4 MoE. The original trajectory uses instance-level LBL with $\lambda_{\text{LBL}} = 0.05$. At step 17,000 (71.3 billion training tokens), before the observed divergence, a second trajectory reloads the same model and optimizer checkpoint and changes the coefficient to 0.005. This intervention controls the starting point more tightly than an independent-from-scratch coefficient sweep. Dispatch is dropless in these runs, so requested counts are also the executed expert loads. Block 0 is dense, so the logged global LBL is the sum over 47 MoE blocks; the logged global load imbalance is the worst max/mean expert count over those blocks and distributed ranks. Appendix B.7 records the full run recipe and the archived-history provenance.

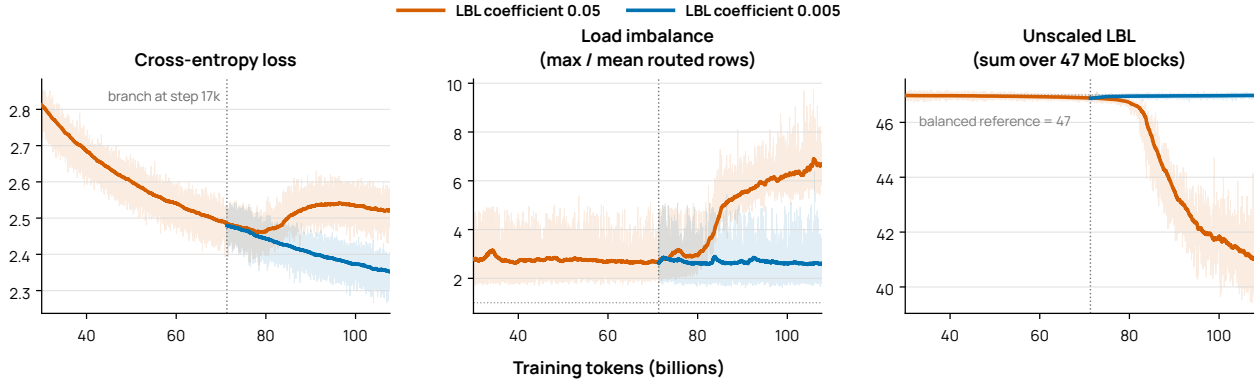


Figure 45 Checkpoint-branched training with different LBL coefficients. With the higher coefficient, the surrogate falls while CE and imbalance rise. Orange shows the original $\lambda_{\text{LBL}} = 0.05$ trajectory; blue shows the branch that reloads the step-17,000 checkpoint with $\lambda_{\text{LBL}} = 0.005$. After the checkpoint branch, the high-coefficient trajectory eventually develops worsening CE and sharply rising worst-block/rank max/mean expert-count imbalance even as its unscaled LBL falls. The low-coefficient branch instead continues improving CE while its LBL and imbalance remain stable. Light traces show every raw training measurement; thick traces use a time-weighted exponential moving average (TWEMA) with a 0.75-billion-token half-life. The dotted vertical line marks the step-17,000 branch point. This is a checkpoint-branched result for one configuration, not a universal coefficient threshold.

The comparison establishes the surrogate–workload mismatch (Table 20). Between the early and late windows, the high-coefficient trajectory lowers its unscaled LBL sum by about twelve percent while its worst-case load imbalance more than doubles and its CE worsens; the low-coefficient branch improves CE while its LBL stays near the balanced reference and its imbalance does not rise. The effect is not isolated to one layer: median imbalance increases in all 47 MoE blocks on the high-coefficient trajectory, and over the branched interval its unscaled LBL and worst-case load imbalance have Spearman correlation -0.87 .

Median over window	High coefficient ($\lambda_{\text{LBL}} = 0.05$)			Low-coefficient branch (0.005)		
	Early	Late	Change	Early	Late	Change
CE loss	2.473	2.523	+2.0%	2.469	2.358	−4.5%
Unscaled LBL sum	46.864	41.278	−11.9%	≈ 47	≈ 47	stable
Worst-case load imbalance	2.748	6.317	+129.9%	2.655	2.544	−4.2%

Table 20 Loss and imbalance before and after the observed collapse. Medians over steps 17,001–17,999 (early) and 24,000–25,669 (late), both after the step-17,000 branch. Unscaled LBL is the sum over the 47 MoE blocks, whose balanced reference is 47; imbalance is the worst max/mean expert count over blocks and ranks. The low-coefficient branch’s LBL is reported only as its proximity to that reference.

The unscaled LBL and CE curves in Figure 45 have different weights in the optimized objective. Figure 46 combines them with those weights for the high-coefficient trajectory.

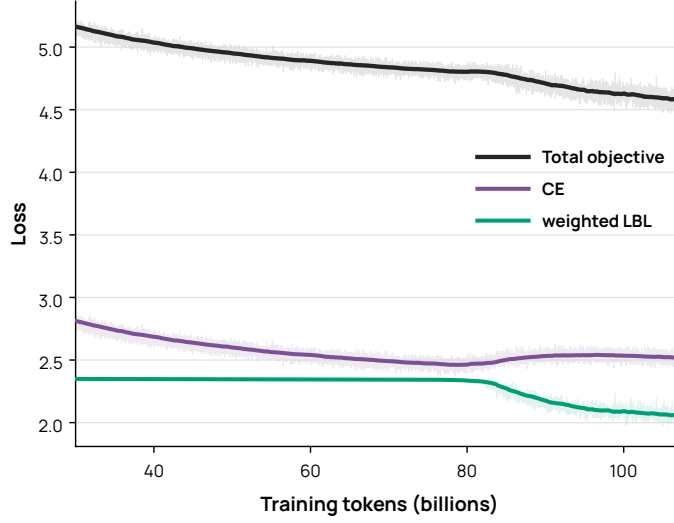


Figure 46 The reconstructed objective decreases despite worsening CE. This panel shows only the original $\lambda_{\text{LBL}} = 0.05$ trajectory; black, purple, and green now denote the total and its distinct components rather than different coefficient settings. Across the collapse interval, the decrease in coefficient-weighted LBL more than offsets the increase in CE, so the reconstructed optimized objective—CE plus weighted LBL plus the enabled LM-head z-loss—continues downward. Light traces show every raw training measurement; thick traces use a TWEMA with a 0.75-billion-token half-life.

Over the same windows, the effective weighted LBL contribution falls from 2.343 to 2.064, enough for the reconstructed optimized objective to decrease from 4.820 to 4.591 (−4.8%) despite the CE regression. Olmo injects LBL through a custom autograd term rather than adding it to one monolithic forward-loss scalar. The plotted objective therefore reconstructs the optimized scalar from the separately logged CE, coefficient-weighted LBL, and LM-head z-loss. Router z-loss is disabled in these runs.

This establishes reachability of the predicted surrogate-hacking signature for this configuration: training can lower the effective objective while making both language modeling and routed workload worse. It does not locate a universal coefficient threshold or establish how frequently the failure occurs. These are also stochastic training-batch curves rather than losses reevaluated on one fixed batch, and the archived metrics do not contain same-scope $\mathbf{f}$ and $\mathbf{P}$ vectors. Attributing the trajectory to the exact hard/soft anti-alignment construction would require the centered term in Equation 41, or equivalent evidence from soft mass on never-selected experts and top- K -top- $(K + 1)$ margins. A lower LBL scalar did not certify a more balanced expert workload.

10.9 Measuring Routing Transients and Outcomes

Routing is nonstationary, especially early in training. A router can move from near-random assignments through sharp transients before reaching a more stable distribution, and both capacity utilization and step time can move with it. Uniform or random expert assignment is useful for isolating an optimistic balanced systems path, but it is not a substitute for trained routing. Interpreting throughput therefore requires knowing whether the routes are artificially balanced, early-transient, or drawn from a declared stable training window. Three diagnostic questions connect those routing conditions to the model and systems outcomes.

What did the router request, and what did capacity admit? C^{req} records selected top- K routes before capacity, and C^{keep} records the rows admitted for expert execution. When no route is dropped the two hard histograms coincide. Otherwise both histograms are needed. Route-drop rate, the fraction of tokens losing at least one or all selected routes, selected weight removed by dropping, and receiving-buffer utilization describe how capacity changed the workload and removed model contributions.

Which experts or ranks became bottlenecks? Max/mean and a full-distribution statistic for requested expert counts, the number of never-selected experts, and the maximum requested load on one expert-parallel rank distinguish expert concentration from rank pressure. The corresponding kept-count statistics describe the work that actually ran. Grouped-GEMM and step time connect kept counts to computation; the source-destination request matrix and rank waiting connect demand and admitted work to communication and straggling.

Did balance improve, or only the surrogate? The soft mean $\mathbf{P}$ summarizes differentiable router mass rather than selected or executed routes. Diagnosing Token Gerrymandering requires the requested hard fraction $\mathbf{f}$ and soft mean $\mathbf{P}$ from the same routed layer and load-balancing scope. Their centered inner product, together with $\|\mathbf{f} - \mathbf{u}\|_2$ and $\|\mathbf{P} - \mathbf{u}\|_2$, separates anti-alignment from the magnitude of each deviation; top- K -top- $(K+1)$ margins and soft mass on never-selected experts provide complementary evidence. Pearson correlation alone is insufficient because it is undefined when either vector is uniform and discards the magnitudes that determine LBL.

The effect on the optimized objective depends on the effective LBL contribution after layer and microbatch normalization, together with every enabled auxiliary term. An unscaled LBL curve beside CE can disprove the scalar’s use as a balance certificate, but it cannot establish why the optimizer preferred a transition.

The evidence in this section establishes the objective geometry, the fixed-work grouped-GEMM sensitivity, and the reachability of the surrogate-hacking signature in one checkpoint-branched training comparison. The requested and kept workloads, rather than the auxiliary scalar alone, connect routing to the expert GEMMs and communication that the training system executes.

11 MXFP8 Training

Routing determines which expert GEMMs run and how their work is distributed. MXFP8 changes the precision and volume of the operands those GEMMs compute with and communicate.

Microscaling (MX) formats pair a low-precision payload with one shared power-of-two scale per small block of values; MXFP8 is the member with an FP8 payload and 32-value blocks, standardized by the Open Compute Project (OCP) together with the FP8 payload formats (Micikevicius et al., 2022; Rouhani et al., 2023; Open Compute Project, 2023). In training, MXFP8 requires changes to operand quantization, scale layouts, saved activations, expert transport, and weight refresh after each optimizer update. Those changes can accelerate sufficiently large GEMMs, reduce storage for selected saved activations, and shrink expert-communication payloads. They also add conversion, layout, transport-management, caching, and backward work. Section 11.1 quantifies the potential savings and explains why persistent training-state memory stays approximately unchanged.

Blackwell is the main hardware target for the implementation described here. Hopper supports FP8 Tensor Core operations; Blackwell adds native support for the 32-value, E8M0-scaled block representation used by MXFP8 (Open Compute Project, 2023; NVIDIA, 2026p). The Tensor Core operation can consume quantized operands and their block scales together. Software must still create both components in the layouts expected by the instruction.

Table 21 separates ordinary FP8 support from native MXFP8 support. Hopper accelerates E4M3 and E5M2 FP8, but it does not provide the block-scaled matrix instruction that consumes an E8M0 scale per 32 payload values. The Blackwell variants in the table do. Their instruction families differ: data-center Blackwell uses `tcgen05.mma`, while SM120 RTX Blackwell exposes block scaling through `mma.sync`.

GPU	CC	Dense peak (TFLOP/s)			Native MAFP8	Matrix-instruction family
		BF16	FP8	FP4		
H100 SXM	9.0	989.5	1979	—	No	wgmma.mma_async
HGX B200, per GPU	10.0	2250	4500	9000	Yes	tcgen05.mma_block_scale
HGX B300, per GPU	10.3	2250	4500	13500	Yes	tcgen05.mma_block_scale
RTX PRO 6000 Blackwell, 600 W	12.0	503.8	1007.6	2015.2	Yes	mma.sync_block_scale

Table 21 FP8 support alone does not imply native MAFP8 support. Peak columns report dense theoretical Tensor Core TFLOP/s. H100 dense values are half of NVIDIA’s published 2:4-sparse figures. HGX B200/B300 system figures are normalized to one of eight GPUs and to dense execution; the HGX page lists FP8 and BF16 as sparse peaks with dense as half, and lists FP4 as both sparse and dense values for B200 and B300. The RTX row uses the Workstation Edition 600-W specifications. Compute capabilities and precision support follow NVIDIA’s TensorRT matrix; instruction names follow the CUTLASS and PTX documentation (NVIDIA, 2026q,r, 2025b, 2026v,j, 2025a).

11.1 Benefits of MAFP8 Training

Where MAFP8 Saves Time and Memory

MAFP8 can make large GEMMs faster, selected saved activations smaller, and expert communication lighter. Persistent memory grows slightly instead: the recipe retains two quantized weight orientations alongside the FP32 main weights and optimizer states.

11.1.1 Faster GEMMs

A BF16 GEMM uses two bytes per input value and the BF16 Tensor Core path. The Olmo MAFP8 recipe uses one E4M3 payload byte per value plus block scales, and on Blackwell GPUs it uses the higher-throughput FP8 Tensor Core path. Peak Tensor Core specifications list an exact $2\times$ FP8-to-BF16 ratio on both Hopper and Blackwell (Table 21) (NVIDIA, 2026q,r). That ratio is an arithmetic ceiling, not an end-to-end speedup: quantization (Q), dequantization (DQ), scale construction, layout conversion, kernel launches, small GEMMs, communication, and all non-GEMM work remain on the step timeline.

Figure 47 contrasts the operands supplied to the BF16 and native MAFP8 Tensor Core paths. The BF16 path consumes two BF16 matrices. The MAFP8 path consumes E4M3 qdata together with one E8M0 scale per 32 values along the reduction dimension. On Blackwell, the instruction-level primitive is a fifth-generation Tensor Core matrix multiply–accumulate (MMA): the MAFP8 path uses the block-scaled `tcgen05.mma` family. The scale shapes in the figure are the logical pre-swizzle grids; the physical blocked layouts consumed by the instruction are more specialized. Appendix A.5 separates the PyTorch operator, GEMM kernel, and Tensor Core instruction interfaces in more detail.

The attainable speedup depends on shape. Large dense GEMMs can amortize operand quantization and scale-layout work over substantial matrix multiplication. A routed layer may instead present many smaller expert GEMMs, where the same fixed work occupies a larger fraction of kernel time. Weight quantization is easier to amortize because its caches are rebuilt after an optimizer update and reused across the following microbatches. Activation quantization is paid on each invocation.

11.1.2 Smaller Saved Activations

For a block of 32 values, the nominal MAFP8 representation contains 32 bytes of E4M3 qdata and one byte of E8M0 scale. Ignoring blocked-layout padding, its storage per value is

$$B_{\text{MAFP8}} = 1 + \frac{1}{32} = \frac{33}{32} \text{ bytes/value}, \quad (57)$$

compared with two bytes per BF16 value. Replacing a *unique* BF16 saved tensor with this representation saves $31/32$ bytes per value, a nominal reduction of $1 - 33/64 \approx 48.4\%$. If another operator already keeps

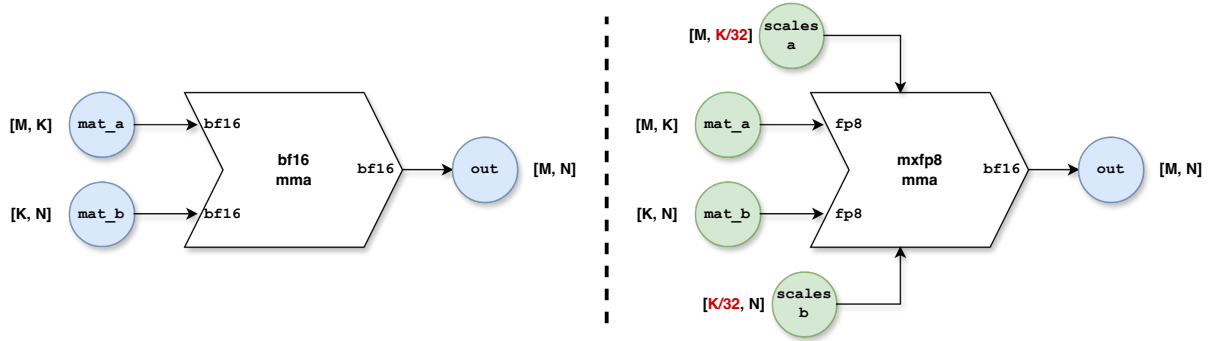


Figure 47 BF16 and native MXFP8 Tensor Core paths. For $A \in \mathbb{R}^{M \times K}$ and $B \in \mathbb{R}^{K \times N}$, the MXFP8 operation consumes E4M3 qdata and logical scale grids of shape $M \times (K/32)$ and $(K/32) \times N$ before scale swizzling. “MMA” names the native Tensor Core operation accurately: Blackwell provides `tcgen05.mma` instructions with the `kind:mx8f6f4` and `block_scale` modifiers for this computation. Olmo invokes the higher-level `scaled_mm` operator, whose kernel includes the MMA main loop and an epilogue that converts the accumulator to the requested BF16 output. Thus, BF16 labels the completed operator output, not the raw MMA accumulator.

the same BF16 activation alive, adding an MXFP8 copy instead costs another 33/32 bytes per value. The implementation must therefore determine whether another operator already retains each BF16 tensor before choosing its saved precision. In our attention path, for example, the QKV projection and output projection use different save policies because their BF16 inputs are retained by different parts of the backward graph. Figure 58 (Section 11.4) shows the resulting boundary between forward-time packing and backward-time unpacking.

11.1.3 Smaller Dispatch and Combine Payloads

Rowwise EP normally moves one hidden row for each routed token–expert assignment. A BF16 row of width d carries $2d$ payload bytes. When d is a multiple of 32, its nominal MXFP8 representation carries $d + d/32 = 33d/32$ bytes, again a 48.4% reduction in the row payload.

This does not halve the whole communication operation. Route indices, route weights, counters, and synchronization are unchanged. Qdata and scales also need destinations and transfers of their own. MXFP8 reduces the numerical payload for dispatch and combine, and that reduction is useful when the saved transport time exceeds the added quantization, scale, and transfer-management work.

11.1.4 Persistent Training-State Memory

Each linear weight is consumed in two orientations. Forward computes with $W^\top$, while dgrad computes with W . Each orientation needs its own qdata and scale layout. We call these qdata-and-scale representations **MXFP8 compute-weight caches**, or simply **weight caches** in this section. At nominal storage, the two MXFP8 views require $2 \times 33/32 = 2.0625$ bytes per original weight value. This is 3.125% more than one two-byte BF16 compute weight even before blocked-scale padding.

Our optimizer also retains an FP32 main weight and FP32 optimizer states. After the MXFP8 caches have been initialized, the full BF16 initialization anchor can be released, but the two caches take its place. MXFP8 therefore does not remove the persistent training-state memory wall by itself. EP, PP, and distributed optimizer sharding remain responsible for dividing parameters, gradients, and optimizer tensors, as described in Part II.

Figure 48 compares the two recipes. MXFP8 replaces a two-byte BF16 compute weight with two cache orientations of nearly the same combined size, so the composition of persistent training state changes while its total stays approximately constant.

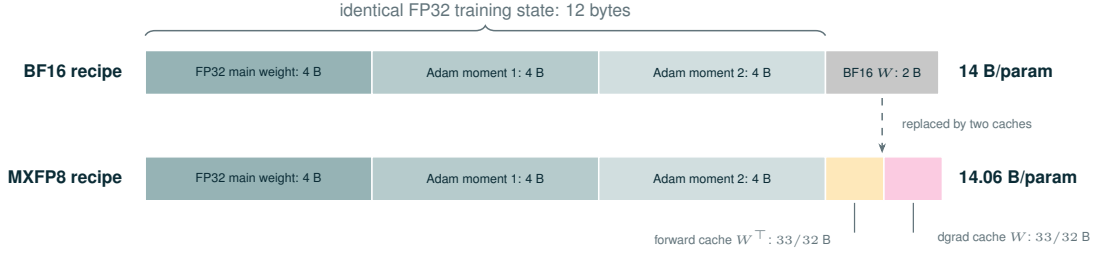


Figure 48 Persistent memory with BF16 weights and two MXFP8 weight caches. Nominal bytes per parameter: both recipes keep the FP32 main weight and two FP32 Adam moments; the BF16 recipe adds one two-byte compute weight, while the MXFP8 recipe replaces it with the forward and dgrad weight caches at 33/32 bytes each. Gradient buffers are identical in both recipes and excluded, and blocked-scale padding is ignored. Conceptual illustration of the nominal accounting with no measured quantities.

11.2 Understanding the MXFP8 Format

An MXFP8 tensor is defined by more than its one-byte E4M3 payload. Its E8M0 scales, the number of payload values that share each scale, and the physical scale layout consumed by a particular operand role are equally important. These details explain why conversion has separate quantization and swizzle costs, why qdata and scales cross operator boundaries together, and why native MXFP8 GEMM requires Blackwell-specific hardware support. Figure 49 compares the bit layouts involved: the BF16 baseline, the two payload formats the OCP MX specification permits, and the E8M0 scale.

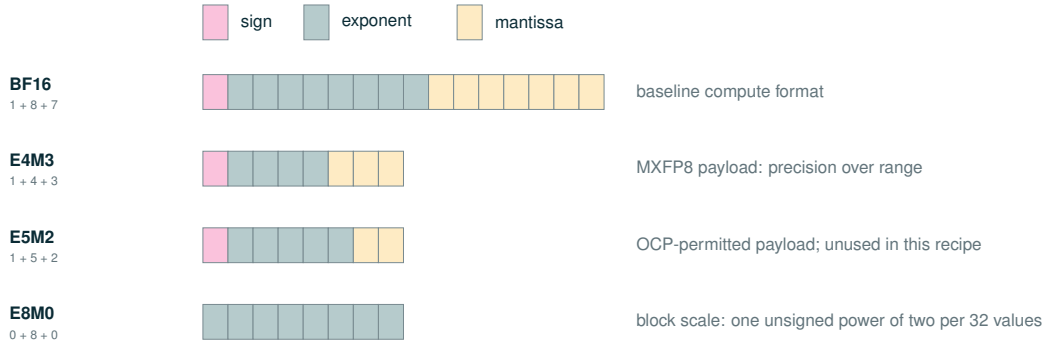


Figure 49 Bit layouts of the baseline, payload, and scale formats. BF16 keeps eight exponent bits and seven mantissa bits. The E4M3 payload trades exponent range for mantissa precision; E5M2 makes the opposite trade and is permitted by OCP MX but unused in the Olmo recipe. The E8M0 scale is an exponent-only format: one unsigned power of two per 32-value block, with no sign and no mantissa.

11.2.1 Quantization, Dequantization, and Swizzle

For a BF16 block x , quantization selects a power-of-two scale s and stores

$$q = \text{E4M3}(x/s), \quad \hat{x} = sq. \quad (58)$$

The qdata q and the scale s together encode one MXFP8 tensor; neither part is usable alone. Dequantization applies the second relation when an operator requires BF16 or FP32 values (Figure 50).

The scale order associated with adjacent 32-value input blocks is not necessarily the blocked order required by a GEMM. Scaled matrix-multiply kernels consume swizzled scale layouts chosen for Tensor Core access. Quantization therefore has two distinct tasks: compute the scale and qdata, then arrange the scales for the operand role and matrix layout used by the kernel. Rowwise communication may use a different addressable

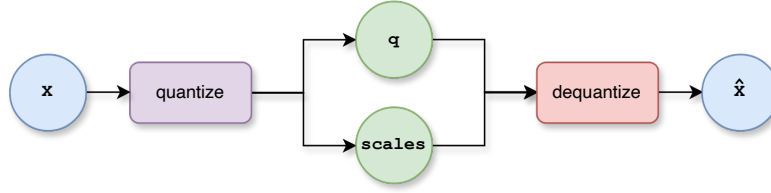


Figure 50 Quantization produces a qdata-scale pair. Dequantization consumes both components and reconstructs $\hat{x} = sq$, an approximation to the original x ; it does not invert quantization exactly.

scale layout from scaled GEMM (NVIDIA, 2026w). Figure 51 draws the block decomposition, and Figure 52 draws the layout distinction.

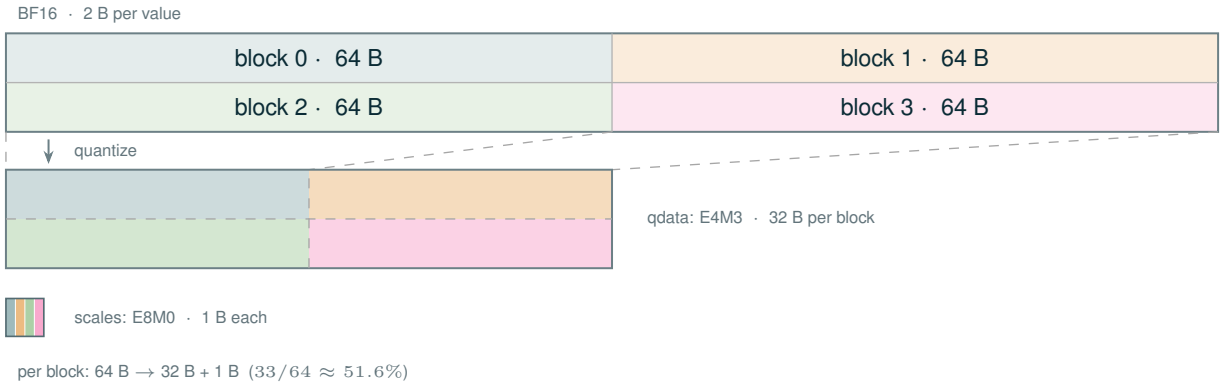


Figure 51 Quantization produces one contiguous qdata array and one contiguous scale array. Sizes are drawn to byte scale for a two-row tensor with two 32-value blocks per row: each 64-byte BF16 block becomes a 32-byte E4M3 qdata block, half as wide, and the flattened scale array adds one E8M0 byte per block, each scale 1/32 the width of a qdata block. The four scales are the narrow strip at the lower left, drawn at true width; color marks which block each scale covers, and the dashed spans are logical: neither array is fragmented. Conceptual illustration with no measured quantities.

A Logical MXFP8 Tensor Has Two Physical Components

One logical MXFP8 tensor is represented by two physical components: **qdata** and **E8M0 scales**, together with the **layout that relates them**. Operators consume qdata and scales together using their associated layout.

11.2.2 Scaling Granularity

The number of values sharing a scale affects both numerical precision and storage cost. A tensor-wide scale is cheap to store but must cover the largest value in the tensor. Per-row or per-channel scales track variation more closely at greater metadata and conversion cost. Block scaling lies between those choices. The OCP MX specification permits E4M3 and E5M2 payload formats. Olmo uses the E4M3 MXFP8 variant: each adjacent block of 32 E4M3 values shares one power-of-two E8M0 scale (Open Compute Project, 2023). Figure 53 contrasts the three granularities.

Smaller scale groups reduce the range that any one scale must cover, but they also increase the number of scales that must be produced, moved, and arranged. The 32-value group is therefore part of both the numerical recipe and the systems interface. Shape divisibility and scale layout are not optional kernel details.

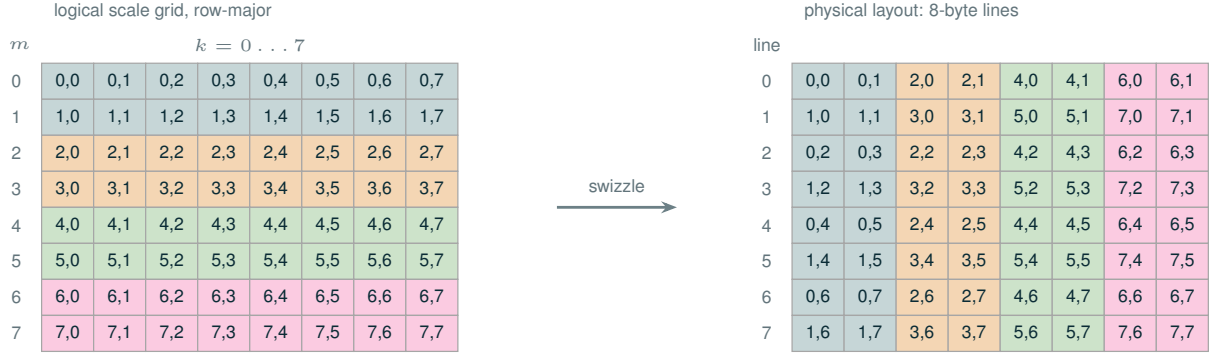


Figure 52 The scale order a GEMM consumes is a tiled, interleaved layout. Cells are labeled m, k for the scale of row m and block column k , and colors mark row groups. Before the swizzle the grid is row-major; after it, each physical line interleaves the four row groups while a row’s scales within a tile stay adjacent. The drawing is a structure-preserving miniature with two-row groups and two-column tiles; the hardware layout applies the same rule with 32-row groups and four-column tiles, rearranging 128×4 tiles of scales into 32 sixteen-byte lines so that rows m , $m+32$, $m+64$, and $m+96$ become physically adjacent (NVIDIA, 2026p). The result resembles a transpose because whole row-group sub-blocks are relocated from a vertical stack to a horizontal line, but it is not one: inside every sub-block, m still advances downward and k rightward, and each scale keeps its m, k identity; only its address changes. Conceptual illustration with no measured quantities.

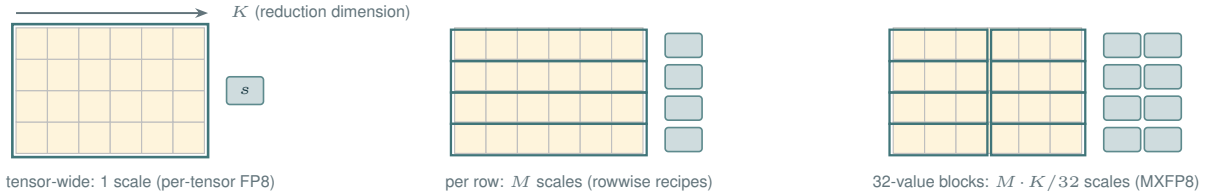


Figure 53 Scale granularity is a spectrum along the reduction dimension. One tensor-wide scale must cover the largest value in the tensor, per-row scales track variation more closely, and 32-value block scales track it most tightly at the highest metadata cost. Conceptual illustration with no measured quantities.

11.2.3 Native Blackwell MXFP8 GEMM

Native block scaling applies the E8M0 scales inside the matrix operation (NVIDIA, 2026p), avoiding a separate materialization of dequantized operands before GEMM. It accelerates the scaled matrix multiplication itself; software still determines how often values are converted into and out of MXFP8. Those conversions are the first challenge examined in Section 11.3.

11.3 Challenges in MXFP8 Training

Around the native block-scaled GEMM, the training system must produce correctly oriented operands for forward, dgrad, and Wgrad; pass qdata and scales through autograd; refresh derived weight caches after each optimizer update; and avoid paying Q, DQ, or scale swizzles more often than necessary. The following challenges determine whether the hardware throughput advantage survives in end-to-end training.

11.3.1 Quantization and Layout Overhead

For one candidate GEMM (Figure 54), MXFP8 is faster only when

$$T_Q + T_{\text{layout}} + T_{\text{MXFP8 GEMM}} + T_{\text{DQ}} < T_{\text{BF16 GEMM}}. \quad (59)$$

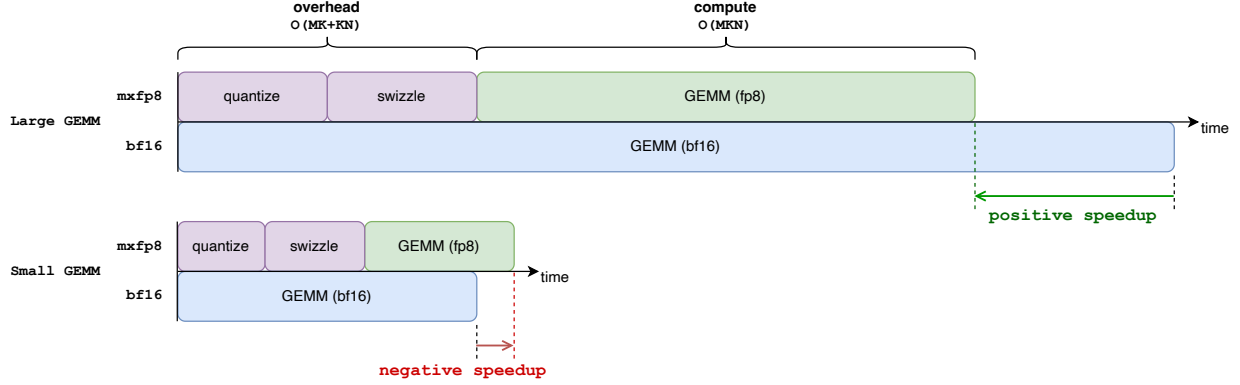


Figure 54 Conversion and layout costs in MXFP8 execution. MXFP8 is faster only when its GEMM savings exceed these costs. This is a schematic cost model, not measured timing. The displayed $O(MK + KN)$ conversion term assumes both operands are quantized on the critical path. In Olmo training, the $K \times N$ weight conversion is normally paid during cache refresh and reused across microbatches, leaving activation conversion as the principal per-invocation cost. For small GEMMs, that remaining overhead can still turn the expected speedup into a slowdown.

Not every term is present on every path. A cached weight avoids Q on each microbatch, and a scaled GEMM that returns BF16 may not need a separate output DQ kernel. A saved activation or communicated row requires Q when it is produced and DQ if its consumer requires BF16. These costs are absent from the Tensor Core peak ratio.

The crossover depends on the matrix dimensions and on expert load. Dense linears usually produce a few large GEMMs; MoE grouped GEMMs divide tokens across experts and can become too small or uneven to amortize conversion and launch overhead. Our single-GPU microbenchmark sweeps these dimensions to locate the crossover.

Prequantized MXFP8 overtakes BF16 at smaller sizes than conversion-inclusive execution. Small square projections do not recover the conversion cost within the single-B300 sweep. Table 22 separates the measured crossover points for prequantized GEMM and cached-weight execution with per-call activation quantization. The sweep also records Q, scale swizzle, Q-plus-swizzle, DQ, and fully dynamic execution alongside the BF16 and MXFP8 GEMMs.

Table 23 answers a different question: it compares operator boundaries at the larger assignment size $M = 32,768$, rather than locating crossovers. Charging LHS quantization at the routed boundary narrows every advantage and leaves the 1024 and 2048 squares and the OLMoE down projection slower than BF16.

Projection family	Prequantized GEMM faster from	Cached RHS, LHS Q included
Rectangular projections	$M = 2,048$	$M = 8,192$
4096 $\rightarrow$ 4096	$M = 4,096$	$M = 16,384$
1024 $\rightarrow$ 1024, 2048 $\rightarrow$ 2048	—	No crossover in sweep

Table 22 Conversion-inclusive execution crosses later than prequantized GEMM. Reported crossover points relative to BF16 from the single-B300 $M = 128$ –16,384 sweep, with three warm-ups and five repeats. The dash means no prequantized threshold is reported here; it is not a claim that those raw GEMMs never cross.

Submission overhead also separates measured kernel work from eager wall time. CUDA-Graph timing shows that Python submission gaps can dominate short eager sequences; removing those gaps measures device-service time, not training wall time. A reported speedup therefore depends on the timing boundary as well as on which conversions it includes.

Projection	Raw MXFP8 GEMM	Shared, cached RHS	Routed, prequantized LHS	Routed, LHS Q charged
1024 $\rightarrow$ 1024	1.00 $\times$	0.25 $\times$	0.52 $\times$	0.31 $\times$
2048 $\rightarrow$ 2048	1.76 $\times$	0.84 $\times$	1.31 $\times$	0.91 $\times$
4096 $\rightarrow$ 4096	1.84 $\times$	1.45 $\times$	1.70 $\times$	1.43 $\times$
4096 $\rightarrow$ 6144	1.84 $\times$	1.53 $\times$	1.71 $\times$	1.49 $\times$
4096 $\rightarrow$ 8192	1.83 $\times$	1.62 $\times$	1.76 $\times$	1.46 $\times$
8192 $\rightarrow$ 4096	1.92 $\times$	1.52 $\times$	1.76 $\times$	1.46 $\times$
2048 $\rightarrow$ 16384	1.76 $\times$	1.66 $\times$	1.49 $\times$	1.33 $\times$
16384 $\rightarrow$ 2048	1.79 $\times$	1.18 $\times$	1.77 $\times$	1.12 $\times$
OLMoE 1536 $\rightarrow$ 3072	1.72 $\times$	0.99 $\times$	1.34 $\times$	1.02 $\times$
OLMoE 1536 $\rightarrow$ 1536	1.60 $\times$	0.48 $\times$	0.95 $\times$	0.55 $\times$

Table 23 At $M = 32,768$, **conversion and layout work separate the raw GEMM speedup from what an operator boundary delivers.** Speedups are relative to the matching BF16 primitive with three warm-ups and five repeats. Shared columns use dense matrix multiplication with the production two-copy scale swizzle; routed columns use grouped GEMM over 16 balanced local experts, so the two families are not directly comparable. The last column additionally charges left-hand-side quantization to the routed boundary.

11.3.2 Forward, Dgrad, and Wgrad Need Different Operands

For a linear layer,

$$Y = XW^\top, \quad \nabla_X = \nabla_Y W, \quad \nabla_W = \nabla_Y^\top X. \quad (60)$$

Forward and dgrad use the same weight parameter but opposite matrix orientations. Olmo consequently stores one prequantized RHS cache for $W^\top$ and another for W . They are derived from one FP32 main weight and must be refreshed together; they are not independent parameters.

The activation has a similar layout problem. In forward, X is the left-hand operand. In Wgrad, the saved X is the right-hand operand of $\nabla_Y^\top X$. The LHS and RHS scale layouts are not interchangeable, so an activation quantized for forward cannot automatically be reused for Wgrad (NVIDIA, 2026w). When Olmo saves X in MXFP8 for Wgrad, it produces the RHS-oriented representation explicitly.

Dense `MXFP8Linear` uses scaled MXFP8 operations for forward, dgrad, and Wgrad. The current routed grouped-Wgrad path is different: it dequantizes the needed operands and uses BF16 grouped matrix multiplication. The tested natural grouped-Wgrad contraction and scale layouts were slower on the measured development shapes.

Figure 55 draws the resulting weight path: one FP32 main weight quantized after each update into the two oriented caches that forward and dgrad consume. It is a zoom of the full routed pipeline in Figure 57 (Section 11.4) and uses that figure’s notation.

11.3.3 Autograd Must Carry qdata and Scales as One Value

PyTorch autograd normally treats one tensor as one differentiable value. MXFP8 instead encodes one BF16 tensor as qdata and scales. A custom autograd interface must carry or save the two components together, remember their layout, and produce the gradient of the original BF16 tensor. It must not expose either component alone as if it were the activation.

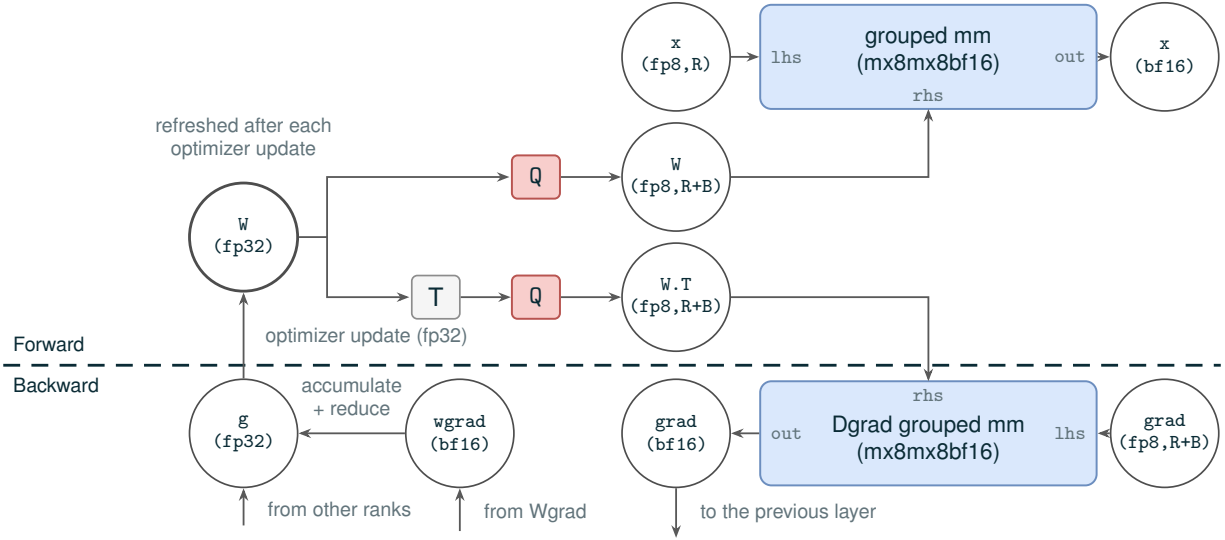


Figure 55 One FP32 main weight becomes two oriented MXFP8 caches. After every optimizer update, the FP32 main weight is quantized into the forward cache and, through an explicit transpose, the dgrad cache, each consumed as the RHS of its scaled grouped GEMM and reused across microbatches until the next update. The figure treats W as the right-hand operand (xW), so its W and $W.T$ labels are W^T and W in the notation of the text. The gather that assembles the sharded main weight stages through a transient BF16 copy freed immediately after quantization; under the FP8-only expert-parameter mode evaluated here, forward and backward hold no weight other than the two caches. The loop closes through the weight-gradient path: the BF16 Wgrad output accumulates into the FP32 gradient buffer and is reduced across ranks before the optimizer update writes the FP32 main weight and triggers the next refresh; the dgrad output flows to the previous layer. Notation: Q quantizes to MXFP8 and T transposes; (fp8, R) is qdata with rowwise scales; (fp8, R+B) keeps rowwise plus blocked (swizzled) scales; mx8mx8bf16 names the two MXFP8 inputs and BF16 output of the grouped GEMM. Conceptual illustration with no measured quantities.

This interface also removes avoidable conversions. In the default fused routed path, adjacent backward stages thread explicit qdata and scales inside one custom-autograd region. An MXFP8 tensor wrapper can carry the same qdata-and-scale pair between split operators. When adjacent layouts agree, the consumer uses the pair directly and avoids MXFP8→BF16 dequantization followed immediately by BF16→MXFP8 requantization.

11.3.4 DDP Must Be MXFP8-Aware

Olmo’s DDP implementation follows the synchronization and precision policy of each parameter group (Section 4). It must also manage MXFP8 weight-cache refresh: qdata and scale caches are not ordinary `nn.Parameter` objects, and they must never be updated directly.

Olmo represents each MXFP8 weight parameter with an `FP8WeightStore`. The store records the parameter name and shape, the required cache orientations, and a high-precision gradient sink. Under the precision policy of Section 4, BF16 Wgrad outputs accumulate into the FP32 gradient buffer and are reduced over the parameter’s replica group. The distributed optimizer then updates the sharded FP32 main weight.

After initialization and every optimizer copy-back, Olmo reconstructs the local weight values and rebuilds all required MXFP8 caches. Training-resume and model-only training loads also perform this refresh before first use. The BF16 initialization anchor may be released after the FP32 main weight and caches exist. It is not a second source of truth. If the main weight advances to step $t + 1$ while a cache remains at step t , the next forward pass uses the previous cache.

Derived Representations of the FP32 Main Weight

The FP32 main weight is authoritative. Forward caches, dgrad caches, BF16 views, and checkpoint views are derived representations and must be rebuilt when the main weight changes.

11.3.5 Scale Selection Is a Training Recipe

Cache refresh determines when weights are quantized; scale selection determines the range and spacing of the values they can represent. The OCP MX v1.0 specification (Open Compute Project, 2023) and the NVIDIA training recipe (Mishra et al., 2025) choose the E8M0 scale differently. OCP’s baseline conversion first rounds the block maximum down to a power of two and divides by 2^8 , the largest power of two representable by E4M3. The round-ceiling (**rceil**) recipe instead divides by the actual E4M3 maximum, 448, and rounds the resulting scale upward to a power of two. Table 24 shows the two conversions in the form implemented by Olmo (Open Compute Project, 2023; Mishra et al., 2025).

OCP v1.0: floor	NVIDIA: round-ceiling (rceil)
<pre>a = max(abs(float(v[0:32]))) e = floor(log2(a)) - 8 e = clamp(e, -127, 127) s = 2**e for i in 0..31: q[i] = sat_E4M3(RNE(float(v[i]) / s)) return q, E8M0(e + 127)</pre>	<pre>a = max(abs(float(v[0:32]))) e = ceil(log2(a / 448)) e = clamp(e, -127, 127) s = 2**e for i in 0..31: q[i] = sat_E4M3(RNE(float(v[i]) / s)) return q, E8M0(e + 127)</pre>

Table 24 Floor and round-ceiling differ only in scale selection. The pseudocode assumes a finite BF16 input block. Both paths store 32 E4M3 values and one E8M0 scale, clamp the unbiased scale exponent to E8M0’s representable range, and use saturating round-to-nearest-even (RNE) conversion for qdata. Zero and non-finite special cases are omitted for clarity.

The **rceil** rule chooses the smallest power-of-two scale that prevents the block maximum from exceeding 448. The **floor** rule can choose a scale that is twice as fine, but then the largest values saturate when the normalized block maximum lies above 448. For $a = 500$, for example, **floor** selects $s = 1$ and clips at 448, whereas **rceil** selects $s = 2$ and avoids clipping.

OCP v1.0 says that its floor-style mechanism should be supported, while also allowing other conversion algorithms. NVIDIA’s experiments identify scale rounding as a training-recipe choice and report that rounding the ratio upward avoids the degradation observed with the floor recipe (Mishra et al., 2025). Olmo implements both modes and uses **rceil** by default, matching Transformer Engine’s documented scaling rule (NVIDIA, 2026w); **floor** remains available for controlled comparisons.

To test whether this local conversion difference affects training, we fork a 31-layer, 8.36B-active/166.72B-total MoE with top-4 routing over 128 routed experts and one shared expert. The common step-6000 checkpoint was trained from scratch with MXFP8 using OCP floor scaling. From that checkpoint onward, the three branches use BF16, MXFP8 **rceil**, and MXFP8 **floor**, respectively. Figure 56 compares the resulting loss and gradient-norm trajectories.

The direction of this result matches the NVIDIA recipe study: round-ceiling scaling follows the higher-precision baseline, whereas floor scaling produces a visible loss degradation (Mishra et al., 2025).

11.4 The Olmo MXFP8 Recipe for MoE

The optimizer keeps the authoritative main weights in FP32. Forward and dgrad use MXFP8 weight caches. Custom-autograd regions accept and return BF16 at ordinary model boundaries, while selected internal activations and backward gradients remain in MXFP8. Wgrad results accumulate into FP32 gradient buffers; gradient reduction, clipping, and the optimizer update are also performed in high precision. The next forward pass uses caches rebuilt from the updated FP32 main weights, the loop that Figure 55 isolated.

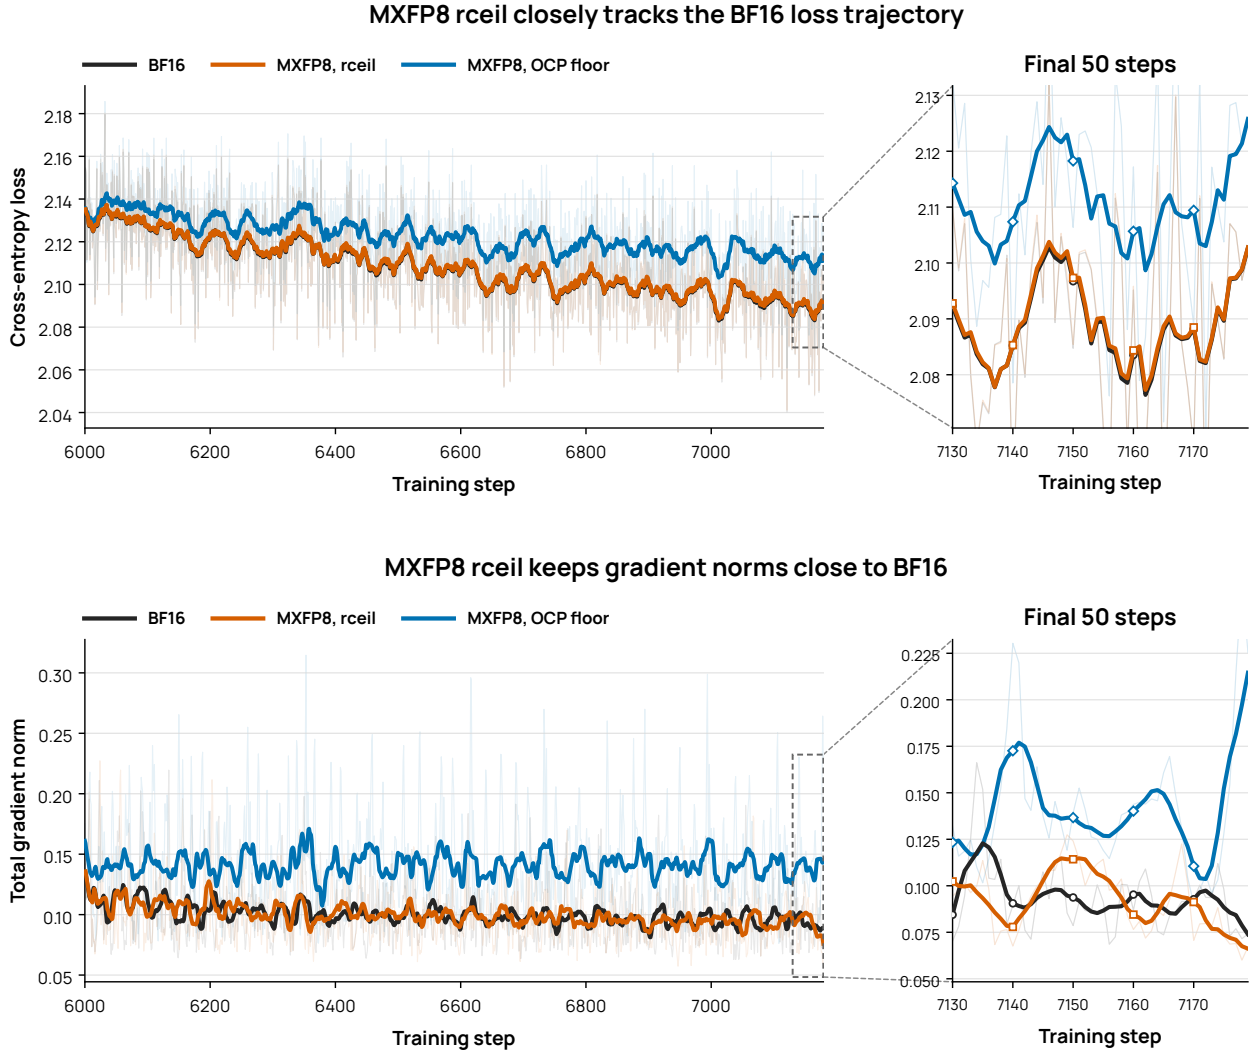


Figure 56 Round-ceiling MXFP8 follows the BF16 training trajectory. The top plot reports cross-entropy loss; the bottom reports total gradient norm. The model has 8.36B active and 166.72B total parameters across 31 layers, with top-4 routing over 128 routed experts and one shared expert. The common step-6000 checkpoint was trained from scratch with MXFP8 OCP-floor scaling on approximately 56B tokens. Step 7179 corresponds to approximately 67B tokens, so the plotted continuation spans approximately 11B tokens. The main panels use a 21-step centered moving average, while the final-50-step panels use a lighter 7-step centered moving average; faint lines show the raw measurements. Over the final 50 steps, `rceil` differs from BF16 by +0.00048 mean loss and -1.9% mean gradient norm, whereas `floor` differs by +0.02200 mean loss and +51.1% mean gradient norm.

11.4.1 Routed Experts

The routed path combines MXFP8 compute with rowwise EP. In forward, the router produces token-expert assignments. Dispatch quantizes each selected BF16 token row into qdata and scales and places those components in the destination expert’s buffers. The up/gate grouped GEMM consumes the dispatched activation and the cached MXFP8 expert weights. A fused SwiGLU-plus-quantization step produces the hidden representation needed by the down projection without requiring a separate BF16-to-MXFP8 pass. The down grouped GEMM then produces a BF16 expert output. That row is quantized for combine transport, and combine reconstructs the route-weighted BF16 token result on the originating rank.

Backward follows the data dependencies in reverse. Combine backward applies the route weights while quantizing the output gradient for transfer to the ranks that hold the selected experts. Dgrad uses the

orientation-specific MXFP8 weight caches. Where two adjacent backward stages inside the fused autograd region agree on layout, their qdata and scales pass directly between those stages, avoiding a DQ–Q cycle. Routed Wgrad currently dequantizes the saved operands and uses BF16 grouped matrix multiplication before accumulating the resulting weight gradient into the high-precision sink. Dispatch backward returns the input gradient to the originating token ranks.

The routed-expert recipe is therefore mixed precision: MXFP8 where scaled GEMM or transport benefits, BF16 at ordinary model interfaces and the current grouped-Wgrad contraction, and FP32 for accumulated gradients, FP32 main weights, and optimizer states.

Figure 57 puts these boundaries into one autograd view. The upper path follows forward execution from dispatch through combine; the lower path follows the corresponding dgrad, Wgrad, and communication work in backward.

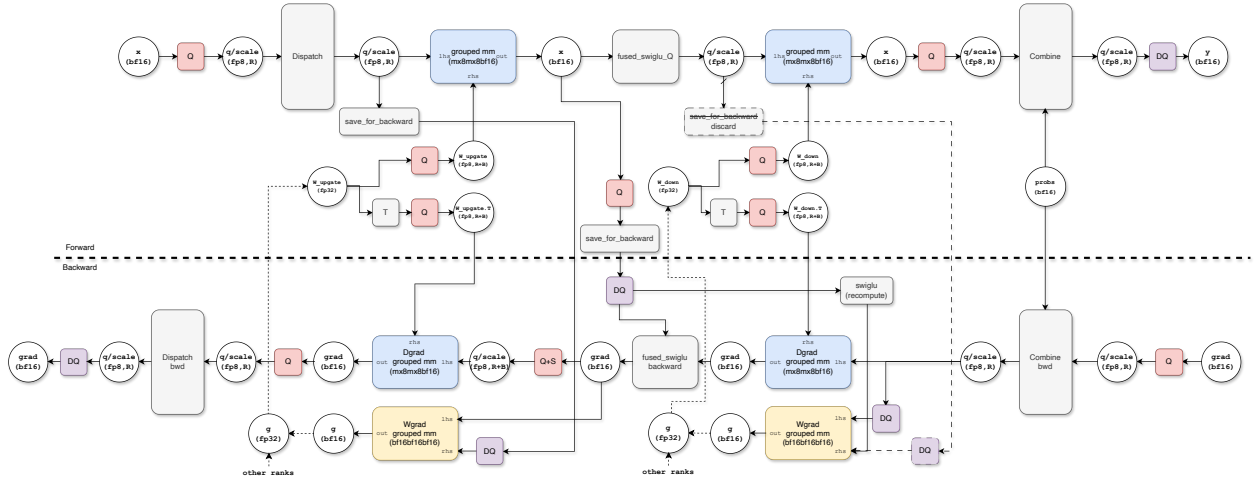


Figure 57 Routed-expert MXFP8 forward and backward. Forward quantizes routed rows for dispatch, applies MXFP8 grouped GEMMs for the up/gate and down projections, and quantizes the combine payload. Backward reverses the communication path, uses MXFP8 weight caches for dgrad, and uses the current BF16 grouped-GEMM path for Wgrad before accumulation into FP32 gradient buffers that are then reduced with the other ranks’ contributions (dashed arrows). The drawing also identifies saved, discarded, recomputed, and dequantized values across the custom-autograd boundary. Notation: (fp8,R) is qdata with rowwise scales; (fp8,R+B) keeps rowwise plus blocked (swizzled) scales; Q, DQ, and T are quantize, dequantize, and transpose; Q+S is a fused quantize-plus-swizzle; mx8mx8bf16 and bf16bf16bf16 name each grouped GEMM’s two input dtypes and output dtype. Weight labels treat W as the right-hand operand (xW), so W and $W.T$ correspond to W^T and W in the notation of the text.

11.4.2 Dense and Shared-Expert Linears

The same cache-and-update scheme applies outside the routed experts. Olmo replaces selected attention projections and shared-expert linears with `MXFP8Linear`. Each weight has forward and dgrad caches derived from its FP32 main weight, and Wgrad is routed to the same high-precision accumulation path used by the DDP optimizer.

The saved-input policy is operator-specific. The packed QKV projection saves its Wgrad input in the MXFP8 RHS layout. The attention output projection keeps its Wgrad input in BF16 because the surrounding attention graph already keeps the relevant BF16 activation alive; adding an MXFP8 copy would not provide the same memory benefit. Attention projections thus use operator-specific compute and saved-activation precision.

Shared experts use the same forward/dgrad cache principle, but their shapes and replica groups follow the shared-expert parameter group rather than the routed-expert group. The recipe evaluated here uses one shared expert with MXFP8-only compute-weight storage, and both shared-expert linears save their Wgrad inputs in MXFP8.

11.4.3 MXFP8 Activation Saving Without MXFP8 Compute

Storage precision and compute precision are independent choices. Olmo’s saved-tensor hooks can pack selected BF16 activations, including the query, key, and value tensors saved for attention backward, into MXFP8 and dequantize them only when backward consumes them. The surrounding forward GEMM does not need to use MXFP8 for this mechanism to reduce saved-activation memory.

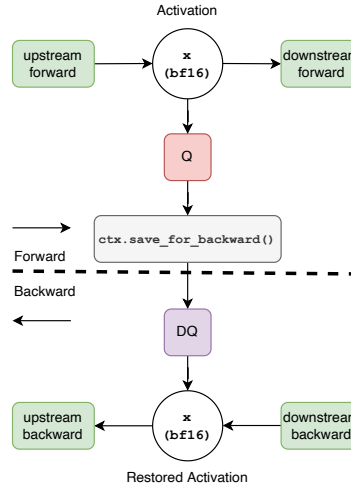


Figure 58 Saving a quantized activation for backward. Forward quantizes the BF16 activation before `save_for_backward`; backward dequantizes it only when a BF16 consumer needs the value. This saves memory only when the quantized representation replaces, rather than supplements, another retained BF16 copy.

This option is profitable only when the packed tensor replaces a BF16 tensor that would otherwise remain live. It also trades Q during forward and DQ during backward for lower peak memory. Storage-only MXFP8 is therefore a configuration choice separate from MXFP8 compute.

11.4.4 Kernel Problems and Fusions

MXFP8 creates useful fusion opportunities because an intermediate often needs to be transformed before its next consumer. The integrated routed path fuses SwiGLU with row quantization, and combine backward fuses route weighting with gradient quantization. Both avoid writing a large BF16 intermediate solely to read it again for Q. Weight caches similarly move weight quantization from the microbatch path to the post-update boundary.

The current recipe transfers qdata and scales separately. Paired or packed qdata-plus-scale transport and direct weighted-quantize-plus-transfer kernels are prototypes outside the evaluated recipe. For routed Wgrad, global DQ followed by BF16 grouped GEMM was faster than the natural MXFP8 contraction on the measured development shapes, whose reduction dimension and scale layout do not align well with the native block-scaled operation. Table 25 summarizes these choices.

11.5 Throughput Benchmark

We compare four modes to separate the attention-projection contribution from the combined MLP-and-EP contribution: a BF16 reference; MXFP8 for the QKV and output projections in attention; MXFP8 for the dense, shared, and routed MLPs together with MXFP8 rowwise EP transport; and the combined recipe.

Figure 59 reports a controlled four-B300 experiment whose configuration is summarized in Table 26. Throughput is total work divided by wall time over the timed window, which avoids both first-use compilation and an average of already-rounded per-step rates.

Quantizing attention projections alone gives a modest benefit at this shape: quantization and layout work offset part of the GEMM savings. The MLP and EP path supplies nearly all of the gain. It accelerates the

Operation	Current path	Reason or alternative
SwiGLU + activation Q	Integrated fusion	Avoid a separate BF16 intermediate and Q pass
Route weighting + gradient Q	Integrated fusion	Avoid a route-expanded BF16 gradient before dispatch
Qdata + scale transport	Separate transfers	Paired and packed transport alternatives are outside the evaluated recipe
Routed grouped Wgrad	DQ, then BF16 grouped GEMM	The natural MXFP8 path was slower on the measured development shapes

Table 25 Current implementation choices and nearby alternatives. “Integrated” identifies the active code path; it does not isolate that fusion’s performance contribution.

Setting	Value
Model	8 layers; 3.172B active and 13.037B total parameters
Experts and routing	32 routed experts, top-4, one shared expert
Hardware and parallelism	Four B300 GPUs, EP = 4
Global step	524,288 tokens in eight gradient-accumulation microbatches
Matched across modes	Fixed-seed initialization and initialized weights, generated input batches, routing decisions, fused attention implementation, optimizer precision, compilation, and recompute policy
Timing window	Steps 1–14 untimed; throughput from total work and wall time over steps 15–24
Repetitions	Three fresh distributed jobs per mode

Table 26 Configuration of the four-mode MXFP8 recipe benchmark. The four modes differ only in where MXFP8 is applied: nowhere (BF16 reference), attention projections, MLPs plus rowwise EP transport, or both.

large dense and expert GEMMs and cuts the fixed rowwise EP buffer allocation from 5.00 GiB in BF16 to 2.836 GiB for MXFP8 qdata and scales. Combining both paths gives the highest throughput, about 21% above the BF16 reference, and the lowest peak active memory.

The rank-0 profiles in Figure 59(a,b) support this attribution. The three families MXFP8 targets account for 65% of BF16 kernel time and fall by a quarter to a half once the MLP path is quantized, while the added conversion work costs a tenth of BF16 kernel time. The untargeted families contribute a much smaller share of the reduction.

These short performance runs verify the systems comparison, not long-horizon training quality. Their first logged loss is identical and their first gradient norms are close under the matched initialization, while the longer continuation experiment in Section 11.3.5 provides the training-trajectory evidence for the selected scale recipe.

Section takeaway. MXFP8’s compute, activation-memory, and communication benefits depend on the cost of Q/DQ, scale layout, cache refresh, and the autograd interface that carries qdata and scales together. Olmo keeps one FP32 main weight authoritative and treats every MXFP8 representation as a derived cache or payload, so persistent training-state memory does not shrink. In the measured four-mode ablation, the MLP and expert-transport path supplies nearly all of the end-to-end throughput gain, and the combined recipe also lowers peak active memory.

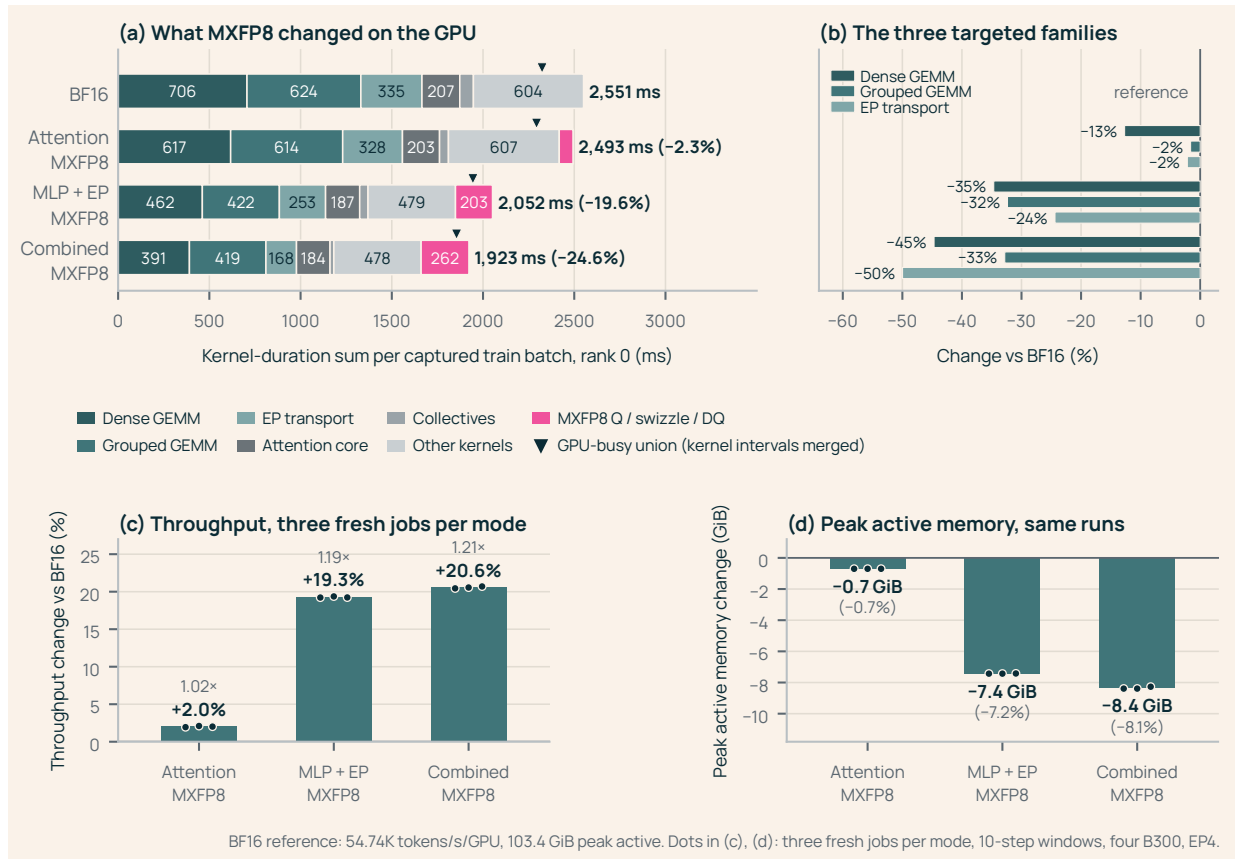


Figure 59 Kernel-time breakdown, throughput, and memory across the four MXFP8 modes. The combined recipe reduces the rank-0 kernel-duration sum by a quarter. Panels (a,b) use profiled kernel durations to identify changed work; panel (c) uses unprofiled runs for throughput because tracing perturbs the launch-heavy combined path. (a) Kernel-duration sums per captured train batch on rank 0 by kernel family, means of three captured batches per mode. Teal families are the ones MXFP8 targets, gray families are not targeted, and pink is the added quantization, scale-swizzle, and dequantization work (75.5, 203.1, and 262.1 ms per batch; 3.0%, 8.0%, and 10.3% of the BF16 sum). Family sums overlap across streams and are not an additive wall-time model; the triangle marks the union of kernel-busy intervals, which shrinks by 1.3%, 16.3%, and 20.2%. (b) Change of the three targeted families relative to BF16; the bars in each row are, top to bottom, dense GEMM, grouped GEMM, and EP transport, in the colors of (a). The EP-transport family includes barrier kernels; the payload-moving kernels alone fall by 41% in both the MLP+EP and combined modes, so part of the combined -50% is reduced waiting. (c) Throughput change over three fresh distributed jobs per mode; bars are means of the three ten-step windows and dots are the repetitions. The BF16 reference is 54.74K tokens/s/GPU and the largest sample standard deviation is 0.14K, smaller than the dot markers. (d) Peak active memory change in the same runs from the 103.40 GiB BF16 reference. Four B300 GPUs, EP = 4, uniform routing, and identical initialized weights, inputs, and routing in every mode (Table 26); these are systems measurements at one operating point, not training-quality evidence (Section 11.3.5).

12 Topology-Agnostic Checkpoint Saving and Loading

Checkpoint tensors are independent of rank placement. A checkpoint should identify the model and optimizer tensors required to resume a particular training step, without requiring the next run to use the same rank layout. Topology-independent checkpoint tensors and load-time resharding are also explicit goals of Universal Checkpointing and PyTorch Distributed Checkpoint (Lian et al., 2025; PyTorch Contributors, 2026g). Olmo saves FP32 main weights, FP32 optimizer states, and the small amount of optimizer and trainer metadata needed to continue the run. In MoE, dense tensors are sharded over DP, expert tensors over EP-MP and EP-DP, and layers over PP. Changing those degrees changes which slice each rank holds, not the underlying tensor values.

Saved item	Format	Size	166.7B example (GiB)	What it restores
FP32 main weights	FP32	$4P$ bytes	621.10	The authoritative parameter values updated by the optimizer.
FP32 first moment	FP32	$4P$ bytes	621.10	Adam’s exponential moving average of gradients.
FP32 second moment	FP32	$4P$ bytes	621.10	Adam’s exponential moving average of squared gradients.
Optimizer bookkeeping	FP32 scalars	Negligible	< 0.04	Per-parameter step counters and rolling windows of recent losses and gradient norms.
Trainer and run metadata	Mixed	Negligible	< 0.04	Step, token and epoch counters; data-loader position; random-number-generator state; callbacks; configuration; and data manifest.
Total		$\approx 12P$ bytes	1,863.33 predicted 1,863.29	BF16 compute weights and MXFP8 compute-weight caches are reconstructed after loading.

Table 27 Contents of a training checkpoint. Here P is the total parameter count. The $12P$ term dominates because the checkpoint contains one FP32 main-weight array and two FP32 Adam-moment arrays. The example column is the step-10,000 checkpoint of the 31-layer, 8.36B-active/166.72B-total MoE configuration studied in Section 11.3.5; the predicted value is three times the FP32 array size, and the two negligible categories together with distributed-checkpoint metadata fill the remainder.

In Table 27, the complete 166.7B-parameter checkpoint occupies **1,863.33 GiB** by file size, within 0.04 GiB of three times its FP32 array size. All remaining checkpoint contents fit in that difference. Topology changes alter the files and chunks written by each rank, but not the dominant $12P$ payload.

12.1 Checkpoint Tensors Are Topology-Independent

Olmo identifies each global checkpoint tensor by a **stable key**, global shape, dtype, tensor role (for example, main weight or optimizer moment), canonical element order, and offsets within the global tensor. The physical checkpoint files may still contain chunks shaped by the save topology; topology independence comes from describing where those chunks belong in the global tensor. For example, changing from EP8 to EP4 changes the number of experts held by each EP-MP rank, not the expert identities or their order. FP32 main weights and optimizer states are persisted, while BF16 compute weights, MXFP8 compute-weight caches, communication buffers, and process groups are derived for the active run.

12.2 Low-Memory Online Conversion

During saving, dense tensors are already exposed in their checkpoint DTensor layouts (PyTorch Contributors, 2026c). Expert tensors use a **checkpoint-only flat view** that orders the local EP-MP expert shards and records EP-DP sharding or replication. In the normal path this view aliases the live optimizer storage. The distributed checkpoint writer serializes each rank’s local chunks and their global coordinates without first gathering the complete expert tensor on GPU. PP contributes globally named layer keys from each stage rather than encoding PP rank IDs in those keys. In one controlled FP8 development run, save-time peak allocated and reserved memory remained at their pre-save values of 93.1 and 121.4 GiB; this is a save-side measurement only.

During loading, the destination run first constructs the shards required by its requested topology (PyTorch Contributors, 2026g). The reader stages saved chunks on CPU, copies the intersections needed by those targets, and restores the FP32 main weights maintained by the distributed optimizer. A direct training load then reconstructs the BF16 compute weights and MXFP8 compute-weight caches.

12.3 Topology Changes and Model Conversion

Topology-agnostic loading changes placement, not the model schema. The source and destination must agree on parameter names, shapes, tensor roles, and canonical ordering. Changing DP, EP, EP-DP, or PP is a **topology change** that redistributes those same global tensors; changing the number of experts, hidden width, or layer structure is a **model conversion**.

As a result, one checkpoint can resume or resize an experiment under a different DP, EP, or PP layout, and it can be inspected or converted without a separate full-checkpoint GPU conversion job.

13 Activation Recompute

Recompute converts retained-activation memory into repeated forward computation. Persistent training state—parameters, gradient buffers, and optimizer states—is fixed by the model and its sharding (Sections 4 and 12). Saved activations behave differently: they grow with the rank microbatch, the sequence length, and the number of blocks whose backward has not yet run, and they dominate the transient part of peak memory. Activation checkpointing reduces this component by retaining a checkpoint region’s boundary input instead of all of its internal forward activations (Chen et al., 2016). Before the region’s backward computation, the forward operations are recomputed to regenerate the values that backward needs. Figure 60 shows this trade for a mixed four-layer example.

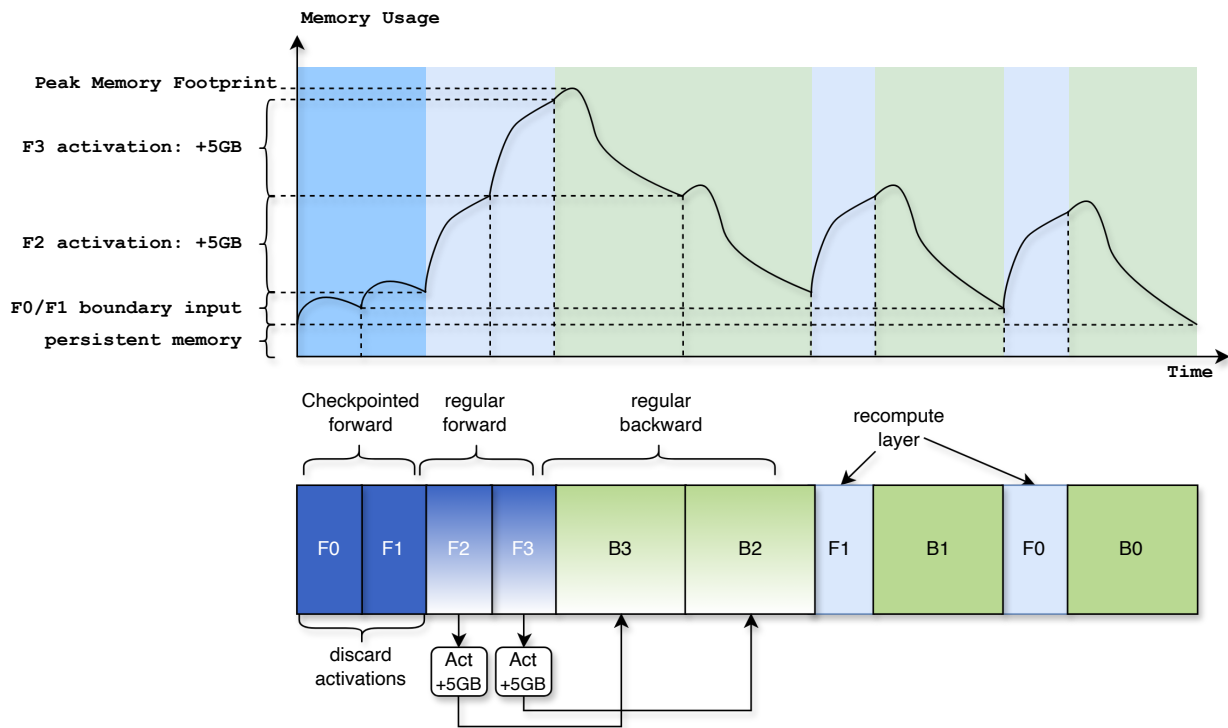


Figure 60 Layer recompute trades additional forward work for lower activation memory. In this illustrative schedule, F0 and F1 are checkpointed, whereas F2 and F3 retain their backward-needed activations. Checkpointing discards F0/F1’s internal activations but retains their boundary inputs; the two forwards are therefore recomputed immediately before B1 and B0. The 5 GB increments and smooth memory curve illustrate the accounting and are not measurements from a training run.

The amount of recomputation also depends on the checkpoint implementation. PyTorch’s non-reentrant variant stops recomputing once it has regenerated every tensor needed by the pending backward computation, rather than necessarily executing the entire checkpointed region again (PyTorch Contributors, 2026e). Figure 61 illustrates this early-stop behavior.

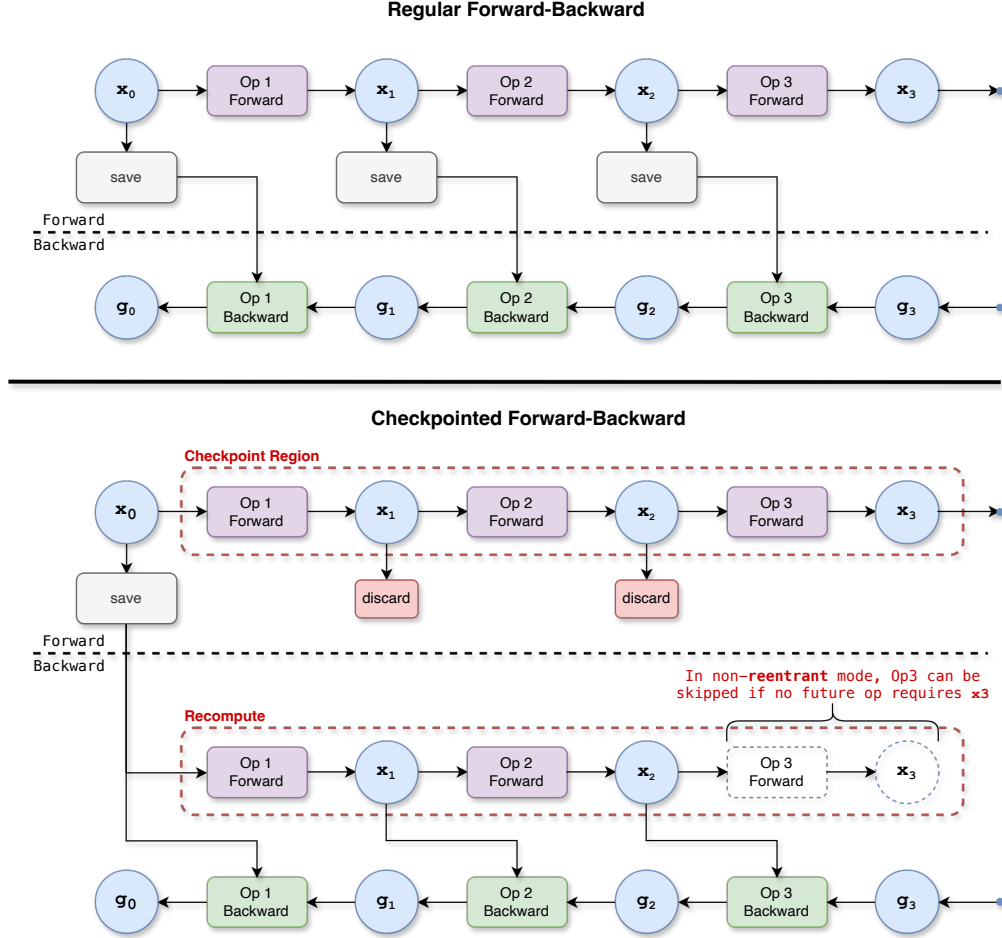


Figure 61 Non-reentrant checkpointing can stop recomputation early. A regular forward saves the intermediate values required by each backward operator. A checkpointed forward instead retains the region input x_0 and discards x_1 and x_2 . During backward, the region is recomputed until those required values have been regenerated. In this simplified example, Op 3’s forward need not be recomputed because Op 3 backward requires x_2 , while the original checkpoint output x_3 remains available to downstream computation. The general stopping condition is determined by backward’s tensor requirements, not merely by the position of an operator in the region.

13.1 Choosing Recompute Granularity

The choice of checkpoint region determines which activations are retained and which operations repeat (Korthikanti et al., 2023; Jain et al., 2020). The DDP training stack selects among block-level and sub-block regions through its model configuration, summarized in Table 28. Per-block recompute, which the production recipes call per-layer recompute, wraps every transformer block, so backward holds only one block’s regenerated activations at a time. Chunk recompute instead wraps the entire block stack in a single region: only the embedding output is retained, and the stack recomputes from that boundary during backward. Selected-block recompute wraps only blocks named by key, and two sub-block options wrap the attention region or the routed-expert compute and unpermute region inside an otherwise unwrapped block. The stack accepts one block-level policy at a time, and TBO (Section 15.3) rejects configurations that enable per-block recompute.

Recomputation must be deterministic to be correct. The wrappers do not snapshot random-number-generator state: the DDP block rejects dropout by construction, and router jitter is disabled in every recipe in this report, so a recomputed forward is a pure function of the retained boundary input. The DeepEP v2 path was additionally validated with the reentrant checkpoint variant under compilation, which always recomputes the complete region.

Policy	Checkpointed region	Retained at the boundary
Per-block	Every transformer block	Each block’s input; used by the measured endpoint below and, per layer, by the Ultra production recipe of Section 14
Chunk	The whole block stack as one region	Only the embedding output; maximal recomputation for minimal retention
Selected blocks	Blocks named by key	The named blocks’ inputs; other blocks save normally
Attention region	The attention sub-region of a block	The sub-region input; expert compute and EP transport save normally
MoE expert region	The routed-expert compute and the unpermute that follow dispatch, on the block all-to-all EP path	The permuted expert input; dispatch and combine transport save normally

Table 28 Block-level and sub-block recompute policies of the DDP stack. All regions use PyTorch’s non-reentrant checkpoint, so the early-stop behavior of Figure 61 applies inside each region. Appendix A.14 separately describes the base transformer’s alternatives outside the DDP stack.

13.2 Recomputing a Routed Block Repeats Its Communication

For a dense block, recomputation repeats local compute. For a routed block, the checkpointed region contains the router, dispatch, expert compute, and combine, so recomputation also **re-executes the expert-parallel communication** during backward. The recomputed forward reproduces the same scores and the same top- K routes from the same boundary input, so the re-executed dispatch moves the same rows to the same destination ranks. The memory–time trade for a routed block therefore counts repeated transport, not only repeated FLOPs, and the measured cost below includes both.

Checkpointing also changes the rowwise path’s buffer policy. The lease system of Section 5.7 exists to keep a symmetric-memory payload alive from forward to its backward consumer. Under a checkpointed forward, the first pass discards its intermediates, and the recompute pass regenerates payloads immediately before they are consumed. The rowwise path therefore detects that it is running inside a checkpoint region and switches from leased symmetric buffers to per-call scratch buffers for combine outputs, rather than holding pool blocks whose saved contents no backward will read.

Metrics are accumulated only once. Router statistics, load-balancing metrics, and auxiliary-loss accumulators are forward side effects, and a recomputed forward would count every routed microbatch twice. The checkpoint context therefore distinguishes the original forward from recomputation, and the router and rowwise paths accumulate metrics and auxiliary-loss statistics **only in the original pass**. This keeps the balance-scope accounting of Section 10 intact under any recompute policy.

One recompute mechanism in the router is independent of block policy. The router computes its logits from an FP32 cast of the block’s BF16 activation. Saving that cast would retain a four-byte copy of every routed token solely for the router linear’s backward, so the router materializes the FP32 input through an **output-discard checkpoint**: the storage is released after the logits are produced and regenerated immediately before the router linear’s backward consumes it. The BF16 activation remains the only persistent copy.

13.3 Composition with Pipeline Schedules

In the pipeline schedules of Section 6, a stage retains activations for every in-flight microbatch, so its activation footprint is **the product of the in-flight count and the per-microbatch footprint**. Recompute shrinks the second factor: a stage that checkpoints its blocks holds boundary inputs for each in-flight microbatch instead of full activation sets, at the cost of recomputing those blocks inside the backward phase of the schedule. This is the regime in which the production Ultra operating points run: at 58B active parameters with PP8, the recipe of Section 14 combines MXFP8 with per-layer recompute to stay within the memory budget. Recomputation can also repeat communication: regenerating the needed activations may require rerunning


collectives, such as context-parallel attention or a routed block’s dispatch and combine. Sub-block policies can keep these operations outside the recomputed region.

13.4 Measured Memory–Throughput Trade-Off

We measured full per-block recompute in a matched four-GPU training run whose configuration is summarized in Table 29. Throughput is total useful tokens divided by total elapsed time over the timed window, repeated in three fresh processes with the execution order balanced across variants.

Setting	Value
Model	One dense block followed by seven MoE blocks; $d_{\text{model}} = 4096$; expert hidden size 4096
Experts and routing	32 routed experts, top-4, one shared expert; uniform routes and zero token drops
Hardware and parallelism	Four B300 GPUs, EP = 4
Batch	Two 8192-token sequences per rank microbatch; 524,288 tokens per optimizer step
Matched across variants	BF16 execution, identical normally initialized weights, identical input batches
Timing window	Steps 1–14 untimed (compilation and caches); throughput over steps 15–24
Repetitions	Three fresh processes per variant

Table 29 Configuration of the per-block recompute benchmark. The two variants differ only in whether every transformer block is wrapped in a non-reentrant checkpoint region.

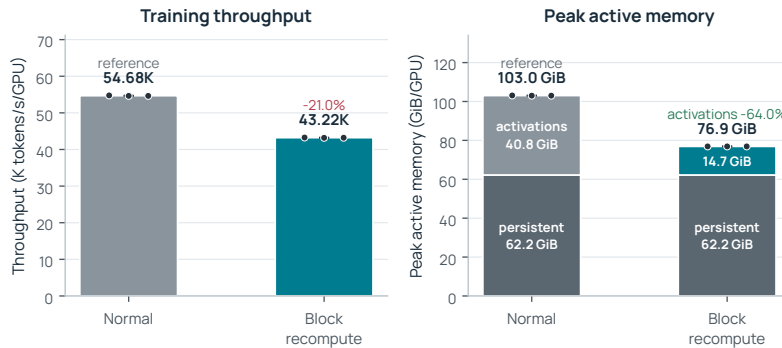

Bars: arithmetic means · dots: three independent 10-step windows · whiskers: ± 1 sample SD (smaller than the dots here) · lower segment: persistent memory resident between steps

Figure 62 Block recompute removes nearly two thirds of activation memory at a one-fifth throughput cost in this matched configuration. Bars show the arithmetic mean of three fresh-process repetitions; dots show the individual ten-step windows, and the sample standard deviations are smaller than the dot markers. Normal training in this campaign sustains 54.68K tokens/s/GPU at 103.03 GiB peak active memory; recomputing every transformer block sustains 43.22K tokens/s/GPU at 76.90 GiB, 20.95% lower throughput for 26.13 GiB (25.36%) less peak memory. The lower segment of each memory bar, labeled “persistent”, is the memory resident between steps (parameters, gradient buffers, optimizer states, and persistent buffers), 62.21 GiB in both modes; the reduction therefore falls entirely on the transient activation part, which shrinks from 40.82 to 14.69 GiB. Measurements use four NVIDIA B300 GPUs and the fixed model, batch, routing, and timing protocol described in the text.

The saving comes entirely out of activations. Persistent state—the parameters, gradient buffers, optimizer states, and persistent buffers resident between steps—is identical in both variants, so the 26.13 GiB reduction removes nearly two thirds of the transient part of the peak.

The profile shows which work repeats. A normal `train_batch` contains 64 projected block-forward ranges: eight blocks across eight rank-local microbatches. Per-block recompute raises that count to 128 because each block forward is recomputed during backward, and for the seven routed blocks each recomputation includes dispatch and combine. The summed GEMM and attention kernel duration rises by 24.8%, while the projected rank-0 GPU span rises by 26.7%, closely matching the independently measured 26.5% increase in time per unit of useful work. These duration sums are work indicators rather than an additive wall-time decomposition because kernels on different streams can overlap.

Full per-block recompute is useful when the 26.13 GiB reduction enables a larger microbatch, a deeper pipeline stage, or a model that would otherwise not fit, and this is how the Ultra production recipe uses it. When memory already fits, the measured 20.95% throughput cost favors retaining activations or selecting a narrower checkpoint region from Table 28. The report makes no timing claim for the chunk, selected-block, or sub-block policies; their checkpoint mechanism is the same, but their region boundaries and retained inputs differ.

13.5 Choosing a Recompute Policy

Transient memory can also be reduced through microbatch size and activation precision. A smaller rank microbatch reduces every saved activation at once but pushes grouped GEMMs toward the throughput crossover of Section 9, since fewer rows reach each expert. MXFP8 activation saving (Section 11) stores selected saved activations as qdata and scales instead of BF16, shrinking them without repeating any forward work. Recompute removes saved activations entirely, at the price of the recomputed region’s forward time. The Ultra recipe of Section 14 combines MXFP8 compute with per-layer recompute to keep the model within device memory.

Choosing a region starts with how much memory must be freed and which operations would repeat. A useful starting point is the smallest region that meets the memory budget, preferably excluding expert-parallel transport. The sub-block regions of Table 28 repeat attention or the routed-expert compute and unpermute, and neither repeats expert-parallel transport. Selected blocks cover a moderate shortfall at a cost proportional to the share of blocks named. Per-block recompute can accommodate a deep pipeline stage with many in-flight microbatches, at about a quarter more time per unit of useful work in this shape. Chunk recompute, which retains only the embedding output, remains for models that do not fit even with per-block boundary inputs.

Section takeaway. Checkpoint-region selection determines both memory savings and repeated work. For a complete routed block, that work includes dispatch and combine; metrics, however, are accumulated only on the original forward. At the measured operating point, per-block recompute removes nearly two thirds of activation memory, or one quarter of the peak, at a one-fifth throughput cost. The Ultra recipes accept this cost because the model otherwise exceeds the memory budget.

14 Production Training Throughput

The preceding sections measured individual mechanisms and controlled combinations. Here we report **complete training configurations**, from Tiny to Ultra, with their model scale, batch, topology, precision, recompute policy, and useful-model TFLOP/s/GPU. These runs establish feasible operating points; their different configurations limit comparisons between them.

14.1 Production Run Matrix

The headline runs use random routing. Random routing removes the changing expert-load distribution of a learned router and gives a quickly stable reference for the training system. It does not measure model quality or the throughput ultimately reached by a learned router, so every row in Table 30 is labeled as a systems reference rather than a time-to-quality result. All runs use sequence length 8192, top-4 routing, one shared expert, NVIDIA B300 GPUs, and eight GPUs per node. Tiny uses 16 GPUs, Small and Medium use 128, and Large and Ultra use 512.

Each run contributes a representative rate read from its throughput curve, and we select the **highest observed rate** across each configuration’s runs. Some configurations were launched more than once; environmental problems were suspected in the lower-rate repeats, but their causes were not established. These readings are neither repetition averages nor estimates of the hardware ceiling, and they do not come from one synchronized timing window.

We report **BF16-reference MFU** (Equation 95), using the B300’s dense BF16 peak of 2,250 TFLOP/s/GPU (NVIDIA, 2026r). These percentages are derived from the throughput readings, not separately measured. We keep the same denominator for MXFP8, whose execution mixes precisions; its percentage is therefore a BF16 reference, not utilization of the FP8 peak. The table also gives the parameter activation ratio $\alpha_P = P_{\text{active}}/P_{\text{total}}$ defined in Equation 3.

These measurements use an eight-GPU NVLink domain. Each node provides one eight-GPU NVLink domain; communication beyond those eight GPUs crosses the inter-node fabric (Section 7.4). The Megatron-Core MoE report evaluates GB200 on NVL72, where a much larger EP group can remain inside one NVLink domain. It also reports GB300 NVL results, but does not specify a 72-GPU domain for those measurements (Yan et al., 2026). Some of its reported per-GPU throughput values are higher than ours, but the different NVLink domain, model, batch, topology, and software recipe prevent an apples-to-apples framework comparison.

Operating point	Active @ total Parameter activation	GBS	EP / PP	Precision	Recompute	TFLOP/s/GPU MFU (BF16 ref.)
Tiny-64E	1.59B @ 12.91B $\alpha_P = 12.3\%$	8 Mi	1 / 1	BF16	No	903 40.1%
Small-64E	4.29B @ 40.86B $\alpha_P = 10.5\%$	24 Mi	8 / 1	BF16	No	841 37.4%
Medium-64E	7.37B @ 70.22B $\alpha_P = 10.5\%$	16 Mi	8 / 2	BF16	No	853 37.9%
Medium-96E	7.38B @ 103.75B $\alpha_P = 7.11\%$	24 Mi	8 / 2	BF16	No	855 38.0%
Medium-128E	7.38B @ 137.27B $\alpha_P = 5.38\%$	24 Mi	8 / 4	BF16	No	843 37.5%
Large-128E	15.14B @ 295.99B $\alpha_P = 5.12\%$	32 Mi	8 / 4	BF16	No	768 34.1%
Ultra-128E	58.36B @ 1.200T $\alpha_P = 4.86\%$	64 Mi	8 / 8	MXFP8	Yes	858 38.1%
Ultra-256E	58.41B @ 2.380T $\alpha_P = 2.45\%$	64 Mi	32 / 8	MXFP8	Yes	689[‡] 30.6%

Table 30 Headline random-routing throughput. GBS is the global batch size in binary millions of tokens (1 Mi = 2^{20}). EP and PP are expert- and pipeline-parallel degrees. Each parameter cell gives active and total counts, then their ratio α_P ; each throughput cell gives useful active-model TFLOP/s/GPU, then MFU normalized to the dense BF16 peak of 2,250 TFLOP/s/GPU. This common reference also applies to MXFP8 and does not measure FP8-peak utilization. These unmatched operating points differ in model shape, batch, topology, and precision and therefore do not form a controlled scaling curve. [‡]The 2.380T Ultra-256E run used EP32 with the DeepEP v2 path; its value is the best observed in a nine-step run whose curve had not stabilized. Full configurations and run provenance appear in Appendix B.10.

14.2 Throughput Across Model Sizes

Stored expert capacity grows faster than active compute. The three Medium configurations hold active parameters nearly constant while increasing total capacity from 70.22B to 137.27B. Their selected observed throughputs remain in a narrow 843–855 TFLOP/s/GPU band, but their global batches and PP degrees are not all matched. The result shows feasible operating points at each capacity; it does not isolate the cost of adding experts.

Learned routing runs below the random reference. The learned-routing companions in Appendix B.10 show a gap of about one percent at Tiny without EP, and about nine percent at Small with EP8, where a learned router’s changing expert loads reduce throughput. These companions show how optimistic the random-routing reference can be; Section 10 examines the associated load imbalance.

Memory capacity limits the largest operating points. Large-128E runs at the smallest rank micro-batch of any BF16 operating point in the matrix, a choice made under memory pressure. At Ultra scale,

MXFP8 is as much a capacity strategy as a compute format, and the recipe still requires per-layer recomputation (Section 13). Recomputing those activations adds forward work, so despite MXFP8, Ultra-128E’s 858 TFLOP/s/GPU stays close to the smaller BF16 points. Its 64-Mi-token global batch and PP8 topology also differ from Large-128E’s 32-Mi-token batch and PP4 topology, preventing a precision-only comparison. Ultra-256E further changes EP from 8 to 32 and uses the DeepEP v2 path; its nine measured steps establish only that the configuration ran at the reported rate during a short, still-changing window.

Across these configurations, the stack supports 12.9 billion to 1.2 trillion total parameters, with the 2.38-trillion-parameter extension demonstrated in the short run described above.

15 Optimization Attempts and Lessons

We also tested approaches that we did not adopt in the training recipes. They targeted saved activations, exposed communication, conversion kernels, host launch overhead, and the number of separate kernels in the MoE path. In several cases, reducing one cost increased another: offload exceeded the host-link bandwidth budget, overlap slowed concurrent kernels, and preserving the natural MXFP8 layout made Wgrad slower. Other attempts required more integration work than their prototypes justified. CUDA Graph replay needed pipeline-aware activation storage, while the megakernel needed a complete distributed training runtime.

Two-batch overlap gave a small gain that did not justify the added coordination. Table 31 summarizes the decisions.

Direction	Intended benefit	Why it was not adopted	Limiting requirement
CPU activation offload	Lower saved-activation memory	The GPU produces activation bytes about six times faster than PCIe can move them to and from host memory; pinned host memory and prefetch scheduling add substantial machinery.	Host bandwidth or compression sufficient to match activation production.
Wave overlap	Hide dispatch and combine under expert compute	Waves reduce expert-GEMM size, while concurrent GPU communication stretches both the communication and GEMM regions on many tested shapes.	Enough hidden communication to offset smaller GEMMs and concurrent-kernel slowdown.
Two-batch overlap	Pipeline two half-batches through adjacent MoE blocks	The rowwise NVSHMEM kernels and the other lane’s compute compete for the same GPU resources; the extra lane also increases host scheduling.	Lower communication interference or less host work through replay.
MegaMoE megakernel	Coordinate communication and expert compute inside persistent CUDA kernels	The kernel grew into a distributed training-runtime project before it had a production backward and inter-node path.	Production-shaped forward scheduling, full backward, and inter-node transport.
Natural-layout MXFP8 Wgrad	Eliminate global dequantization before Wgrad	The naturally produced scales do not match Wgrad’s reduction layout; the prototype lost to global dequantization plus tuned BF16 grouped GEMM.	Wgrad-oriented requantization plus native block-scaled GEMM faster than the converted path.
Static CUDA Graphs	Remove repeated host launch work	Stable graph addresses conflict with several live pipeline microbatches; safe staging adds copies and memory.	Schedule-indexed saved-context storage with replay savings that exceed staging and retention costs.

Table 31 Optimization attempts and reasons for not adopting them. The last column identifies the bandwidth, execution, or storage requirement that limited each tested approach.

15.1 CPU Activation Offload Was Limited by PCIe

CPU activation offload exchanges GPU memory for host-link traffic. After a forward layer produces tensors that autograd will need later, the runtime copies selected tensors from device to host (D2H), releases their GPU storage, and copies them back from host to device (H2D) before the corresponding backward operation. Every offloaded byte therefore crosses the host link twice over one training step. Overlap can hide these copies only if the link drains tensors at least as quickly as the forward pass produces them and returns them within the backward prefetch window. Activation offload follows a line of work exemplified by vDNN (Rhu et al., 2016); the decision here concerns its service-rate balance on the measured Olmo workload.

Let A be the selected activation bytes produced during one layer interval, t_f the corresponding forward production interval, and t_b the usable backward prefetch interval. If B_{D2H} and B_{H2D} are the sustained pinned-memory bandwidths, necessary service-rate conditions are

$$B_{D2H} \geq \frac{A}{t_f}, \quad B_{H2D} \geq \frac{A}{t_b}. \quad (61)$$

When A/t_f exceeds B_{D2H} , each layer produces a larger copy backlog than PCIe can retire. Moving the copy earlier cannot remove that backlog, even on a separate CUDA stream; it only changes where the eventual wait appears. We write the required-to-available D2H bandwidth ratio as $\rho = (A/t_f)/B_{D2H}$.

Table 32 works the inequality for the routed block of the four-B300 benchmark of Section 13, using that profile’s GPU-projected layer timings and an activation inventory implied by the block’s autograd graph at its shape ($T = 16,384$ tokens per rank microbatch, $d = h = 4096$, top-4 routing, one shared expert, BF16). The inventory counts valid routed rows only. As an aggregate consistency check, the inventory summed over the seven routed blocks, the dense block, and the output logits is within a few percent of the measured 40.8 GiB transient peak. The logits are not offload candidates, so the table’s whole-microbatch traffic excludes them.

One routed block, one rank microbatch	Size	Value
Saved activations multiples of $T \times d$ BF16 elements		
Attention: block input, normed input, grouped-query attention $q/k/v$, attention output	$4.5Td$	0.60 GB
MoE norm inputs: residual and normed	$2Td$	0.27 GB
Routed experts: received rows, up/gate output, SwiGLU output, expert outputs ($K = 4$)	$20Td$	2.68 GB
Shared expert: up/gate output, SwiGLU output	$3Td$	0.40 GB
Candidate bytes A	$29.5Td$	3.96 GB
Timing GPU-projected ranges of the Section 13 profile		
Forward of one routed block, t_f		10.3 ms
Backward of one routed block, t_b , its share of the 198 ms microbatch backward		22 ms
One microbatch’s share of the step (forward, backward, optimizer)		295 ms
Required versus available GB/s per direction		
Required: D2H during forward, A/t_f		384
Required: H2D before backward, A/t_b		180
Required: averaged over the whole microbatch, 30.6 GB each way		104
Available: PCIe Gen5 x16, specification		63
Available: pinned copy, one GPU alone, measured on a Gen5 host		53
Required over available, $\rho = (A/t_f)/B_{D2H}$, specification link		6.1
Selective offload bound, $f \leq 1/\rho$		$\approx 1/6$

Table 32 The estimated activation-offload rate exceeds PCIe bandwidth by six to seven times for one GPU. GB is 10^9 bytes. The inventory is analytic (saved tensors implied by the block’s autograd graph, uniform routing, valid rows only); the timings are the Section 13 profile on B300 GPUs; the link rates are the PCIe Gen5 x16 specification and pinned-memory copies measured on an H100 host with the same link generation. Against the measured 53 GB/s copy rate rather than the specification, ρ rises to 7.2. The B300 host link itself was not measured.

A routed block produces its 3.96 GB of candidate activations in 10.3 ms, a 384 GB/s stream, against a 63 GB/s link, so $\rho \approx 6$ with the link entirely to itself and above 7 at the copy rate actually measured on a host of the same link generation. Even spread over the entire 295 ms microbatch, the traffic is still 104 GB/s in each direction, and the measured copies lose a further 15–25% of their rate when both directions run at once. A node’s eight GPUs offloading together would push about 3 TB/s into host memory, more than a two-socket DDR5 host can absorb regardless of link generation; a PCIe Gen6 host link would halve ρ but leave both the per-GPU forward-rate mismatch and the host-memory limit.

Faster compute further narrows the offload window unless host bandwidth increases with it. The activation-production rate in Table 32 is Blackwell’s, since the block timings come from B300 GPUs, while the link is the same PCIe Gen5 x16 that served Hopper hosts. At Hopper’s roughly $2.3\times$ lower BF16 peak (Table 21), scaling the block time inversely with peak arithmetic throughput would put ρ near 3, still above the available bandwidth. This is an estimate, not a Hopper measurement.

A selective policy can offload at most approximately a fraction $f \leq 1/\rho$ of the candidate bytes without building a sustained D2H backlog. At $\rho \approx 6$ that is about one sixth, roughly 0.65 GB per block or about 5 GB over a microbatch: less than a fifth of what per-block recompute removes at the same operating point (Figure 62), for a new subsystem with its own failure modes. That reduction is too small to justify the subsystem in the current recipe.

15.2 Wave Overlap Was Not a Reliable Win

Wave scheduling divides one MoE invocation into several route groups. While experts compute one wave, another CUDA stream can dispatch a later wave or combine an earlier one. This creates an opportunity to hide communication, but it also replaces one larger grouped GEMM with several smaller grouped GEMMs and runs communication beside compute on the same GPU. Fine-grained overlap systems such as COMET and Lancet show why this direction is attractive (Zhang et al., 2025; Jiang et al., 2024b). Its benefit depends on how much both communication and compute slow down when run together.

The controlled measurements in Section 5.9 show why stream concurrency was not enough. In an isolated two-node EP-MP = 16 experiment, rowwise NVSHMEM dispatch or combine slowed the concurrent expert GEMM by about 23–27% across the tested communication-block sweep. The communication region also stretched. Even a one-block communication kernel did not protect the GEMM; it mainly made communication take longer. A DeepEP v2 sweep found the wave path slower than the no-wave path at the tested communication settings of 4, 6, 16, 32, and 64 SMs on its own two-node EP-MP = 16 shape.

The measurements do not identify the interference mechanism. The rowwise path executes GPU warps that issue one-sided transfers and stream barriers, so candidate causes include SM issue pressure, NVSHMEM progress work, L2 or memory-fabric contention, and barrier overhead. Wave partitioning independently reduces GEMM efficiency. Other measured shapes include both wins and losses, so the result does not show that communication–compute overlap is never useful. Concurrent kernels can still take longer to finish (Lee et al., 2025). For the tested setup, phase-sequential execution is the appropriate reference; the current evidence does not establish that overlap improves the complete forward and backward path.

15.3 Two-Batch Overlap

Two-batch overlap (TBO) applies the overlap idea at a larger granularity. It splits the local microbatch into two half-batch lanes and interleaves their work across adjacent MoE blocks (Figure 63). While one lane runs attention or expert GEMMs, rowwise dispatch or combine for the other lane can remain pending on the EP communication stream. We implemented this BF16 rowwise schedule and tried it during development, but decided not to use it in our current training recipes. DeepEP documents a contrasting legacy TBO path designed around low-interference communication (DeepSeek-AI, 2026).

Figure 64 reports a matched end-to-end comparison using the four-GPU configuration and timing protocol of Section 13: TBO improves throughput by one percent and trims peak active memory by about 1.5 GiB. The figure also draws what ideal overlap would gain. EP transport occupies a seventh of the normal run’s GPU span, so even a scheme that hid every millisecond of it without slowing the compute beside it would

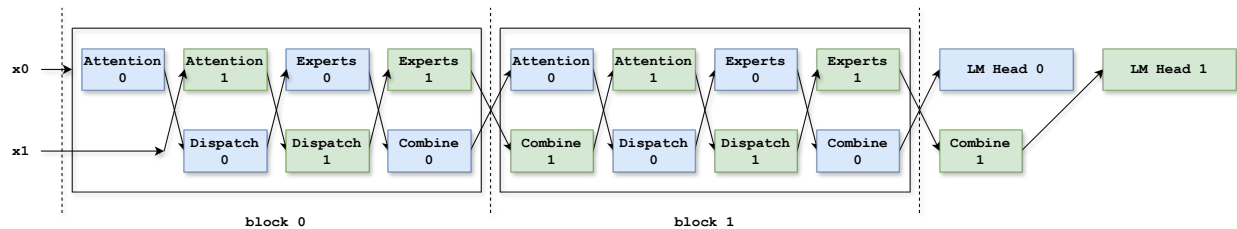


Figure 63 Two-batch overlap interleaves two half-microbatch lanes across adjacent MoE blocks. Blue and green denote lanes 0 and 1. The schedule interleaves attention, expert computation, and expert-parallel dispatch and combine so that communication from one lane can run alongside computation from the other. The arrows show data dependencies; the visual overlap alone does not imply a wall-time speedup.

gain seventeen percent; TBO achieves a one-percent gain. This is a small positive result for one operating point, not evidence that TBO is generally faster.

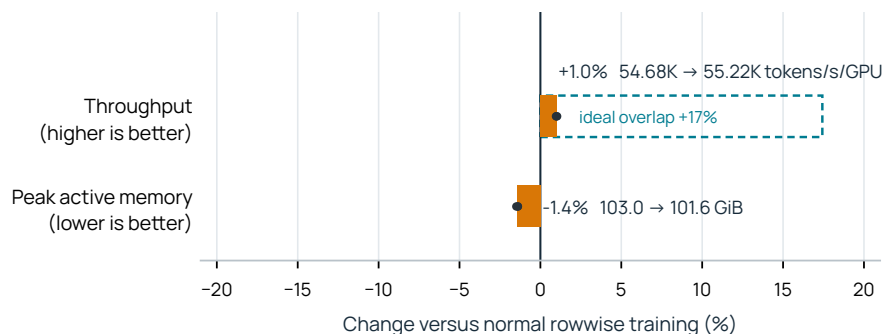


Figure 64 Two-batch overlap improves throughput by 1%, compared with a 17% ideal-overlap estimate. Filled bars show TBO’s change of the three-repetition mean relative to normal rowwise training, with the individual ten-step windows as dots. The dashed outline is ideal overlap, the most any scheme could gain on this workload: EP transport occupies 14.8% of the normal run’s GPU span on rank 0, so hiding all of it with no slowdown of the concurrent compute would raise throughput by 17%. Normal training sustains 54.68K tokens/s/GPU at 103.03 GiB peak active memory; TBO sustains 55.22K at 101.57 GiB. Same four-GPU B300 configuration, matched model, batch, routing, and timing protocol as Figure 62.

Concurrent kernels take longer under TBO. Olmo’s rowwise NVSHMEM communication is not an SM-free direct memory access (DMA) transfer. Its route-level PUT and GET kernels use SM scheduling and memory-system resources also needed by expert GEMMs. In the profile, TBO overlaps 503.6 ms of communication and compute, equal to 72.2% of the EP transport interval. At the same time, the summed EP-transport duration grows by 98.9%, the GEMM duration by 20.4%, and attention duration by 16.5%. These sums combine contention with the lower efficiency of two smaller lane kernels and can overlap with one another; they are not an additive wall-time decomposition. Taking the union of the intervals, the projected GPU span falls by 0.9%, consistent with the independent 1.00% throughput gain. Thus contention is real, but it does not quite erase the overlap benefit in this configuration. NCCL All-to-All can have a different contention profile, but it also retains the packing and unpacking permutations that rowwise EP removes.

Splitting the microbatch roughly doubles the host scheduling work. Each half-batch lane has its own attention, dispatch, expert, combine, and synchronization stages. The profile records 89.8% more kernel launches and 126.4% more CUDA API calls than normal execution. Kernel-idle gaps of at least 10 μ s also become 2.09 $\times$ as frequent, although total idle time within the projected range rises by only 9.7 ms. The CPU remains far enough ahead at this rank-local microbatch size, so launch work does not erase the small win. At smaller microbatches or on a faster kernel path, the same extra submission work moves the system closer to a launch-limited regime. CUDA Graph replay could lower this cost, but the current stack has no stable graph path that captures this schedule end to end.

TBO adds coordination to the pipeline schedule. The implementation carries two live lanes, separate communication buffers, and stream-ordering dependencies across neighboring blocks. Pipeline parallelism (PP) already imposes its own microbatch order and point-to-point dependencies, so combining the two schedules requires additional coordination rather than a local MoE-layer change. The measured one-percent gain came from a no-PP configuration; we did not adopt the additional schedule-dependent coordination for that gain. A different microbatch size, transport, interconnect, or pipeline schedule can change the balance between hidden communication and the costs of contention, smaller kernels, and extra launches.

15.4 The MegaMoE Kernel Became a Runtime Project

To control this interference directly, a persistent MoE kernel can assign explicit roles to communication, scheduling, and tensor-core work. **MegaMoE**, our prototype of such a persistent MoE megakernel, explored this direction by bringing route dispatch, persistent expert scheduling, the two expert linear layers, the activation, and weighted combine under one Olmo-controlled CUDA implementation.

The prototype needed a complete distributed execution path. A usable training backend still needed a production tensor-core and data-movement scheduler, cross-rank signaling, reusable peer workspaces, returned expert outputs, backward for activations and both expert weights, and inter-node transport. These pieces are coupled: a fast local forward body cannot replace the rowwise path if backward or remote movement returns to a separate, incompatible schedule. The prototype grew across Python, C++, CUDA, and distributed-runtime code before it had a production training backward.

We removed that path and kept rowwise EP as the end-to-end baseline. The prototype’s tensor-core body ran as a serialized debug version, so its timing does not estimate the performance of the intended persistent implementation.

15.5 Wgrad Needed a Different Scale Layout

The rowwise MXFP8 forward path naturally represents activations and output gradients with scales $s_A[m, k_b]$ and $s_{dY}[m, n_b]$, where m is a routed-token row and k_b and n_b are feature blocks. Expert weight-gradient computation is

$$dW_e = A_e^T dY_e, \quad (62)$$

so its reduction dimension is the token index m . The natural scale factors therefore change along the Wgrad reduction. Blackwell’s native block-scaled matrix instructions expect scale factors arranged according to their supported GEMM reduction layout; the already-available rowwise representation is not that layout.

The exact-natural prototype handled the mismatch by dequantizing tiles into BF16 shared memory and using BF16 tensor-core arithmetic. Table 33 shows that it was substantially slower than two global dequantization kernels followed by the tuned BF16 grouped Wgrad. Despite doing a separate global conversion, that path benefits from the faster GEMM implementation.

$K = N$	Exact-natural prototype	Global DQ + BF16 grouped Wgrad
2,048	0.380 ms	0.118 ms
4,096	1.449 ms	0.334 ms
8,192	5.522 ms	1.232 ms

Table 33 Preserving the natural MXFP8 scales was slower than converting both operands globally. The B200 prototype used four experts, 256 rows per expert, 1,024 total rows, and BF16 output. This report makes no claim about current-stack Wgrad performance.

The current path therefore dequantizes the saved MXFP8 activation and output gradient, then calls BF16 grouped GEMM for Wgrad. This does not imply that native MXFP8 Wgrad is impossible. Such a path would deliberately requantize or repack the operands into a Wgrad-oriented scale layout before calling a native block-scaled grouped GEMM. Its cost includes that conversion as part of the complete backward region. The

prototype measurements favor the converted layout and tuned BF16 GEMM over directly consuming the forward layout.


15.6 Static CUDA Graphs Need Pipeline-Aware Storage

CUDA Graph replay targets a different cost: repeated host submission. As Section 8 explains, replay can be attractive when the GPU executes small regions faster than Python and the CUDA runtime can submit them. The static PyTorch capture/replay path considered here records a fixed launch sequence with stable tensor addresses, then replays that sequence with much less host work. CUDA also provides graph-update APIs that can change node parameters, including memory addresses; those mechanisms are outside this static prototype (NVIDIA, 2026l; PyTorch Contributors, 2026f).

Host submission can dominate a short operation. In a standalone single-GPU grouped-linear microbenchmark, the captured device sequence for a short MXFP8 expert operation runs more than twice as fast as its BF16 baseline while under ordinary eager submission the same operation is slower than BF16 (Table 48 in Appendix B.6).

Stable graph addresses conflict with live pipeline activations. A pipeline stage can execute several microbatch forward passes before their corresponding backward passes. If every replay of one layer uses the same activation slot, a later forward overwrites data that an earlier backward will read. A pipeline-compatible design can assign a graph runner and static activation slot to every simultaneously live (layer, microbatch) interval, or capture a larger fixed schedule containing the forward-backward reuse order. Separate slots increase graph pools and retained activation memory. Copying live tensors into graph-owned staging storage stabilizes their addresses but adds device-to-device copies. Staging, graph-pool memory, activation retention, and capture cost all count against replay savings. Figure 65 illustrates the separate-slot design with three in-flight microbatches.

(a) No pipeline: each microbatch finishes before the next starts

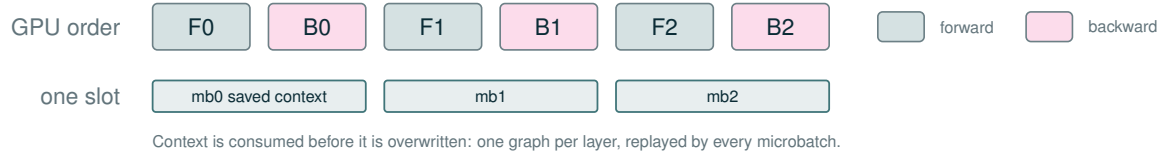

(b) Pipeline stage with three microbatches in flight (1F1B)

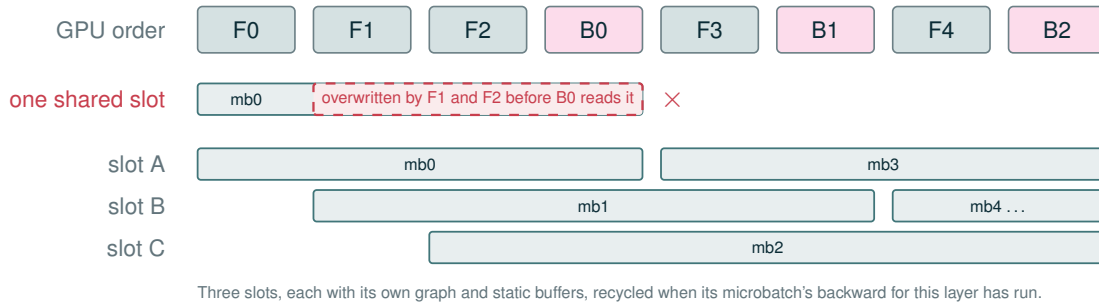


Figure 65 Under a pipeline schedule, static per-layer replay needs one saved-context slot per in-flight microbatch. (a) Without a pipeline the backward of each microbatch consumes the layer’s saved context before the next forward overwrites it, so one graph per layer serves every microbatch. (b) With three microbatches in flight, a shared slot is overwritten by F1 and F2 before B0 reads it; three slots, each with its own graph and static buffers, are recycled as each microbatch’s backward for the layer completes. Conceptual illustration after the design described for Megatron-Core (Yan et al., 2026); no measured quantities.

The prototype could capture a narrow rowwise forward core in non-pipeline and smoke-test configurations, but it did not establish a beneficial complete PP training path. Marking more tensors as static did not solve the scheduling problem, because the number and reuse order of safe slots depends on the pipeline schedule. We therefore retired the graph-specific backend rather than maintain a second rowwise implementation with an incomplete memory trade-off.

Megatron-Core implements the separate-slot design: one graph per layer and microbatch under pipeline parallelism, graphs captured in execution order so that they share one memory pool, and static buffers reused by the pipeline order, for which it reports about a ten percent end-to-end speedup at roughly 7 GB of extra memory on a DeepSeek-V3 configuration (Yan et al., 2026). This result includes the schedule-dependent storage that our isolated forward capture lacked.

15.7 Local Savings Must Survive the Training Schedule

These decisions favor the complete training path over savings in an isolated region. The offload budget exceeds host-link bandwidth; wave overlap must pay for smaller GEMMs and interference; and TBO’s small gain did not justify its additional schedule coordination. For Wgrad, global conversion followed by a tuned GEMM beat direct consumption of the forward layout. The graph and megakernel prototypes lacked the storage or distributed execution needed to carry their local operations through training.

Part IV

Findings and Outlook

The remaining sections examine training-recipe choices and a separate benchmarking lesson. We begin with learning-rate scaling and upcycling, turn to operand-value effects in GEMM measurements, then return to shared-expert structure and activation merging. We close with post-training and a comparison with related systems.

16 Learning Rate Scaling with Global Batch Size

Batch-size warmup increases the amount of data processed by each optimizer step as training progresses. It can reduce the number of synchronization and optimizer steps required to process a fixed token budget, but the learning rate must change with the batch. In our batch-size-warmup run, square-root scaling left visible changes in the loss curve at later batch increases.

A common recipe uses the square-root rule (Hoffer et al., 2017), which Malladi et al. (2022) derive for Adam: if the batch grows from B to NB , then

$$\eta(NB) = \eta(B)N^\alpha, \quad \alpha = \frac{1}{2}. \quad (63)$$

This is the rule used by the batch-size-warmup experiments of Merrill et al. (2025), where the batch grows only after the measured critical batch size has increased. The derivation of Malladi et al. (2022) rests on a stochastic-differential-equation analysis whose same-trajectory condition also scales Adam’s moment coefficients and ϵ together with the learning rate. Olmo changes only the learning rate. These results motivate square-root scaling, but do not imply that a single exponent preserves the training trajectory at every batch transition.

16.1 Critical Batch Size Defines the Useful Batch Regime

Let g_i be the gradient from one training example, $G = \mathbb{E}[g_i]$ the full gradient, and $\Sigma = \text{Cov}(g_i)$ the per-example gradient covariance. For a batch of B independently sampled examples,

$$\hat{G}_B = \frac{1}{B} \sum_{i=1}^B g_i, \quad \mathbb{E}[\hat{G}_B] = G, \quad \text{Cov}(\hat{G}_B) = \frac{\Sigma}{B}. \quad (64)$$

Larger batches therefore give less noisy gradient estimates. Under a local quadratic approximation with Hessian H , the expected loss after one stochastic-gradient update is

$$\mathbb{E}[L(\theta - \eta \hat{G}_B)] \approx L(\theta) - \eta \|G\|^2 + \frac{\eta^2}{2} \left(G^\top H G + \frac{\text{tr}(H\Sigma)}{B} \right). \quad (65)$$

Minimizing Equation 65 gives

$$\begin{aligned} \eta_{\text{opt}}(B) &= \frac{\eta_{\text{max}}}{1 + \mathcal{B}_{\text{noise}}/B}, & \eta_{\text{max}} &= \frac{\|G\|^2}{G^\top H G}, \\ \mathcal{B}_{\text{noise}} &= \frac{\text{tr}(H\Sigma)}{G^\top H G}. \end{aligned} \quad (66)$$

This model predicts two regimes (McCandlish et al., 2018). When $B \ll \mathcal{B}_{\text{noise}}$, the optimal stochastic gradient descent (SGD) step grows approximately in proportion to B . When $B \gg \mathcal{B}_{\text{noise}}$, it approaches η_{max} , so enlarging the batch yields diminishing optimization benefit. The often-used **simplified noise scale**,

$$\mathcal{B}_{\text{simple}} = \frac{\text{tr}(\Sigma)}{\|G\|^2}, \quad (67)$$

follows only after removing the Hessian weighting. It is therefore a useful intuition for the turnover, not an exact critical-batch estimator. Large empirical studies likewise find that the useful degree of data parallelism depends on the workload, optimizer, tuning protocol, and target quality (Shallue et al., 2019).

For language-model training, rather than inferring critical batch size from gradient noise, Merrill et al. (2025) branch from a checkpoint and directly find the largest batch whose loss still matches a smaller-batch reference after the same number of tokens. For an Adam branch with batch multiplier k , they set $B_k = kB$ and $\eta_k = \sqrt{k}\eta$, measure its smoothed loss L_k after a fixed token budget, and, with a small loss tolerance ε , define

$$k^* = \max\{k : L_k \leq L_j + \varepsilon \text{ for every } j < k\}, \quad B^* = k^* B. \quad (68)$$

They find that this **empirical critical batch size** starts small, grows rapidly, and then plateaus. They also find that the simplified noise scale can underestimate the directly measured value by orders of magnitude and can follow a different trend. Equation 68 tests the useful batch range while taking square-root learning-rate scaling as an input. Critical batch size therefore answers *when* a larger batch remains token-efficient; it does not determine the exact Adam learning-rate multiplier needed at that transition.

16.2 Adam Does Not Imply One Universal Exponent

Square-Root Scaling Is a Local Approximation

Two independent effects keep the batch exponent from being universal: the optimal step saturates as the batch approaches the turnover scale, and Adam’s slowly adapting second moment lags an abrupt change in gradient noise. The first makes the exponent depend on where the batch sits relative to the turnover; the second pushes it above one half at a batch transition. Neither fixes its value.

For learning-rate searches, McCandlish et al. (2018) use a more general saturating curve, which we write as

$$\eta(B) = \frac{\eta_\infty}{(1 + B_{\text{turn}}/B)^\alpha}, \quad (69)$$

where B_{turn} is the fitted turnover scale and η_∞ is the large-batch limit. These names distinguish this fitted curve from the directly measured B^* above. Its local log–log slope is

$$\alpha_{\text{eff}}(B) = \frac{d \log \eta}{d \log B} = \alpha \frac{B_{\text{turn}}}{B + B_{\text{turn}}}. \quad (70)$$

The curve behaves like a power law well below the turnover, but its **effective exponent** decreases toward zero as the batch grows. A fixed power law is thus at best a local approximation, even before accounting for optimizer state.

Adam adds another reason for the exponent to vary. For coordinate i , its update has the form

$$\Delta\theta_i = -\eta \frac{\mathbb{E}_{\beta_1}[G_i]}{\sqrt{\mathbb{E}_{\beta_2}[G_i^2] + \epsilon_{\text{Adam}}}}. \quad (71)$$

Ignoring the exponential moving averages and ϵ_{Adam} for intuition gives

$$\Delta\theta_i \approx -\eta \frac{\text{sign}(\mathbb{E}[G_i])}{\sqrt{1 + s_i/\mathbb{E}[G_i]^2}}, \quad (72)$$

where s_i is the step-to-step variance of that gradient coordinate. If batch sampling dominates this variance, then $s_i \propto 1/B$. This motivates square-root scaling for Adam. In practice, however, β_2 is commonly close to one, so the second-moment accumulator reacts slowly to an abrupt change in gradient noise. McCandlish et al. (2018) argue that this lag moves the useful exponent from 0.5 toward the SGD limit of 1.0; their measured Adam and RMSProp exponents lie between these values before the learning rate eventually flattens. This theory supports our suspicion that $\alpha = 0.5$ can slightly under-correct a batch transition, but it does not predict a specific replacement exponent.

16.3 An Empirical Exponent of 0.53 Smoothed Batch Transitions

Figure 66 follows one 3.21B@23.10B (active@total parameters) MoE with 24 layers, 48 routed experts, top-4 routing, and one shared expert. Its global batch increases through 1, 2, 3, 6, 9, 15, and 24 Mi tokens while the learning rate follows Equation 63. At the later, larger-batch transitions, the smoothed loss shows a visible downward change in curvature. The effect is consistent with the effective learning rate becoming slightly smaller at the transition: multiplying by $N^{1/2}$ did not fully preserve the local training trajectory.

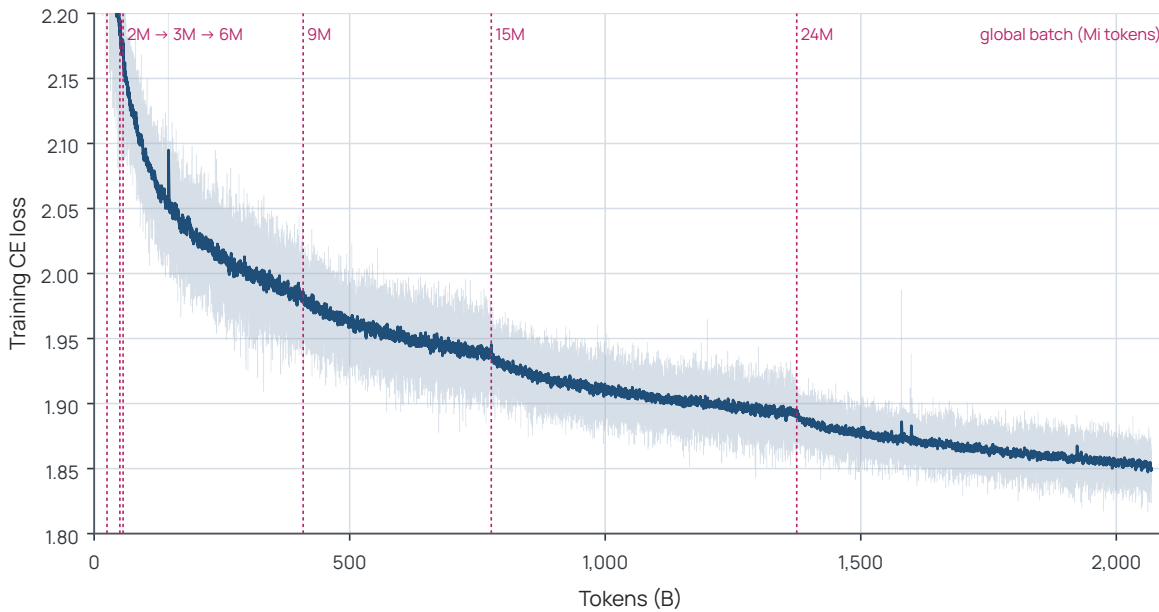


Figure 66 Square-root learning-rate scaling leaves visible curvature changes at large batch-size transitions.

Training cross-entropy loss is shown against cumulative tokens for a 3.21B@23.10B MoE trained for approximately 2.07 trillion tokens. The light trace is the raw loss and the dark trace is a time-weighted exponential moving average (TWEMA). Dotted lines mark each global-batch increase, labeled with the new batch in Mi tokens (written as M in the figure); the batch progresses through 1, 2, 3, 6, 9, 15, and 24 Mi tokens, and the later transitions occur at approximately 409B, 777B, and 1.375T cumulative tokens. Appendix B.8 records the run’s recipe and reproduction artifacts.

Across repeated internal tuning runs, we found $\alpha = 0.53$ to be a useful empirical setting: it removed the visible change in curvature at the batch increase more consistently than $\alpha = 0.5$. This is a small correction; for a batch doubling, it raises the learning rate only $2^{0.03} - 1 \approx 2.1\%$ above square-root scaling. Its direction is consistent with the slow-adapting Adam second moment discussed above, but its value was selected from experiments rather than derived from the theory or fitted to the single curve in Figure 66. We therefore present 0.53 as an Olmo training recipe, not as a universal scaling exponent.

Section takeaway. Critical batch size identifies when a larger batch remains useful; the Adam learning-rate multiplier still needs tuning. In our batch-size transitions, $\alpha = 0.53$ preserved the local loss trajectory more closely than square-root scaling.

17 Scaling Expert Learning Rate with Sparsity Did Not Help

Each routed expert sees only a fraction of the global tokens. This motivates a simple heuristic: if K of N experts are selected for each token, reduce the expert learning rate by the square root of the activation ratio,

$$\eta_{\text{expert}} = \eta_{\text{main}} \sqrt{K/N}. \quad (73)$$

We are not aware of an established expert-learning-rate rule of this form; we tested it as a direct analogy to the square-root batch-size rule of Section 16. For top-4 routing over 64 experts, this sets the expert learning rate to one quarter of the main learning rate. This analogy assumes that expert-gradient noise follows the same scaling as an ordinary independently sampled batch. Routed tokens, router specialization, Adam preconditioning, and correlations between experts need not satisfy that assumption. OLMoE’s routing analyses, for example, find domain and vocabulary specialization rather than identical random subsamples across experts (Muennighoff et al., 2024).

We tested the heuristic with 0.43B@2.51B MoEs using 64 routed experts and top-4 routing. Each point trains one model to 150B tokens. One sweep uses the same learning rate for all parameters; the other applies Equation 73 to the routed-expert parameters while sweeping the main learning rate. The unscaled sweep reached a lower best validation loss than the sparsity-scaled sweep, even after the main learning rate was retuned for each: the smaller expert learning rate did not improve this controlled model family.

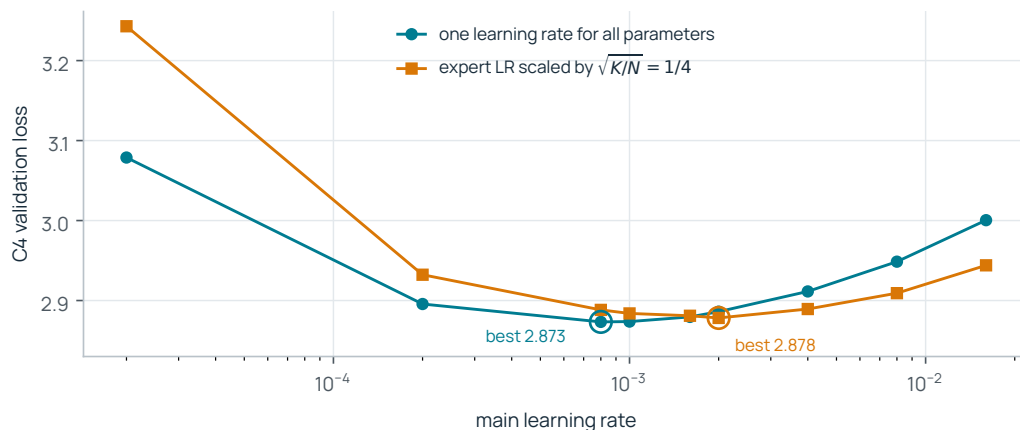


Figure 67 Sparsity-scaled expert learning rates did not improve the tested sweep. Each point is one 0.43B@2.51B, top-4-of-64 MoE trained for 150B tokens. The teal sweep uses one learning rate for all parameters; the orange sweep sets $\eta_{\text{expert}} = \eta_{\text{main}} \sqrt{K/N} = \eta_{\text{main}}/4$. Both sweeps cover the same nine main learning rates; markers are observed runs and connecting lines are visual guides. After independently tuning the main learning rate, the best unscaled run reaches C4 (Raffel et al., 2020) validation loss 2.873 at 8×10^{-4} , while the best sparsity-scaled run reaches 2.878 at 2×10^{-3} . Each point is a single run without seed replication, so the comparison is directional rather than a precise estimate of the gap.

In this sweep, the activation ratio alone did not justify square-root down-scaling. Our default is therefore to use the same learning rate for routed experts and the rest of the model unless a matched sweep for the target model supports a different choice.

18 Why We Do Not Upcycle

We train the target MoE architecture from the beginning. This is a recipe choice for the long training horizon considered in this report, not a general conclusion that upcycling is ineffective. In **sparse upcycling**, a pretrained dense checkpoint is converted into an MoE, typically by copying or mapping its feed-forward weights into multiple experts, initializing a router, and then continuing training (Komatsuzaki et al., 2023). This can provide a useful head start when a suitable dense checkpoint already exists. When dense pretraining

and sparse continuation share one fixed compute budget, however, the dense prefix also consumes tokens that could have trained the target sparse model directly.

The published OLMoE study tested this trade-off. It converted an OLMo-1B checkpoint trained for 2T tokens into a top-2-of-8 MoE, then compared continued training with a sparse model trained from scratch. The upcycled model was better early in the continuation, but the scratch model caught up after roughly 500B tokens and began to outperform it near 600B tokens (Muennighoff et al., 2024). That crossover matters for our setting: the target OLMoE recipe was designed for 5T tokens, far longer than the roughly 500B tokens over which the upcycled model led. A dense checkpoint was therefore not a compelling prerequisite for the training run.

Upcycling also couples the target model to the source architecture and its initialization. Copying one dense multilayer perceptron into several routed experts starts those experts from the same function; the router and subsequent gradients must then create specialization. Olmo-core includes prototype conversion paths for copying the dense MLP into routed or shared branches and for the virtual-group initialization that He et al. (2024) introduce for upcycling into fine-grained experts, but changing the mapping does not remove the underlying budget decision. For a new model whose sparse architecture and training recipe are known in advance, direct sparse training lets the router and independently initialized experts adapt together over the entire run.

This decision is conditional. Drop-Upcycling shows that partially reinitializing copied experts can improve specialization and long-run learning relative to direct copying (Nakamura et al., 2025). Scaling-law results likewise show that the preferred path depends on how much compute has already been spent on the dense checkpoint and how much sparse continuation remains (Liew et al., 2025). Upcycling may therefore be attractive when a compatible dense checkpoint is already valuable and the continuation is short. For our long training horizon and target architecture, the available evidence did not justify making it the default.

19 GEMM Timing Depends on Operand Values

While comparing rowwise expert parallelism (EP) with DeepEP v2, we initially observed different expert-GEMM times after matching tensor shapes and routing. The two paths did not, however, contain comparable weights: one used normally initialized BF16 values, while the other consumed storage created with `torch.empty()`, whose documented contents are uninitialized (PyTorch Contributors, 2026h). Once both paths used the same normal initialization and routing, the apparent rowwise advantage disappeared.

The effect reproduced without MoE, communication, routing, or Olmo-core. A minimal Blackwell benchmark measured one PyTorch grouped GEMM and one dense matrix multiplication while changing only the BF16 weight values. Table 34 shows the resulting median kernel times.

Weight values	Grouped GEMM	Dense GEMM
Normal random	31.059 ms	24.724 ms
Uniform random	31.682 ms	25.829 ms
Random sign, fixed magnitude	25.979 ms	24.160 ms
All zeros	18.896 ms	19.424 ms
Constant fill	20.606 ms	24.350 ms
Uninitialized storage	30.213 ms	24.321 ms

Table 34 Operand values changed GEMM timing at fixed shape, layout, and dtype. The grouped operation used eight groups with 16,384 rows per group and 8192×16384 BF16 weights; the dense operation used the corresponding $M = 131,072$, $K = 8192$, $N = 16,384$ shape. Measurements use one NVIDIA B300 GPU, two warmup iterations, and five timed iterations; the table reports their median. Bold marks the times that depart clearly from the normal-random baseline. Uninitialized storage is shown only to expose the original benchmark error; it is not a meaningful model-like weight-value distribution. The reproducer, recovered summary data, and provenance notes are bundled with the report’s experiment artifacts.

Relative to normally distributed weights, zeros reduced the grouped-GEMM time by 39%, a constant fill reduced it by 34%, and random signs at a fixed magnitude reduced it by 16%. The dense GEMM also took 21% less time with zero weights, but its constant-fill time remained close to the normal case. The effect is therefore neither unique to grouped GEMM nor a simple monotonic law of value entropy. This is a single run that preserved medians but not individual samples, clocks, power, temperature, or the complete software environment. The percentages characterize this run rather than a general Blackwell performance law.

19.1 Operand-Dependent Hardware Behavior Has Prior Evidence

On an NVIDIA A100, Bhalachandra et al. (2022) measured the same $16,384^3$ DGEMM with fixed and random matrix values. The fixed-valued case reached 19.4 TFLOP/s, whereas the random case reached 18.6 TFLOP/s, about 4% lower, while drawing 67% more average power. Their measurements show that operand values affect the physical workload even when matrix dimensions match.

Other studies also find value-dependent power, without always observing a runtime difference. ALUPower measured substantial value-dependent energy variation in GPU arithmetic (Lucas and Juurlink, 2016). More recently, Gregersen et al. (2024) varied GEMM value distributions, bit similarity, placement, and sparsity on A100, H100, V100, and RTX 6000 GPUs. They found power changes approaching 40%. In their main A100 experiments, however, the average CUTLASS GEMM runtime for a fixed datatype remained consistent to the microsecond level. Together, these studies establish that operand bits can change physical GPU activity. They do not establish that every GPU, shape, or power regime will turn that change into a runtime difference.

19.2 Possible Mechanisms and Their Evidence

Our benchmark did not isolate a hardware mechanism. A plausible explanation is data-dependent switching activity. Similar bit patterns and low Hamming weight can reduce bit transitions through arithmetic and memory datapaths, which changes dynamic power. If a power-limited GPU responds by changing its operating frequency, the same instruction stream can then take a different amount of time. This explanation is consistent with the prior power studies, but our run did not record power or SM clocks and therefore does not test the causal chain.

Separate B300 stress measurements show that power limiting can reduce clocks and throughput. The grouped-GEMM diagnostic of Section 9 (Appendix A.12) drove B300 GPUs against their board power limit with very large expert shapes: the software power-cap limiter was active in effectively every telemetry sample, the median SM clock fell from 1174 to 960 MHz, and median grouped-GEMM throughput fell from 1366 to 1163 TFLOP/s, while per-trial throughput per MHz (each trial’s throughput divided by its mean SM clock) had per-shape medians within 1.16–1.19 TFLOP/s/MHz on the same kernel template. That run varied shape rather than operand values, so it speaks to how this hardware responds rather than to what triggered the response in Table 34. In the stress diagnostic, throughput fell with the lower clock. These measurements do not establish why operand values changed timing in the original run. Table 35 collects the observations relevant to the power-and-clock hypothesis. Matching operands, as described in Section 19.3, controls the observed timing effect without requiring a choice among mechanisms.

Inline compression is another possible mechanism, but we have no evidence that it was active in this experiment. NVIDIA documents that Hopper can transfer compressible global memory using fewer physical bytes and thereby exceed nominal uncompressed bandwidth (NVIDIA, 2026s). This is an opt-in property of an individual allocation, requested through the CUDA Driver API; it is not a general promise that ordinary tensors are compressed (NVIDIA, 2026o). Our benchmark used ordinary PyTorch allocations on a Blackwell B300 and never requested the compressible-memory attribute. A later check on the same GPU class with the current PyTorch allocator found that an ordinary tensor, when it could be queried at all, reported no compression attribute; that check describes the current allocator rather than the environment of the original run. The high arithmetic intensity of these GEMMs and the different constant-fill behavior of grouped and dense kernels also argue against assuming a single bandwidth-only explanation.

The public GEMM interfaces do not declare that zero or constant operands may skip mathematical work, so we do not interpret the result as semantic zero skipping. We also did not preserve a kernel-identity or instruction trace that would rule out every library- or kernel-specific effect. The claim this report makes is

Observation	What was measured	Source
Operand values change dynamic power	Random values drew 67% more average power than fixed values in a 16,384 ³ DGEMM; value distributions moved GEMM power by up to about 40%	A100, prior work
A power-limited GPU lowers its clock	Power-cap limiter active in 99.3% of telemetry samples; SM clock 1174 to 960 MHz	B300, Section 9
Lower throughput tracks the lower clock	Throughput 1366 to 1163 TFLOP/s at a nearly constant 1.16–1.19 TFLOP/s per MHz (per-shape medians), same kernel template	B300, Appendix A.12
Operand values change time	Grouped-GEMM time fell by 16–39% and dense-GEMM time by up to 21% at fixed shape, layout, and dtype	B300, Table 34

Table 35 Measurements relevant to a possible power-and-clock explanation. The prior-work row summarizes Bhalachandra et al. (2022) and Gregersen et al. (2024). The two clock-related rows come from the B300 grouped-GEMM stress diagnostic, which varied shape rather than operand values: they show how this hardware trades clock for power at the board limit. The report draws its benchmarking rule from the last row alone and attributes the effect to no single mechanism.

limited to the observation: operand values changed the time of an otherwise identical GEMM. The measurements do not identify which combination of switching power, clock response, and memory-system behavior produced it.

19.3 Use the Same Initialization in Every Comparison

Operands Are Part of the Benchmark Configuration

For a backend comparison, use identical loaded weights whenever possible. Otherwise, use the same initializer, seed, scale, dtype, and layout on every path. Matching only the GEMM dimensions is insufficient.

This control should be applied after sharding, conversion, or expert placement so that no path retains uninitialized local storage. End-to-end comparisons should load the same checkpoint. Synthetic comparisons should use the same initialization method and random seed. Zeros, constant fills, and `torch.empty()` are useful diagnostic cases, but they are not substitutes for model-like values. If a communication change appears to alter an otherwise unchanged GEMM, operand statistics, clocks, and power should be checked before attributing the difference to the communication backend.

20 One Shared Expert Is All You Need

Multiple ungated shared experts can be merged. Several recent MoE designs expose the number of always-active shared experts as a choice; Olmo-core supports at most one, because any larger count expresses the same model. Suppose every token is sent to several shared experts, every shared expert receives the same input, and their outputs are added without expert-specific, input- or task-dependent gates. The same function can be computed by one shared multilayer perceptron (MLP) whose intermediate width is the sum of their widths (Figure 68). The number of named shared experts is therefore only a partitioning choice; the architectural quantity is the **total shared width**.

MoEification uses the same intermediate-dimension partition of a Transformer feed-forward network, and DSMoE writes the equivalence explicitly for a SwiGLU MLP (Zhang et al., 2022; Lv et al., 2025). At fixed total shared width, changing only the number of ungated shared modules does not change the function class.

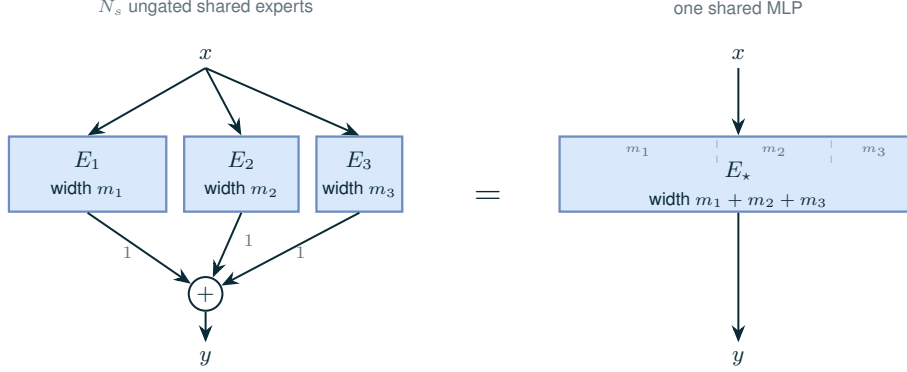


Figure 68 Combining ungated shared experts into one wider MLP. Every token reaches all N_s shared experts, and their outputs are added with fixed unit coefficients, so the sum equals one MLP whose intermediate width is the sum of the branch widths (Equation 76). The dashed marks show where each original partition sits after concatenating the up and gate projections and stacking the down projections; box widths are drawn proportional to intermediate widths.

20.1 The Collapse Is Exact

Let shared expert j have intermediate width m_j . Using row-vector notation, write its SwiGLU computation as (Shazeer, 2020)

$$E_j(x) = [\text{SiLU}(xW_g^{(j)}) \odot (xW_u^{(j)})]W_d^{(j)}. \quad (74)$$

Each gate and up projection has m_j columns, and the down projection has m_j rows. Form one wider MLP by concatenating the gate and up projections and stacking the down projections:

$$W_g^* = [W_g^{(1)} \ \dots \ W_g^{(N_s)}], \quad W_u^* = [W_u^{(1)} \ \dots \ W_u^{(N_s)}], \quad W_d^* = \begin{bmatrix} W_d^{(1)} \\ \vdots \\ W_d^{(N_s)} \end{bmatrix}. \quad (75)$$

Because SiLU and the elementwise product act independently along the intermediate dimension, multiplication by the stacked down projection adds the partitions:

$$E_*(x) = [\text{SiLU}(xW_g^*) \odot (xW_u^*)]W_d^* = \sum_{j=1}^{N_s} E_j(x), \quad \text{width}(E_*) = \sum_{j=1}^{N_s} m_j. \quad (76)$$

The same construction applies to an ordinary two-layer MLP. Fixed expert-specific coefficients do not change the result: for $\sum_j c_j E_j(x)$, absorb each constant c_j into the corresponding rows of $W_d^{(j)}$. A single input- or task-dependent gate shared by the entire branch also does not require several experts, since

$$a(x) \sum_j E_j(x) = a(x) E_*(x). \quad (77)$$

Only distinct input- or task-dependent coefficients $a_j(x, t)$ generally prevent this fixed reparameterization.

The wide and partitioned forms have the same parameters and ideal model FLOPs. Their parameter gradients also map slice by slice when initialization, optimizer settings, and optimizer variables are mapped in the same way. Separate kernels may accumulate floating-point terms in a different order, and the two layouts may have different systems performance, but neither effect creates a new represented function.

20.2 Dynamic Gates Preserve Expert Identity

Multiple shared experts become a real architectural choice when the branches are no longer fixed partitions of one MLP. Let $h_j(x)$ denote expert j 's intermediate activation of width m_j , and let $g_j(x, t)$ be its coefficient

for input x and, when applicable, task t . Concatenate the activations as $H(x) = [h_1(x) \cdots h_{N_s}(x)]$. The gated merge can then be written as

$$y(x, t) = \sum_{j=1}^{N_s} g_j(x, t) h_j(x) W_d^{(j)} = H(x) D(g(x, t)) W_d^*,$$

$$D(g) = \text{blockdiag}(g_1 I_{m_1}, \dots, g_{N_s} I_{m_{N_s}}). \quad (78)$$

When the coefficients differ by expert, $D(g(x, t))$ changes with the input or task and cannot generally be absorbed into the fixed down projection W_d^* . This is the precise boundary of the collapse. A common scalar $a(x, t)$ applied to the whole sum does not change this: then $D = aI$, the experts still collapse into E_* , and only the outer branch gate remains. Conditional selection, per-expert normalization, different inputs, and branch-specific operations also preserve expert identity.

Earlier MoE architectures illustrate this boundary. One terminology distinction is important: in multi-task learning, a “shared expert” usually means an expert whose parameters are available to several tasks. It does not necessarily mean the always-active shared branch used in recent language-model MoEs. Table 36 therefore lists these models as precedents for *separately gated* shared capacity, not as counterexamples to the ungated equivalence.

Architecture	Expert structure	Gate and evaluation	Why experts stay distinct
Adaptive local experts (Jacobs et al., 1991)	Common expert bank; every expert receives the input	Normalized, input-dependent responsibilities for individual experts	Each expert receives a different dynamic coefficient
Hierarchical MoE (Jordan and Jacobs, 1994)	Experts organized beneath a tree of gates	Input-dependent coefficients composed along each path	The effective coefficient varies by expert and input
Sparsely-gated MoE (Shazeer et al., 2017)	Globally available feed-forward expert bank	Noisy top- K routing evaluates and weights a selected subset	Both the coefficients and executed experts vary
One-gate Mixture-of-Experts (OMoE) (Ma et al., 2018)	One expert pool supplies all task towers	One input-dependent <i>vector</i> gate forms a common dense mixture	One gating network still emits one coefficient per expert
Multi-gate Mixture-of-Experts (MMoE) (Ma et al., 2018)	Expert parameters are shared across tasks	Each task has its own input-dependent softmax vector	The same input can expose a different mixture to each task
CGC / PLE (Tang et al., 2020)	Multiple shared experts coexist with task-specific experts	Task gates separately weight both groups; PLE stacks these units	Every shared expert remains separately addressable

Table 36 Earlier architectures retain multiple experts through expert-specific dynamic gates. Customized Gate Control (CGC) and Progressive Layered Extraction (PLE) are the clearest older examples with an explicitly named bank of multiple shared experts. Their meaning of “shared” is parameter sharing across tasks, whereas recent language-model shared experts are typically always-active branches. None of the listed models satisfies the fixed-coefficient assumptions of Equation 76.

In the one-gate baseline, “one gate” means one network that emits a vector of expert coefficients, not one scalar multiplying the sum. Multi-gate Mixture-of-Experts (MMoE) makes the task dependence explicit, while Customized Gate Control and PLE add separately gated task-specific and shared banks. Dense vector gating and sparse top- K routing both prevent the collapse for the same algebraic reason; sparsity additionally changes which expert computations execute.

20.3 Expert Count Is Not Shared Capacity

The equivalence changes how shared-expert designs and ablations should be reported. For an ungated shared branch, the primary capacity variable is

$$m_s = \sum_{j=1}^{N_s} m_j, \quad (79)$$

not N_s alone. Increasing the number of fixed-width shared experts increases m_s , so it tests additional unconditional capacity and compute rather than an independent benefit from having more expert identities. A count ablation isolates expert partitioning only when total shared width remains fixed; under the assumptions above, such an ablation should differ only through numerical and systems effects.

DeepSeekMoE provides a prominent always-active shared-expert construction (Dai et al., 2024). The collapse is compatible with useful shared capacity, since an unconditional branch may still capture common knowledge; it shows only that several unweighted shared partitions can be represented as one wider branch with the same total capacity.

20.4 Shared and Routed Widths Are Independent

This result directly motivates Olmo’s representation. Olmo uses one shared MLP and chooses its intermediate width independently from the width of one routed expert. There is no mathematical reason for the two widths to match. The shared width controls unconditional capacity applied to every token; the routed width controls the capacity contributed by each selected route.

For example, the configuration analyzed in Section 21 uses routed-expert width 2,560 and shared width 1,280. Calling the latter “half of one routed expert” is only a comparison of widths. It is already the complete shared branch. Splitting it into two width-640 modules and adding their outputs would produce no new model function; combining two width-1,280 modules would simply create one width-2,560 shared MLP in partitioned form.

One wider MLP can also expose a larger GEMM and fewer module launches, but the mathematical identity alone does not predict throughput. Tensor placement, quantization scales, and available kernels can make one physical layout faster than another. Olmo’s use of one shared MLP follows from the functional equivalence, not a measured performance advantage. Its total width remains a model-recipe choice independent of routed-expert width.

21 Merging Routed and Shared Expert Activations

Section 20 established that several ungated shared-expert partitions collapse into one wider shared MLP. After choosing that shared branch, the model recipe must specify how to weight it against the token-dependent routed branches.

An MoE layer may contain both *routed experts*, selected separately for each token, and a *shared expert*, evaluated for every token. The routed and shared branches are projected back to the same model width before they are added, but that does not determine how strongly each branch should enter the sum. A normalization that appears innocuous can shrink the MoE output, change its Jacobian, and rescale the gradients of routed and shared parameters by different amounts.

For token x , let $\mathcal{S}(x)$ contain the K selected routed experts, let $f_i(x) \in \mathbb{R}^{d_{\text{model}}}$ be routed expert i ’s output, and let $g(x) \in \mathbb{R}^{d_{\text{model}}}$ be the shared-expert output. We write the merge as

$$y_{\text{MoE}}(x) = \sum_{i \in \mathcal{S}(x)} r_i(x) f_i(x) + s(x) g(x), \quad |\mathcal{S}(x)| = K. \quad (80)$$

The coefficients $r_i(x)$ determine the routed contribution, while $s(x)$ sets the gain of the shared branch (Figure 69). As Appendix E shows, public MoE implementations make substantially different choices for both quantities (DeepSeek-AI et al., 2024; Muennighoff et al., 2024; Yan et al., 2026). We therefore treat the merge rule as part of the model and initialization recipe.

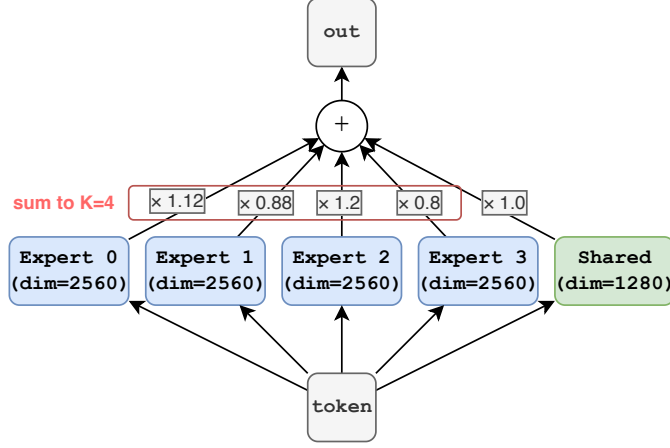


Figure 69 Merging four routed-expert outputs with one shared-expert output. In the Olmo rule, selected routed coefficients vary by token but sum to $K = 4$, so their mean is one; the shared-expert coefficient is also one. Routed and shared experts may have different intermediate widths because every branch returns a model-width tensor before the addition. Conceptual illustration with no measured quantities.

21.1 A Dense MLP Provides the Scale Reference

A dense SwiGLU MLP provides a useful reference because its intermediate dimension can be partitioned exactly. Split its up, gate, and down-projection weights into K blocks of width d_r and one block of width d_s . Matrix multiplication distributes across this partition, giving

$$f_{\text{dense}}(x) = \sum_{i=1}^K f_i(x) + g(x), \quad d_{\text{act}} = Kd_r + d_s. \quad (81)$$

Unit coefficients exactly recover a dense MLP formed by concatenating the active intermediate blocks. For the initialization-scale experiment below, $K = 4$, $d_r = 2560$, and $d_s = 1280$, so the matched dense width is

$$d_{\text{act}} = 4 \times 2560 + 1280 = 11,520. \quad (82)$$

Routing replaces the four unit routed coefficients with data-dependent route weights. Let $p_i(x)$ denote the selected router probabilities after L1 normalization, so $\sum_i p_i(x) = 1$. Olmo-core uses

$$r_i(x) = Kp_i(x), \quad s(x) = 1. \quad (83)$$

If the selected probabilities are uniform, $p_i = 1/K$ and every active branch again has coefficient one. The routed mixture therefore approaches the exact dense decomposition continuously as the selected probabilities approach a uniform distribution.

This choice also accounts for different expert widths without an additional width multiplier. Define the **width-weighted mean coefficient**

$$\bar{a}_w = \frac{d_r \sum_i r_i + d_s s}{Kd_r + d_s}. \quad (84)$$

Equation 83 gives $\bar{a}_w = 1$ for any d_r and d_s . Since the width-weighted mean is already one, a further common factor would rescale the whole MoE output rather than compensate for unequal widths. The narrower shared expert already contributes fewer independently initialized intermediate units, so multiplying its output by a second width fraction would count the same width difference twice under this initialization.

Matching the Coefficients of a Partitioned Dense MLP

Selected router probabilities have mean $1/K$. Multiplying them by K makes the mean routed coefficient one, matching the coefficient of each block in an additively partitioned dense MLP. The shared branch then enters the same sum with unit gain.

21.2 Predicting Variance at Initialization

The dense decomposition also yields a simple scale prediction. Assume the randomly initialized branch outputs are centered and approximately independent, and that output variance is proportional to intermediate width under the common initialization. Conditional on the router coefficients, the MoE-to-dense output-variance ratio is

$$R_{\text{var}} \approx \frac{d_r \sum_i r_i^2 + d_s s^2}{K d_r + d_s}. \quad (85)$$

For the Olmo rule,

$$R_{\text{var}}^{\text{Olmo}} \approx \frac{d_r K^2 \sum_i p_i^2 + d_s}{K d_r + d_s}. \quad (86)$$

Uniform routing gives $\sum_i p_i^2 = 1/K$ and hence $R_{\text{var}}^{\text{Olmo}} = 1$. Router concentration increases the ratio according to the concentration term $\sum_i p_i^2$.

Table 37 contrasts this rule with the three alternatives used in our controlled experiment. All four define valid model parameterizations, but they do not begin at the same forward or backward scale.

Convention	Coefficients	Immediate effect
Olmo	$r_i = K p_i, \quad s = 1$	Unit-average routed coefficients and a unit-gain shared branch.
Routed unit sum	$r_i = p_i, \quad s = 1$	The routed mixture receives one unit in total, while the shared branch independently receives unit gain.
Equal branch mass	$r_i = \frac{1}{2} p_i, \quad s = \frac{1}{2}$	Routed and shared contributions split one unit of coefficient mass.
Width-proportional unit sum	$r_i = \frac{K d_r}{d_{\text{act}}} p_i, \quad s = \frac{d_s}{d_{\text{act}}}$	A single unit of coefficient mass is divided in proportion to active intermediate width.

Table 37 Merge conventions evaluated in the initialization-scale study. The selected probabilities satisfy $\sum_i p_i = 1$, and $d_{\text{act}} = K d_r + d_s$.

21.3 The Measured Forward and Backward Scales Agree

We test the prediction in a controlled random-initialization experiment summarized in Figure 70. The forward study uses $d_{\text{model}} = 2560$, $d_r = 2560$, $d_s = 1280$, $N = 48$ routed experts, and $K = 4$. It evaluates 512 random tokens for each of eight seeds. The dense reference concatenates the same selected and shared weights into an exact width-11,520 SwiGLU MLP, so differences arise from merge coefficients rather than different sampled parameters.

The backward study retains all 48 routed experts while scaling every dimension down by a factor of ten to make repeated gradient measurements practical. It uses 1024 tokens for each of twelve seeds and applies the same random upstream gradient to every normalization. We report input gradients with router coefficients both fixed and differentiable, separating the expert-path Jacobian from the additional gradient through the router.

The selected probabilities have $\mathbb{E}[\sum_i p_i^2] = 0.2589$, only slightly above the uniform top-4 value of 0.25. Substituting this measurement into Equation 86 predicts a variance ratio of 1.032, matching the measured value to within 0.03 percentage points. The shared-to-routed branch RMS ratio is 0.7082 ± 0.0028 , close to $\sqrt{1280/2560} = 0.7071$. This confirms that intermediate width already controls branch scale under the tested initialization.

The backward results expose a second advantage of the Olmo parameterization. With router coefficients fixed, its input-Jacobian scale remains close to the dense reference. Its routed and shared down-projection gradients also retain the unit-coefficient scale. By contrast, routed-unit-sum normalization reduces the routed down-projection gradient RMS to $0.25\times$ the Olmo value for $K = 4$, while leaving the shared down-projection

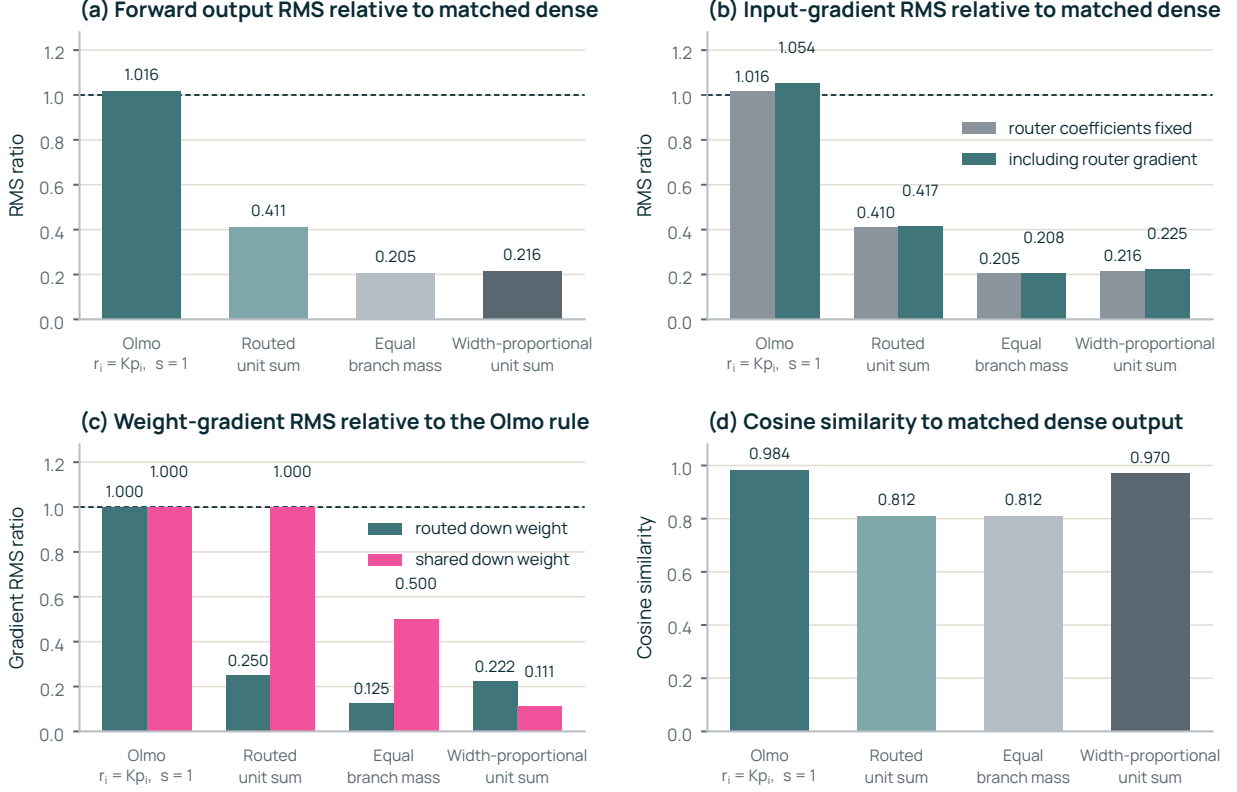


Figure 70 Olmo’s merge rule preserves dense-like scale at random initialization. The four conventions are those of Table 37. (a) The Olmo output RMS is $1.016\times$ the matched dense reference, corresponding to a $1.032\times$ variance ratio. (b) Its fixed-router input-gradient RMS is also $1.016\times$ dense; differentiating through the router raises the ratio to $1.054\times$. (c) Alternatives that constrain the routed or total coefficient mass to one reduce the routed down-projection gradient to a quarter or less of the Olmo value while the shared gradient stays at one or falls with it. (d) Olmo’s output also stays closest in direction to the dense output. Forward measurements use the full-size initialization configuration; backward measurements use the dimensionally scaled surrogate described in the text.

gradient unchanged. Changing the merge rule is therefore also a parameter-family-specific learning-rate change unless the initialization and optimizer are adjusted with it.

21.4 Scope of the Initialization Result

Olmo’s $r_i = Kp_i, s = 1$ rule preserves dense-like forward and expert-path backward scale under the stated architecture, initialization, and approximately uniform selected routing. It has a direct additive interpretation, handles unequal expert widths without a second width penalty, and makes its departure from dense scale predictable through $\sum_i p_i^2$.

The result does not establish a universal MoE normalization. Public models use retained routed mass below one, unit routed mass, learned shared gates, and model-specific routed scales; Appendix E provides a source-pinned comparison. These recipes also differ in initialization, upcycling, router form, and expert width, so their coefficients cannot be ranked in isolation.

Fixed coefficient changes can often be absorbed into expert down projections, but that reparameterization does not make the training recipes identical. It changes initial parameter scale, optimizer states, weight decay, gradient clipping, and effective learning rates. The measurements here characterize random initialization and local backward scale; they do not measure trained language-model quality.

22 Beyond Pretraining

When the same distributed MoE learner is used for post-training, parameter placement and gradient synchronization are still needed for a model whose capacity exceeds one device, but supervision, additional model copies, and rollout generation change the workload. We map those requirements onto the sparse learner and identify the systems needed around it. **This section is a design mapping:** we report no integrated MoE post-training run, throughput, or quality result.

Ai2’s open-instruct codebase provides implementations of several post-training workloads, while the Tülu 3 report documents an earlier actor-critic reinforcement-learning recipe (Ai2, 2026; Lambert et al., 2024). This section considers four workloads: supervised fine-tuning (SFT), Direct Preference Optimization (DPO), Group Relative Policy Optimization (GRPO) (Shao et al., 2024), and Proximal Policy Optimization (PPO) with a critic (Schulman et al., 2017). The open-instruct implementations use different backends: cached-reference DPO uses Accelerate and one GRPO path uses Olmo-core FSDP, while open-instruct’s SFT support includes OLMoE models. Reusing a post-training objective does not require copying its original distributed backend. Table 38 decomposes each workload into its components and marks what this report’s mechanisms could contribute to each. Every workload contains a learner. Preference and reinforcement-learning workloads add reference policies or other model copies, and reinforcement learning also needs a rollout inference system.

22.1 Response-Only Supervision Uses Label Masking

Supervised fine-tuning (Wei et al., 2022; Ouyang et al., 2022) trains on supervised input–target examples, such as instructions paired with demonstrations.

Here we consider a response-only objective: the prompt conditions the prediction, while only response tokens contribute direct loss terms. Olmo’s label-mask path can express this choice by marking prompt labels as ignored. The DDP train module excludes those labels from the loss denominator and identifies them through `label_ignore_index` (default `-100`); it derives per-batch labels when the data loader does not supply them. A supervised batch therefore differs from a pretraining batch in the contents of the label tensor and in the resulting denominator, not in the forward path, the routed expert computation, or the gradient reduction.

Masked positions still execute the MoE layer. Packed, padded, and interleaved fixed-sequence-length datasets are available in the data layer, and the choice among them determines how many real tokens each rank microbatch carries. This matters more under sparse routing than under dense training. Every position present in the microbatch is routed, dispatched to its selected experts, computed, and combined, whether or not its label contributes to the loss. Padding and masked prompt positions consume dispatch bandwidth, expert GEMM rows, and activation memory even when they have no direct loss term. Under EP, masked rows still cross the interconnect during dispatch and combine. Sequence packing reduces this overhead by reducing padding. The useful-token accounting used throughout Section 14 should be recomputed against supervised token counts rather than raw positions before any post-training throughput number is compared with a pretraining one.

Instance-level filtering keeps removed tokens in the denominator. The separate instance-mask path removes whole sequences from the objective but adds their token counts back into the loss denominator. Those tokens therefore contribute zero loss over a nonzero count, lowering the reported loss relative to an exact denominator over the retained instances. This accounting avoids the distributed cost of computing that denominator exactly; the bias depends on how many instances the filter removes. Comparisons of supervised loss curves across stages must account for that difference in the denominator.

22.2 Preference Training Scores Two Sequences Against a Reference

DPO scores paired sequences under a policy and a reference model. DPO computes its loss from a chosen and a rejected continuation of the same prompt, scored under both the trained policy and a frozen reference policy (Rafailov et al., 2023). One logical example becomes two sequences. Their combined lengths determine the routed token count, so the effective rank microbatch must be re-derived; the memory headroom measured for pretraining does not transfer unchanged. The paired sequences also share a prompt prefix

Component	Component in workload				Transfer	What transfers
	SFT	DPO	GRPO	PPO		
Policy learner: the trained MoE	✓	✓	✓	✓	Learner mechanisms	The mechanisms in Parts II and III apply to the learner: distributed data parallel (DDP) synchronization and the sharded optimizer (Section 4), expert parallel (EP) placement and sync-free rowwise movement (Section 5), pipeline parallel (PP) layer placement (Section 6), grouped GEMM, MXFP8 (Section 11), recompute, and topology-agnostic checkpoints (Section 12). Response-only SFT changes the learner’s label tensor and loss denominator while retaining these mechanisms.
Reference policy: frozen, forward only	–	✓	✓	✓	Forward path only	The forward path only: sync-free dispatch, grouped GEMM, and the MXFP8 forward caches. DPO can cache reference log-probabilities before updates, as open-instruct does, avoiding a separate resident reference model. A resident reference adds parameter storage and forward activations, but no gradient buffers or optimizer states.
Critic: trained value model	–	–	–	✓	Second learner	A trained value model. If it uses the same MoE backbone as the policy, the learner mechanisms apply to both; its actual architecture determines the added memory. GRPO removes this model by using group-relative advantages.
Reward: verifier or reward model	–	–	○	○	None needed, or forward path only	A CPU-based checker needs no learner GPU, but verification cost depends on the task and execution environment. A learned reward model adds a separate forward-only workload.
Rollout generation: inference engine	–	–	○	○	Insight only, not code	An inference system outside this report’s measurements. At small decode batches, rows per expert can fall below the grouped-GEMM crossover (Section 9); batching and routing determine that count. Host-visible route metadata (Section 8), load imbalance (Section 10), and operand-dependent GEMM time (Section 19) are relevant costs, but the training measurements do not quantify them in a serving engine.
Weight transfer: learner to inference	–	–	○	○	Substrate only	The topology-agnostic checkpoint tensors of Section 12 are the substrate, since they already separate stored tensors from the EP and PP layout that produced them; their latency inside a rollout loop is not measured here.

Table 38 Components of post-training workloads and their mapping to the sparse learner. Transfer categories describe reuse of learner mechanisms, not demonstrated end-to-end integration with these trainers. A check mark (✓) marks a component that the workload contains and that this report’s mechanisms serve; an open circle (○) marks a component the workload contains outside the learner, which this report does not measure; a dash marks a component the workload does not have. The reference row assumes reference-regularized GRPO and PPO. SFT, cached-reference DPO, and GRPO orchestration follow open-instruct (Ai2, 2026); the PPO configuration follows the Tülu 3 RLVR recipe (Lambert et al., 2024). Both RL examples use vLLM rollout engines (Kwon et al., 2023) and verifiable rewards. Reinforcement learning from a learned reward model adds that model to the reward row.

whose routed computation is performed twice unless the implementation deliberately shares it. Reference log-probabilities require either a second resident model, which uses memory alongside the learner, or a precomputation pass whose outputs are cached and read back. Precomputation removes the resident model’s memory cost but fixes the reference policy for the run.

The cached-reference DPO implementation in open-instruct scores the dataset with the initial policy before updating it, then reads those scores during training (Ai2, 2026; Lambert et al., 2024). This avoids allocating a second resident reference copy. Its existing trainer uses Accelerate; a sparse DPO adaptation could instead

supply the objective to the learner described here. The paired-sequence and reference accounting would still apply, but this report makes no throughput or quality claim for that adaptation.

22.3 RLVR Adds Systems Outside the Learner

RLVR surrounds the learner with a rollout and verification system. Reinforcement Learning with Verifiable Rewards (RLVR) (Lambert et al., 2024) generates rollouts from the current policy, verifies them against a programmatic checker, and updates the policy from the resulting rewards. GRPO and the actor-critic PPO configuration considered here differ inside the learner: PPO trains a value model alongside the policy, whereas GRPO estimates advantages from a group of rollouts (Schulman et al., 2017; Shao et al., 2024). A sparse GRPO policy therefore needs one learner; PPO adds value-model training, with a cost set by the chosen critic architecture. DeepSeek-R1 is a public example applied to an MoE policy (Guo et al., 2025), and HybridFlow makes the boundary between the rollout system and the learner explicit (Sheng et al., 2025). The learner described in this report is one component of that arrangement. The additional components—rollout generation at inference precision and batch shape, reward verification, actor orchestration, and repeated transfer of updated weights from the learner to the inference engine—are a separate systems problem whose costs are not addressed by any measurement in this report.

Online weight transfer requires a separate latency budget. Olmo-core can already export a trained MoE checkpoint into a Hugging Face model definition, and it contains a generation module and sampling path. Those provide an offline route from a training checkpoint to an inference engine for evaluation. Online reinforcement learning requires repeated, low-latency propagation of updated expert weights from the training topology into a serving topology whose expert placement is chosen for inference rather than for training. The topology-agnostic checkpoint representation of Section 12 is the natural substrate for that transfer, since it already decouples stored tensors from the EP and PP layout that produced them. Whether it is fast enough to sit inside a rollout loop is untested here.

22.4 Supervised and Routed Token Rates Measure Different Work

Comparisons across stages should state the base checkpoint, learner configuration, batch construction, and token accounting. The same number of supervised tokens can require different numbers of routed tokens because prompts, padding, and preference pairs still execute the model. Reporting supervised tokens per second alongside routed tokens per second makes that difference visible.

23 Related MoE Systems Make Different Trade-Offs

MoE systems differ in which tensors they move, which weights remain in memory between uses, how long buffers remain valid, and which numerical representations determine the optimizer update. We compare those choices here, including systems that use the same terms—expert parallelism, distributed optimization, FP8, or overlap—for different implementations. Table 39 summarizes four design axes. The comparison covers the mechanism families used in this report rather than an exhaustive survey of MoE implementations. Relative performance requires matched experiments; another system’s reported results are not performance measurements for Olmo-core. The quantitative results discussed here apply to their stated models, software, and hardware; they do not establish portability or scaling beyond those settings.

23.1 Conditional Compute Shifts Work to Systems

Sparse activation separates stored expert capacity from per-token computation. Sparsely gated MoE layers established this construction (Shazeer et al., 2017); Switch Transformers simplified routing to top-1 (Fedus et al., 2022); GShard demonstrated automatic sharding of conditional computation (Lepikhin et al., 2021); and GLaM applied sparse activation to large-scale language models (Du et al., 2022).

Inactive experts still contribute parameter, optimizer, and checkpoint storage, and selected tokens must reach the ranks holding their experts. Conditional computation reduces active arithmetic while adding expert placement, token movement, and distinct gradient-reduction and optimizer requirements.

System	Weight materialization	Route representation	Update tensor precision	Overlap resource control
Olmo-core DDP (this report)	Rank-local compute weights stay resident across microbatches; experts partitioned by EP	Fixed-capacity, route-indexed rowwise movement with device-side agreement; no host split lists	FP32 main weights, optimizer states, and gradients are authoritative; BF16 and MXFP8 are derived caches and payloads	Phase-sequential by default; wave and two-batch overlap measured and not adopted
Megatron-Core MoE	Distributed optimizer: resident local compute weights; FSDP is a separate sharded-weight option	Dispatch as a backend choice, collective and optimized, drop-and-pad or dropless	Configurable; example: FP32 main weights and gradients, BF16 moments; FP32 update arithmetic	Hiding conditioned on sufficient independent work; SM carve-out with a reported GEMM cost
PyTorch FSDP	Full-reshard policy: gather weights before forward and backward; release gathered copies after each	Not MoE-specific	FSDP2: original-dtype parameter shards for optimizer; compute and reduction dtypes configurable	Parameter prefetch; not an MoE dispatch concern
DeepSpeed-MoE	Gather/retention policy not specified in cited MoE paper	MoE-specific collectives at scale	Main-weight, gradient, and moment dtypes not specified in cited MoE paper	Not its emphasis
MegaBlocks	Gather/retention policy not specified in cited paper	Block-sparse expert kernels keep every assignment without capacity padding	Megatron-LM mixed precision; update-tensor dtypes not specified in cited paper	Not its emphasis
DeepSeek-V3 and DeepEP	V3 training: ZeRO-1 retains full local compute weights; experts partitioned by EP	Optimized dispatch and combine kernels; DeepEP v2 lowers communication’s SM footprint	V3 training: FP32 master weights and accumulation gradients; BF16 AdamW moments	Communication SMs assigned explicitly; cache and compute interference acknowledged

Table 39 Design choices in related MoE systems. Cells are taken from each system’s own account, as cited in the text; none is a measured comparison. “Not its emphasis” marks an axis that the cited description does not treat as a design choice. Weight materialization describes compute-weight gather/retention, and update precision refers to optimization tensors under the stated policy; the weight and update cells in the combined DeepSeek row describe V3 training.

23.2 Token and Weight Movement Costs Differ

PyTorch FSDP is a general answer to model-memory pressure. It shards parameters, gradients, and optimizer state and materializes parameters for computation (Zhao et al., 2023; PyTorch Contributors, 2026d). Large dense matrix multiplications can amortize those gather and reshard operations. For routed experts, however, the stored pool may be much larger than the weights used by any token. Olmo-core’s DDP path keeps assigned weights in device memory across microbatches to avoid repeatedly materializing that expert capacity.

ZeRO established the broader optimizer-state and gradient-partitioning design space (Rajbhandari et al., 2020). DeepSpeed-MoE then combined these ideas with expert parallelism and MoE-specific communication at scale (Rajbhandari et al., 2022). Olmo’s distributed optimizer belongs to this family, while its step ordering and multi-group reducer are specific to the implementation described here.

Keeping local compute weights materialized increases the persistent training-state footprint, so FSDP can remain useful for memory-constrained MoEs. EP can reduce that footprint by partitioning experts, but then selected token rows must travel to the ranks that hold them. How long full weights remain materialized and where experts are placed are separate decisions, which can in principle be composed in several ways. The current measurements do not fully isolate the cost of keeping assigned weights materialized from expert placement, so they establish neither a universal wall-time advantage nor a universal memory advantage over full-reshard FSDP.

Megatron-Core’s parallel folding allows dense and sparse portions of a layer to use different parallel mappings. Its MoE technical report (Yan et al., 2026) describes this design in Megatron-LM (NVIDIA, 2026d),

together with its interactions with dispatch, expert compute, load balance, memory, distributed optimization, checkpointing, reduced precision, and overlap.

Olmo-core represents the same dense-sparse distinction with a dense mesh and an MoE mesh with EP-DP and EP-MP axes. Comparing these mappings requires following their effects on gradient reduction, optimizer state, runtime caches, and checkpoint views.

23.3 Route Representations Trade Compactness for Regularity

A routed layer must represent a data-dependent number of token assignments. One design family packs tokens and launches variable-size collectives described by per-rank counts. This represents the accepted payload compactly, but a host-facing collective or grouped-GEMM interface can make GPU route counts part of the CPU launch dependency. Another family reserves bounded capacity and keeps a GPU-side map from each accepted route to its destination. That removes the split-list dependency, but requires capacity, route metadata, agreement, and a precisely defined overflow policy.

Tutel studies adaptive MoE dispatch and parallel placement across different cluster and model configurations (Hwang et al., 2023). MegaBlocks instead uses block-sparse kernels to preserve token assignments without padding every expert to the same capacity (Gale et al., 2023). These systems illustrate that token layout, communication, and expert-kernel shape must be considered together; the collective’s name alone determines none of their costs.

Megatron-Core presents token dispatch as a first-class backend choice, including collective and optimized alternatives (Yan et al., 2026; NVIDIA, 2026d). Olmo-core’s rowwise backend uses fixed-capacity route-indexed movement and GPU-side agreement, with communication payloads in preallocated symmetric buffers managed by the rowwise runtime. DeepEP supplies another optimized dispatch design and, in its v2 path, explicitly reduces the SM footprint devoted to communication (Zhao et al., 2025b).

A compact variable payload may expose a host dependency, while a bounded payload may reserve unused rows or drop overflow; an optimized GPU transport can also compete with expert compute for device resources. Comparing these representations requires holding accepted work and expert shape fixed, then accounting for host gaps, bytes, drops, capacity, and maximum-rank time.

Dynamic shape also raises a buffer-reuse question that transport APIs alone do not answer. A dispatched activation saved for Wgrad may outlive the call that moved it, especially under recomputation or a pipeline schedule. Olmo makes that dependency explicit with autograd-visible leases on symmetric payloads (Section 5.7). Keeping more dispatched activations for backward requires more simultaneous symm buffers. Reusing a buffer sooner saves memory, but is safe only after every consumer operator of its previous contents has finished.

23.4 Placement Determines Replica Groups

Once experts are partitioned, a local model part contains different kinds of replication. Dense parameters may agree over the folded dense group, while a local expert shard agrees only with copies of that shard. A system can encode that distinction in module decomposition, parallel mappings, reducer metadata, optimizer state, or some combination. The choice changes both the stored tensors and the gradient traffic for each rank.

Megatron-Core includes distributed optimization and checkpointing inside its MoE system boundary (Yan et al., 2026). Olmo-core uses a per-parameter process-group selector in its DDP reducer, carries the same parameter families into high-precision optimizer state, and exposes topology-independent checkpoint views. In the save-side measurement of Section 12, this path leaves peak memory at its pre-save values without assembling any full expert tensor on one GPU.

GShard and DeepSpeed-MoE likewise couple expert placement to the process groups that synchronize or shard model state (Lepikhin et al., 2021; Rajbhandari et al., 2022). Like Olmo-core, these systems derive their synchronization and sharding groups from the chosen parallel placement; Olmo-core differs in the particular reducer, optimizer-state, and checkpoint interfaces described here.

23.5 Conversion Costs and Communication-Compute Interference

Reduced precision lowers arithmetic, communication, or storage cost only by introducing another encoding of each model value. Megatron-Core treats reduced precision and recomputation as parts of its integrated MoE performance problem (Yan et al., 2026). In Olmo-core, FP32 main weights, optimizer states, and accumulated gradients determine the training update. BF16 compute weights and oriented MXFP8 weight caches are derived from those main weights; MXFP8 activation payloads are derived runtime representations. Conversion, cache refresh, transport, memory, and loss behavior are therefore all part of the BF16-versus-MXFP8 comparison; raw GEMM time alone does not characterize the training trade-off.

FP8 training and the later OCP microscaling formats provide the numerical and hardware context for this design (Micikevicius et al., 2022; Rouhani et al., 2023; Open Compute Project, 2023), and DeepSeek-V3 is the prominent production example of FP8 training with fine-grained block scaling (DeepSeek-AI et al., 2024). The Olmo-core-specific questions are where quantization occurs, which representations cross operator or communication boundaries, and whether the subsequent GEMM or transfer saves more time than the conversion takes.

DeepSeek-V3 and Megatron-Core issue token movement beside independent expert computation, but both expose the resource budget behind the overlap: DeepSeek-V3 assigns communication SMs and discusses cache/compute interference, while Megatron-Core conditions hiding on sufficient independent work and reports a GEMM cost from its SM carve-out (DeepSeek-AI et al., 2024; Yan et al., 2026). DeepEP v2 lowers communication’s SM footprint (Zhao et al., 2025b); fewer communication SMs do not guarantee that concurrent kernels retain standalone speed.

COMET makes the same concern explicit: coarse waves and separate-stream scheduling can reduce expert-compute efficiency, motivating finer-grained fused resource control (Zhang et al., 2025). A broader distributed-training study observes compute stretch under communication while still finding overlap beneficial on average in its own suite (Lee et al., 2025). These results depend on how resources are allocated for the measured shape, transport, and platform.

Lancet schedules MoE communication and computation jointly, while MegaScale-MoE combines several parallel and communication optimizations for large training runs (Jiang et al., 2024b; Jin et al., 2025). Both treat overlap as a scheduling and resource-allocation problem, with explicit coordination between communication and compute.

Olmo evaluates overlap in two separate studies. A model-level two-batch overlap (TBO) study evaluates two lanes in flight. A separate same-batch EP-wave study compares overlap with both a wave-sequential control and an unsplit no-wave baseline. The unsplit baseline is needed because an overlapped timeline can still lose to a larger, more efficient unsplit GEMM.

23.6 Expert Placement Connects Token Movement and Updates

Olmo-core combines resident rank-local compute weights with route-indexed token movement and replica-specific updates. EP determines which experts a rank stores and which token rows it receives; the reducer synchronizes each expert’s gradients only with replicas of that expert. Keeping those choices consistent is what lets the resident-weight design extend from forward execution to optimizer updates and checkpoint export.

24 Conclusion

Olmo-core’s DDP stack reduces the parameter movement and host synchronization that made our early MoE baselines slow. In the capacity sweep, the composed DDP and EP stack keeps throughput within a modest margin of the dense reference as the expert pool grows. Separate production-scale runs cover a 12.9-billion-parameter model on 16 GPUs through a 1.2-trillion-parameter model on 512 GPUs. Those headline rates use random routing and different operating configurations; they demonstrate the stack’s capacity and throughput, not a controlled scaling curve or a time-to-quality result.

24.1 Reducing Costs That Repeat Across the Step

Sparse routing limits the arithmetic per token, but it does not by itself limit weight movement, gradient traffic, or optimizer memory. Keeping rank-local model partitions resident removes repeated weight materialization; EP reduces the expert parameters held by each rank and routes token rows to them instead. The trillion-parameter recipes also need sharded optimizer state, MXFP8 storage, and per-layer recompute to fit in device memory. These changes affect both how fast a configuration runs and whether it fits at all.

An operation’s total cost scales with how often it runs. Routing runs for every token in every MoE layer, buffer allocation and reuse must accommodate each microbatch, and kernel launches repeat on every rank. In the original MoE path, all-to-all split sizes and grouped-GEMM group sizes both required routing counts on the CPU. Copying those counts back to the host repeatedly interrupted submission of GPU work. Device-resident metadata removes these two recurring waits without changing the routing calculation.

A bandwidth budget can also rule out an optimization before implementation. For the routed block analyzed in the offload study, the estimated activation production rate is about six times the theoretical host-link bandwidth. Scheduling can shift when copies occur, but cannot sustain full offload at that production rate. This is a bandwidth budget for the stated workload and link, not a claim that all forms of activation offload are ineffective.

24.2 What the Measurements Do and Do Not Establish

Several optimizations looked promising in isolation but offered little or no end-to-end benefit. Communication and expert compute can overlap on a timeline while slowing each other through resource contention. Quantizing attention projections made their GEMMs faster, but conversion and layout work consumed much of the benefit in the complete step. In the weight-gradient prototype comparison, global dequantization followed by tuned BF16 grouped GEMM was faster than preserving the natural MXFP8 scale layout, despite adding a conversion kernel. Component timings explain these outcomes; they cannot replace a measurement of the full execution path.

Even a kernel benchmark needs more than shapes and dtypes to be reproducible. We measured different GEMM times with identical shapes, layouts, and precision when the operand values changed. The effect was measured only at the kernel level, but it changes how we construct and interpret microbenchmarks.

A related measurement problem arises in load balancing. The Switch-style scalar is a cross-term between soft router scores and hard expert counts. It can decrease as soft score mass shifts even when the requested routes remain imbalanced. A lower scalar therefore does not establish better load balance. Requested and kept route counts must be inspected directly; the scalar’s value, its gradient, and the resulting routing behavior are distinct parts of the analysis.

24.3 Precision, Memory, and Scheduling Interact

MXFP8 affects more than GEMM time: it reduces EP payloads and saved activations, and changes the operand layouts required by the GEMMs. Recomputing a routed block repeats dispatch and combine as well as expert arithmetic. Concurrent dispatch and expert kernels share SMs, caches, and memory bandwidth. These interactions explain why the combined recipe must be measured even when each component has already been benchmarked.

Pipeline scheduling adds a correctness constraint. Activations from several microbatches can remain live for backward, along with the communication payloads they reference. Those buffers can be reused only after the last consumer has finished, even if their addresses are fixed for graph replay (Sections 5.7 and 15).

These dependencies need to be explicit at component interfaces. A quantizer must produce a layout the transport and GEMM can consume without avoidable conversion. A buffer pool must be sized for the pipeline schedule’s maximum concurrency, not just one forward pass. Device memory, SM capacity, network bandwidth, and host submission time all constrain the same training step. We report unsuccessful optimizations as well as adopted ones because a small timing gain may not justify the additional scheduling or memory complexity.

24.4 What Carries Forward

The measured crossovers are specific to the hardware and configurations in this report. A different fabric, expert shape, or GEMM implementation can change whether overlap helps. Faster activation production would make full offload harder if host-link bandwidth stayed fixed; a different link or a more selective offload policy changes that calculation. Reusing a result requires checking those conditions, including the frequency of each cost and the maximum number of live microbatches.

The training mechanisms also offer a starting point for the learner in supervised fine-tuning, preference training, and reinforcement learning. Those workloads add different combinations of frozen models, generation, and data movement; the pretraining measurements do not establish their end-to-end performance. Routing, expert shapes, and operand values also matter for the surrounding inference systems; this report makes no claim about inference performance.

The result of this work is a training stack with substantially less repeated parameter movement, GPU-resident routing metadata, and memory policies that support trillion-parameter configurations. Its performance depends on how these mechanisms are combined. The configurations, profiles, and negative results in this report document those dependencies so that subsequent changes can be evaluated against the complete training step.

Acknowledgments

This material is based upon work supported by the National Science Foundation under Award No. 2413244.

Appendices

A Kernel Interfaces and Profiling Reference

This appendix documents the interfaces and profiling methods used by the expert-parallel, grouped-GEMM, and MXFP8 implementations (Sections 5, 9, and 11). It records the operation boundaries, payload requirements, and measurements needed to reproduce and maintain these paths.

A.1 Rowwise Dispatch and Combine Use PUT/GET

The rowwise operation stack has four conceptual levels: model-level MoE phase, Python autograd function, Python C++/CUDA extension wrapper, and CUDA kernel using NVSHMEM PUT/GET primitives (NVIDIA, 2026t,h).

The phase name does not determine the transport primitive; dispatch and combine each use PUT in one direction and GET in the other:

MoE phase	Transport	Why
Dispatch forward	PUT	Source-token rank holds the input row and pushes it to the rank that stores the selected expert.
Combine forward	GET	Source-token rank produces the combined output and pulls expert rows back.
Combine backward	PUT	Source-token rank pushes weighted output gradients to expert-output gradients.
Dispatch backward	GET	Source-token rank pulls route gradients and sums them into token gradients.

The autograd node names below are private implementation classes and change with the code; the wrapper names are the stable interface. The BF16 separate autograd nodes are:

Autograd node	Forward wrapper	Backward wrapper
<code>_DispatchRowwiseAutograd</code>	<code>rowwise_dispatch_put</code>	<code>rowwise_combine_get</code>
<code>_RowwiseCombineWeightedAutograd</code>	<code>rowwise_combine_get</code>	<code>rowwise_dispatch_put</code>

The FP8 separate autograd nodes are:

Autograd node	Forward wrapper	Backward wrapper
<code>_DispatchRowwiseFP8Autograd</code>	<code>rowwise_dispatch_put_scaled</code>	<code>rowwise_combine_get_scaled</code>
<code>_RowwiseCombineWeightedFP8Autograd</code>	<code>rowwise_combine_get_scaled</code>	<code>rowwise_dispatch_put_scaled</code>

The fused FP8 node, `_RowwiseFP8DispatchExpertsCombineAutograd`, exposes the whole routed expert region as one autograd node. Its forward half covers scaled rowwise dispatch, up/gate scaled grouped GEMM, SwiGLU, down scaled grouped GEMM, and scaled rowwise combine. Its backward half runs the adjoint sequence: combine backward through scaled dispatch, down dgrad/wgrad, SwiGLU backward, up/gate dgrad/wgrad, and dispatch backward through scaled combine.

A.2 Rowwise Wrappers Enforce Runtime Requirements

The main Python wrappers are:

Wrapper	Requirement
<code>rowwise_dispatch_put</code>	Push rows from local <code>input</code> to peer <code>out</code> according to <code>dst_ranks</code> and <code>dst_rows</code> ; optional <code>probs</code> applies route weighting.
<code>rowwise_dispatch_put_scaled</code>	Quantize high-precision rows to MXFP8 qdata/scales, then PUT qdata and scales into separate peer buffers.
<code>rowwise_combine_get</code>	GET remote expert rows into local route scratch and reduce $[N, K, D]$ into $[N, D]$, optionally weighted by route probabilities.
<code>rowwise_combine_get_scaled</code>	GET qdata and scales, dequantize/reduce locally, and optionally save gathered routes for router-probability gradients.
<code>rowwise_gather_get</code>	One-to-one GET helper used by scaled combine and other route-gather cases.
<code>rowwise_combine_get_fused</code>	BF16/half extension path that combines GET and reduction in one CUDA kernel.

The regular path materializes two physical route tensors, `dst_ranks` $[N, K]$ and `dst_rows` $[N, K]$, where N is the number of local token rows (the T of Section 5.4) and K is top- K . Combine wrappers may pass those same tensors under source-oriented argument names; there are not four independent route maps.

Invalid routes use negative rank or row values. PUT kernels skip invalid routes. BF16 combine can zero-fill invalid gathered rows. FP8 scaled combine masks invalid routes before reduction.

The usual barrier defaults are:

Operation	Pre-barrier	Post-barrier
Dispatch PUT	false	true
Combine GET	true	false

Call sites may override these defaults when TBO, buffer reuse, or lease release order requires a different synchronization point.

A.3 CUDA/NVSHMEM Kernels Operate per Route

The rowwise CUDA implementation is route-oriented. A route id is `token_row * top_k + k`.

The important CUDA kernels are:

CUDA kernel	Transport primitive	Role
<code>dispatchRowsPut</code>	<code>nvshmemx_putmem_warp</code>	Unweighted row dispatch PUT.
<code>dispatchRowsPutWeighted</code>	<code>nvshmemx_putmem_warp</code>	Weighted row PUT when route probabilities are supplied.
<code>gatherRowsGet</code>	<code>nvshmemx_getmem_warp</code>	Gather remote rows into local route scratch.
<code>combineRowsReduceKernel</code>	local CUDA	Reduce gathered $[N, K, D]$ into $[N, D]$.
<code>combineRowsGetKernel</code>	<code>nvshmemx_getmem_warp</code>	Optional fused BF16/half GET plus reduce path.

For dispatch, each route derives the source row, peer rank, and destination row, then PUTs `input[src_row]` into `out[dst_row]` on the peer. For gather/combine, each route derives the peer and source row, GETs `expert_out[src_row]` into local route scratch, and reduces gathered `[token_row, :, :]` routes into `output[token_row, :]`.

A.4 FP8 Transport Requires Compatible Layouts

Rowwise FP8 communication carries two payload families: MXFP8 qdata and MXFP8 row scales, usually with block size 32. BF16 dispatch writes `dispatch_out[capacity_rows, hidden]`, while FP8 dispatch writes `dispatch_out_q[capacity_rows, hidden]` and `dispatch_out_scales[capacity_rows, hidden / block_size]`.

The exact scale layout depends on the consuming grouped GEMM path, not just the numerical format. Transformer Engine, for example, uses different scale layouts for communication and GEMM and swizzles between them (NVIDIA, 2026w). In Olmo’s rowwise path, the received qdata and scales are passed to grouped GEMM through its prequantized-LHS interface. This reuses the quantized payload; the consumer still converts unblocked row scales to its blocked GEMM layout.

A.5 Blackwell MXFP8 Uses Block-Scaled Tensor Core MMA

Three related terms describe different levels of the MXFP8 compute path. Olmo calls PyTorch’s `scaled_mm` operator and requests a BF16 result. The selected device kernel implements a tiled general matrix multiplication (GEMM), including operand movement, a Tensor Core main loop, and an output epilogue. Within that main loop, the Blackwell instruction-level primitive is the fifth-generation Tensor Core matrix multiply-accumulate (MMA), exposed by the PTX `tcgen05.mma` family (NVIDIA, 2026j,u).

Level	Term and responsibility
PyTorch operator	<code>scaled_mm</code> : accepts qdata and scale tensors, selects a backend, and returns the requested output dtype.
Device kernel	Block-scaled GEMM: tiles the matrices, moves operands and scales, runs the reduction over K , and applies the output epilogue.
Tensor Core instruction	<code>tcgen05.mma</code> : computes one matrix tile update into an accumulator.

Table 40 Operator, kernel, and instruction levels of MXFP8 GEMM. The operator, kernel, and instruction names refer to different levels of the same MXFP8 matrix multiplication.

For BF16 operands, the corresponding Blackwell instruction family uses the `kind::f16` modifier. Native MXFP8 uses `kind::mxf8f6f4` together with `block_scale`; its full PTX family includes the choice of one- or two-CTA execution:

```
tcgen05.mma.cta_group::{1|2}.kind::mxf8f6f4.block_scale.
```

For the MXFP8 case, the instruction applies the two block-scale tensors during the reduction. Its numerical operation is

$$D_{ij} = C_{ij} + \sum_{k=0}^{K-1} \left(S_{i, \lfloor k/32 \rfloor}^{(A)} A_{ik} \right) \left(S_{\lfloor k/32 \rfloor, j}^{(B)} B_{kj} \right), \quad (87)$$

where each E8M0 entry in $S^{(A)}$ or $S^{(B)}$ scales a block of 32 consecutive E4M3 values along the GEMM- K dimension. The logical scale grids shown in Figure 47 are the operator-facing view. The Blackwell main loop stages qdata in shared memory, copies scale factors into Tensor Memory, and keeps the FP32 accumulator in Tensor Memory; the scale grids must therefore be swizzled into the blocked physical layout expected by the kernel (NVIDIA, 2026u).

The raw block-scaled MMA does not directly define a BF16 result. It updates an FP32 accumulator in Tensor Memory. The GEMM epilogue reads that accumulator and converts it to the output dtype requested by `scaled_mm`. In the current Olmo path, that requested dtype is BF16.

A.6 Availability of Device-Side Grouped GEMM

The PyTorch source snapshot audited for this report distinguishes the public grouped-matrix-multiplication operation from the backend selected at runtime. For CUDA, the architecture gate used by the device-offset fast path admits only compute-capability major versions 9 (SM90) and 10 (SM100 family) (PyTorch Contributors, 2026i). Table 41 summarizes the resulting behavior.

The BF16 fallback makes the behavioral difference explicit: it calls `offs.cpu()` and then launches one matrix multiplication per group (PyTorch Contributors, 2026j). The fast CUDA implementation, by contrast, instantiates CUTLASS SM90 and SM100-family grouped kernels. This is a boundary of the current PyTorch

PyTorch entry point	CC major 9 or 10	Other CUDA architectures
BF16 <code>torch._grouped_mm</code>	Device-offset fast path; no offset copy to the host	Host-loop fallback; offsets are copied to the CPU before the per-group GEMMs
Scaled <code>torch._scaled_grouped_mm</code>	Architecture gate passes	Rejected by the architecture gate rather than routed to the host-loop fallback

Table 41 Architecture availability in the audited PyTorch snapshot. The gate checks the compute-capability major version, so B300 at 10.3 follows the major-10 path, while SM120 at 12.0 does not.

integration, not evidence that SM120 lacks Tensor Core matrix multiplication. The CUTLASS source bundled with the same PyTorch snapshot contains an SM120 grouped-GEMM example (NVIDIA, 2026n), and Table 21 records the SM120 `mma.sync` instruction family. In particular, the restriction is not a lack of “WMMA” support: WMMA is a programming interface, while the underlying matrix-instruction family differs across GPU architectures.

A.7 Common Grouped-GEMM Shapes in Training

The matrix row count seen by grouped GEMM follows the rank-local microbatch and the routing multiplicity. For B_μ sequences of length L and top- K routing, balanced expert parallelism gives

$$M_{\text{rank}} \simeq B_\mu LK, \quad \overline{M}_e = \frac{M_{\text{rank}}}{N_{\text{local}}}, \quad N_{\text{local}} = \frac{N}{M_E}. \quad (88)$$

The EP degree does not divide M_{rank} : an EP-MP group of size M_E contributes that many source microbatches before distributing the routed rows over the same number of destination ranks. Table 42 shows the resulting shapes for representative training configurations. Shared-expert computation is separate, and load imbalance can move an individual rank away from the balanced expectation.

Scale	Rank-local microbatch		Expert layout				Projection		Routed rows	
	B_μ	L	K	M_E	N	N_{local}	d	h	M_{rank}	$\overline{M}_e$
Small-2	3	8K	4	8	64	8	2048	2560	96K	12K
Small-3	4	4K	8	8	64	8	2048	2560	128K	16K
Small-4	3	8K	8	8	128	16	1536	1536	192K	12K
Medium-2	3	8K	4	8	128	16	3584	4096	96K	6K
Large-2	1	8K	4	8	128	16	6144	8192	32K	2K
Ultra-2	2	8K	4	32	128	4	8192	10240	64K	16K

Table 42 Common grouped-GEMM shapes in training. d is the model width and h is the routed-expert hidden width. M_{rank} is the expected valid routed-row count received by one EP rank, and $\overline{M}_e$ is the corresponding mean per local expert. A capacity-padded BMM at factor 1.25 executes approximately $1.25\overline{M}_e$ rows per expert. Total routed rows alone do not define the complete GEMM shape because local-expert count and projection dimensions also vary. Row names indicate approximate model scale only; these representative shapes are not the measured configurations of Section 14.

The smaller configurations in the table use expert widths between 1536 and 2560 and route 96K–192K rows per rank. To complement the $d = h = 4096$ result in the main text, we repeat the same isolated BF16 projection benchmark with $d = h = 2048$, 16 local experts, and $M = 4\text{K}$ through 256K. The BMM path again executes exactly $1.25\times$ per-expert capacity. Its regular kernel is faster at 4K and 8K total rows; grouped GEMM becomes faster between 8K and 16K and remains faster through the rest of the sweep. At 128K total rows, BMM takes 15.4% longer.

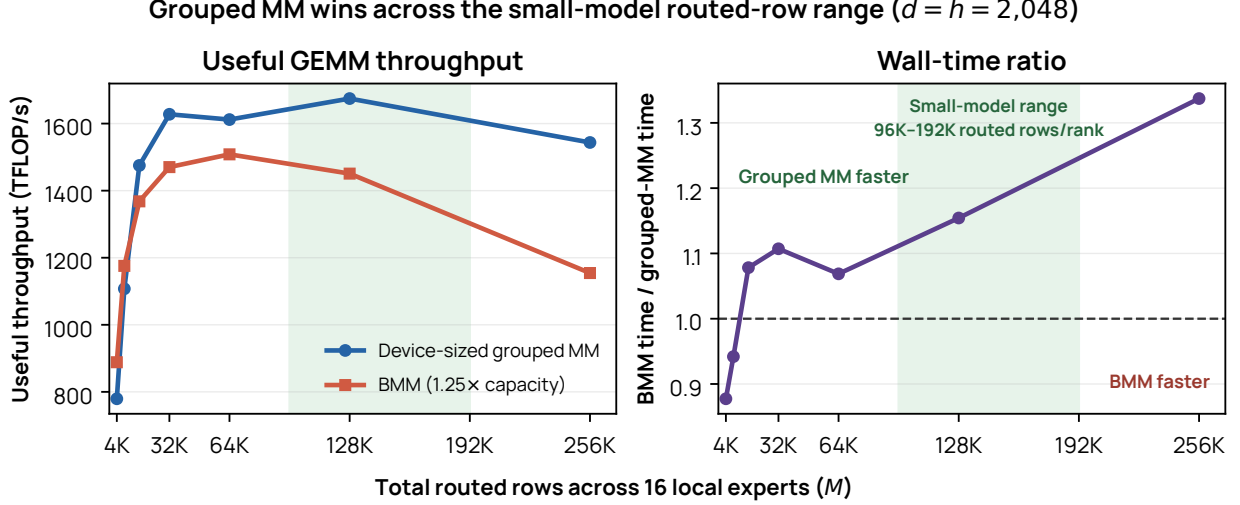


Figure 71 Grouped GEMM also wins across the small-model training range. This one-B300 experiment fixes 16 local experts and a square BF16 projection with $d = h = 2048$. The green band marks the 96K–192K routed-row range represented by the small configurations in Table 42; their exact widths and local expert counts vary, so the band is an operating-range guide rather than an exact reconstruction of every model. BMM reserves $1.25\times$ capacity per expert, while grouped GEMM executes only valid rows. Each point averages 20 queued CUDA-event samples after 10 warm-ups.

A.8 Equal Compute Can Require More HBM Traffic

Small expert batches perform less arithmetic per weight load. A roofline model makes this limit explicit before routing, synchronization, or kernel scheduling overhead is counted. For one GPU operation, let F_g be its arithmetic work, Q_g its high-bandwidth memory (HBM) traffic, T_g its elapsed time, and $I = F_g/Q_g$ its arithmetic intensity. With compute ceiling C_{peak} and HBM bandwidth ceiling B_{HBM} , the idealized roofline gives (Austin et al., 2025)

$$T_g \geq \max\left(\frac{F_g}{C_{\text{peak}}}, \frac{Q_g}{B_{\text{HBM}}}\right), \quad \frac{F_g}{T_g} \leq \min(C_{\text{peak}}, IB_{\text{HBM}}). \quad (89)$$

For a BF16 expert projection $[M_e, d_{\text{in}}][d_{\text{in}}, d_{\text{out}}] \rightarrow [M_e, d_{\text{out}}]$, M_e is the token-row count and $d_{\text{in}}, d_{\text{out}}$ are the input and output widths. For this forward projection, reading both operands once from HBM and writing a BF16 result gives

$$I = \frac{2M_e d_{\text{in}} d_{\text{out}}}{2(M_e d_{\text{in}} + d_{\text{in}} d_{\text{out}} + M_e d_{\text{out}})}. \quad (90)$$

When $M_e \ll d_{\text{in}}, d_{\text{out}}$, this is approximately M_e FLOP/byte: fewer rows per expert reduce weight reuse. For a stated BF16 compute reference and HBM bandwidth, the balance point is

$$I_{\star} = \frac{C_{\text{BF16}}}{B_{\text{HBM}}} \text{ FLOP/byte}. \quad (91)$$

Under this HBM traffic model, even a zero-overhead projection below that intensity cannot reach the compute peak. Cache reuse, tiling, operand precision, and actual HBM traffic change the bound. This compute–bandwidth balance point is distinct from the measured grouped-GEMM-versus-BMM crossover in Section 9.6.

Dense and MoE forward GEMMs with equal FLOPs. Figure 2 fixes the original token count T , input width d , and useful GEMM FLOPs. The dense FFN has hidden width Kh ; the MoE has E experts of hidden width h and selects K per token. Assume balanced routes with every expert used, so each expert receives $M_e = TK/E$ rows. Dense executes the fused up/gate product $[T, d][d, 2Kh]$ followed, after the pointwise activation, by the

down product $[T, Kh][Kh, d]$. Grouped GEMM executes E corresponding pairs with shapes $[TK/E, d][d, 2h]$ and $[TK/E, h][h, d]$. Both perform

$$F_{\text{up}} = 4TKdh, \quad F_{\text{down}} = 2TKdh, \quad F_{\text{pair}} = 6TKdh. \quad (92)$$

For BF16 arrays, Table 43 counts the bytes read and written by these GEMMs. The MoE inputs are separate, already-materialized route rows; the writes that created them are outside this accounting. The down GEMM writes TK output rows before combine, whereas dense writes T ; combine is not folded into these GEMM writes.

HBM traffic category	Dense bytes	MoE bytes	MoE / dense
Weight reads	$6Kdh$	$6Edh$	E/K
FFN input reads	$2Td$	$2TKd$	K
Output writes, before combine	$2Td$	$2TKd$	K
Up/gate writes + down input reads	$6TKh$	$6TKh$	1

Table 43 More HBM traffic for the same forward GEMM FLOPs. One-read HBM accounting for BF16 inputs, weights, and outputs. Each ratio compares a single category, not total HBM traffic. The last row counts only GEMM-side accesses to hidden activations, not the pointwise activation’s own reads and writes.

The equal last-row count follows from the matched-compute widths, not from eliminating MoE intermediates. Dense produces $[T, 2Kh]$ up/gate values and consumes $[T, Kh]$ activated values; the corresponding routed tensors are $[TK, 2h]$ and $[TK, h]$. Each pair has equal element counts. In a grad-enabled BF16 forward, both paths execute a separate SwiGLU expression between the GEMMs. Its own accesses, any temporary tensors, and cache effects are outside the GEMM-only model; tensor shapes alone do not establish measured HBM traffic.

For each layout, separate the HBM bytes of the two GEMMs:

$$\begin{aligned} Q_{\text{dense,up}} &= 2(Td + 2Kdh + 2TKh), & Q_{\text{dense,down}} &= 2(TKh + Khd + Td), \\ Q_{\text{MoE,up}} &= 2(TKd + 2Edh + 2TKh), & Q_{\text{MoE,down}} &= 2(TKh + Ehd + TKd). \end{aligned} \quad (93)$$

The two GEMM passes are sequential, so their modeled times add:

$$\hat{t} = \sum_{j \in \{\text{up,down}\}} \max\left(\frac{F_j}{C_{\text{BF16}}}, \frac{Q_j}{B_{\text{HBM}}}\right), \quad \hat{R} = \frac{F_{\text{pair}}}{\hat{t}}. \quad (94)$$

The figure plots $\hat{R}/C_{\text{BF16}}$ as T varies, with $E = 64$, $K = 4$, and $d = h = 4096$. It uses the nominal B300 BF16 compute-to-HBM-bandwidth ratio (NVIDIA, 2026r,b); the vertical axis labels the common reference as peak FLOPs, not an achievable kernel rate. This is a roofline expressed against token count rather than arithmetic intensity. The hardware reference is identical; the different HBM byte counts produce different curves. At small batches, weight reads dominate and MoE reuses each weight across only TK/E tokens instead of T . Larger batches amortize those reads, and both modeled curves eventually reach the common compute ceiling for these widths.

The HBM traffic model defines the scope. This is a single-GPU forward GEMM-pair comparison, not the complete FFN or training step. Balanced, all-used routing is an analytical assumption, not a guarantee for random or learned routes. Equal FLOPs do not imply equal parameter capacity or model quality. The model assumes no cache reuse between operand arrays and omits tiling-induced rereads; caching or fused indexed input access can reduce the counted HBM traffic, while rereads can increase it. Packing, route merging, activation functions, backward, inter-GPU communication, gradient synchronization, and optimizer work are excluded. Fusion or pipelining across the two GEMM passes can change their HBM traffic and timing. The curves are ceilings within these assumptions, not measured rates or an end-to-end MFU bound. Measured projection efficiency appears in Section 9.6.

A.9 The Maximum Load Does Not Specify the Expert Histogram

The maximum-to-mean ratio $I_{\max}$ records only the largest expert load. It does not record how much work is concentrated among the other experts. Figure 72 constructs a direct counterexample with 16 local experts. The matched single-spike assignment gives one expert 31.67% of all rows and divides the remainder across 15 experts. The three-hot assignment gives the same number of rows to each of three experts, so those three receive approximately 95% in total and the other 13 divide the remaining 5%. After eight-row alignment, both have $I_{\max} \approx 5.07$, the same total rows, and the same useful FLOPs.

The three-hot assignment has lower mean grouped GEMM throughput at all four row counts. Its additional loss relative to the matched single spike ranges from 3 to 11 percentage points. The condition ranges overlap at some shapes, so the experiment does not make $I_{\max}$ or any other single summary a complete timing model. It establishes the narrower point: two assignments with the same maximum load can present different collections of matrix problems to grouped GEMM and take different amounts of time.

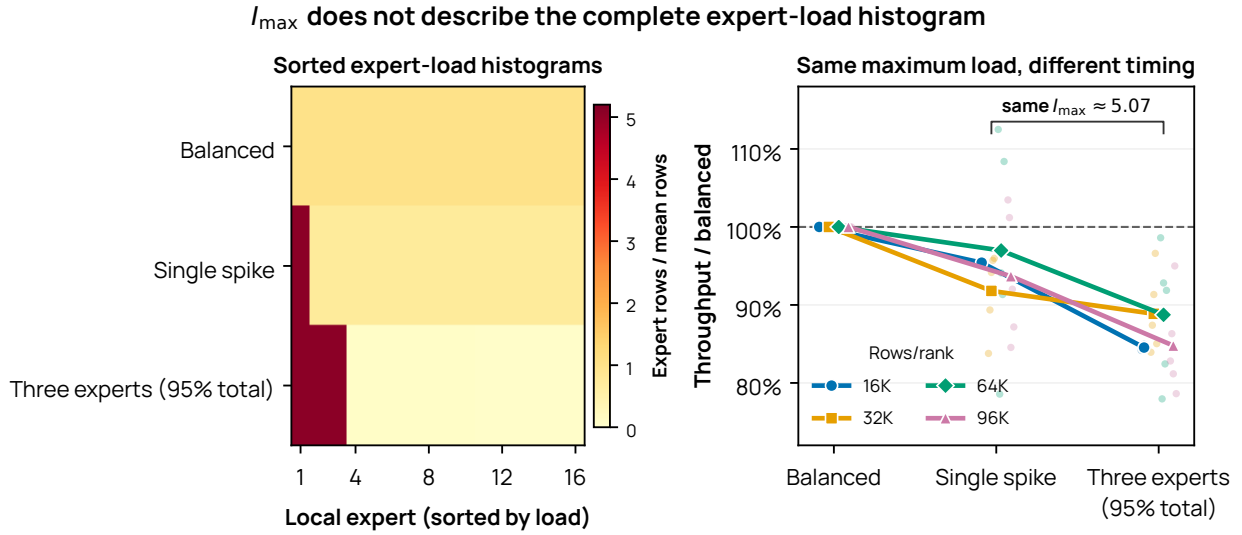


Figure 72 The same $I_{\max}$ can describe different grouped GEMM workloads. **Left:** sorted expert loads for a representative 64K-row case. **Right:** rank-local grouped GEMM throughput normalized to the balanced assignment in the same process. Large markers report arithmetic means, while small translucent points show five independent runs on the same B300. In each run, let a be the base expert index. The matched single spike overloads expert a , while the three-hot assignment overloads experts $(a, a + 5, a + 10) \bmod 16$; the five values of a are 0, 3, 6, 9, and 12. Every run averages 20 queued CUDA-event samples after 10 warm-ups. The benchmark isolates one BF16 $d = h = 4096$ projection and excludes dispatch, communication, and cross-rank waiting.

A.10 Grouped-GEMM Capacity Benchmark Details

The benchmark in Section 9 uses 16 local experts, $d = h = 4096$, and BF16 operands. It isolates one square forward projection and compares exact device-sized grouped GEMM with BMM at $C = \lceil 1.25 \overline{M}_e \rceil$ rows per expert. We fix capacity at 1.25 times the mean rather than the observed maximum, so balanced routes still incur the configured padding. Both paths receive the same seeded valid activations and expert weights and write into preallocated outputs. Routing, communication, activation functions, and backward are outside the timed region, so the result identifies a kernel crossover rather than predicting complete expert-MLP time.

The raw per-call timings, validation output, and manifests are retained in the experiment package bundled with this report.

A.11 Matched Grouped-Dense Projection Benchmark

This benchmark compares three mathematically equivalent BF16 projections. We initialize one canonical $W_{\text{dense}} \in \mathbb{R}^{8192 \times 81920}$ and partition its output columns in two ways: four expert matrices of shape 8192×20480 , or eight expert matrices of shape 8192×10240 . Both grouped layouts contain the exact dense BF16 values. One seeded input X is physically repeated for each grouped problem, and sampled output rows match bitwise at every measured T .

All three paths execute $2T \times 8192 \times 81920$ useful FLOPs and access the same number of weight and output elements. They do not have identical input traffic: the grouped paths supply X to four or eight GEMMs. The experiment isolates this projection and excludes the activation function, down projection, routing, communication, shared experts, and backward.

We sweep powers of two from $T = 1$ through 65536 in eight paired trials, one on each of eight B300 GPUs. Every GPU measures both grouped partitions and their corresponding dense controls; partition order and backend order are counterbalanced. After ten direct warm-up calls, calibration chooses an adaptive CUDA Graph work unit targeting approximately 100 ms per replay. Each backend then receives a three-second pilot and a final batch containing at least eight seconds of uninterrupted same-path conditioning immediately followed by at least 1.5 seconds of measurement. The host submits both phases behind one device gate before releasing the GPU, with no synchronization or bookkeeping at the phase boundary.

T	Dense	4 experts	4 / dense	8 experts	8 / dense
1	7	4	0.588	4	0.620
16	111	67	0.601	68	0.608
128	854	520	0.608	548	0.643
256	1126	1086	0.964	1085	0.963
512	1293	1236	0.956	1230	0.951
1024	1381	1306	0.945	1298	0.941
2048	1422	1356	0.953	1350	0.949
4096	1401	1335	0.953	1331	0.950
8192	1416	1252	0.884	1250	0.882
16384	1412	1186	0.840	1184	0.839
32768	1413	1168	0.827	1169	0.827
65536	1411	1167	0.827	1167	0.827

Table 44 Absolute useful throughput for the matched projections, in TFLOP/s. Each grouped column is the mean over eight paired trials on eight B300 GPUs. Every GPU measures the identical dense control with both grouped partitions; the dense column first averages that pair per GPU, then averages the eight GPU-level values. Ratios use the paired dense measurement from the corresponding grouped trial. Rows show a subset of the 17 swept token counts.

Both grouped layouts approach the dense projection at $T = 256$ and sustain roughly 94–96% of dense throughput through $T = 4096$. Their close agreement shows that dividing the fixed projection into eight half-width GEMMs adds little cost beyond the four-way partition in this range. At 32K and 64K, all paths operate under the software power limit and grouped throughput settles at approximately 82.7% of dense, or 1.17 versus 1.41 PFLOP/s. These oversized cases diagnose large-matrix behavior; they are not representative training shapes.

A.12 Very Large Grouped GEMMs Enter a Power-Limited Clock Regime

The main sweep stops at $M = 128\text{K}$ total rows, or $M_e = 8\text{K}$ rows per local expert. We separately stress-tested $M_e = 4\text{K}$ through 32K, reaching 512K total rows across 16 experts. The 16K and 32K per-expert cases are deliberately outside realistic Olmo training shapes; they expose the power-and-clock response behind the large-shape throughput decline.

The diagnostic uses eight counterbalanced trials across four B300 GPUs. Each backend and shape receives an uninterrupted three-second pilot followed by an eight-second conditioning region and a 1.5-second measured region. Shape and backend order vary across trials. The host submitted work at least 25 times faster than the

GPU executed it, so CPU launch gaps were not on the measured path. All trials used the same initialization method, and grouped GEMM and BMM received identical valid activations and expert weights.

Figure 73 shows the relevant comparison. From $M_e = 4\text{K}$ to 32K , median grouped GEMM throughput falls from 1366 to 1163 TFLOP/s while its median SM clock falls from 1174 to 960 MHz. Per-trial useful throughput per MHz (each trial’s throughput divided by its mean SM clock) has per-shape medians between 1.16 and 1.19 TFLOP/s/MHz. The equal-FLOP dense control remains approximately flat at 1.41–1.42 PFLOP/s, and the unplotted capacity-BMM control remains approximately flat at 1.21–1.22 PFLOP/s.

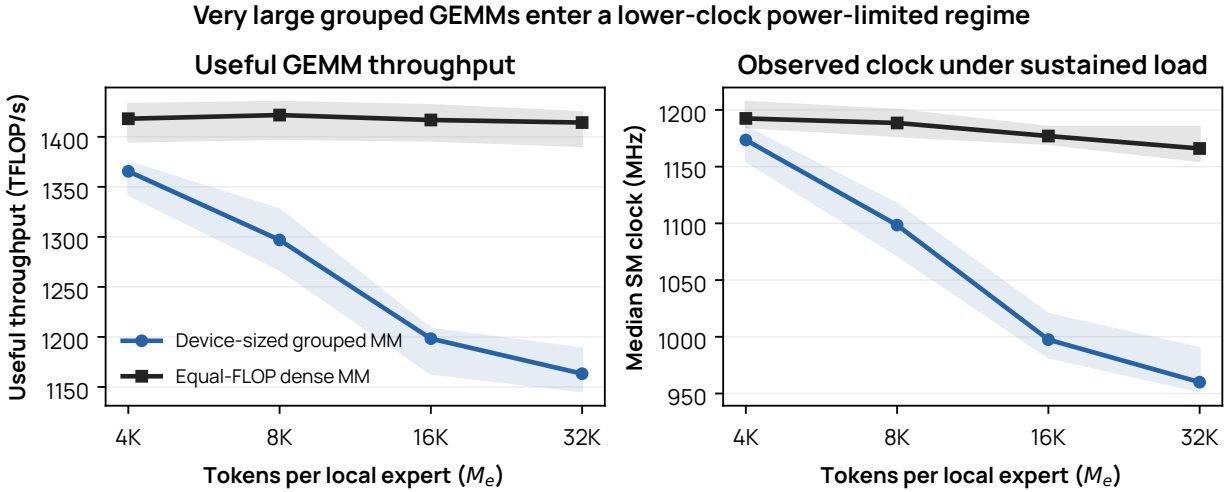


Figure 73 The very-large- M_e grouped GEMM slowdown follows SM clock, not per-clock efficiency. Lines show medians and bands show the full range across eight trials. Both paths execute the same useful FLOPs, although the dense control reuses one weight matrix while grouped GEMM reads 16 expert matrices. The software power-cap limiter was active in 99.3% of telemetry samples; no thermal, hardware-brake, or reliability limiter was observed.

Nsight timelines at $M_e = 2\text{K}$ and 32K show the same CUTLASS grouped-GEMM kernel template. Together with the nearly constant throughput per MHz, this rules out a high- M_e dispatch change and provides no evidence of an algorithmic scaling collapse. Instead, sustained very-large grouped GEMMs settle at a lower clock while operating near the 1.1 kW board power limit. The precise microarchitectural reason for this lower operating point is not established. These extreme-shape timings need to be interpreted alongside clocks, power, and operand values.

A.13 Grouped Kernels Accept Managed Buffers

The BF16 grouped GEMM wrapper accepts explicit buffers:

```
grouped_mm(
    mat_a,
    mat_b,
    offs=expert_offsets,
    out=optional_forward_output,
    input_grad_out=optional_dgrad_output,
)
```

The explicit `out` and `input_grad_out` buffers matter because expert compute often writes into buffers whose reuse point is chosen by the MoE runtime rather than by the PyTorch allocator.

The MXFP8 grouped GEMM wrapper has two important forms:

```
scaled_grouped_mm_q(
    mat_a,
    mat_b,
    offs=expert_offsets,
    prequantized_lhs=optional_lhs_q_scales,
    prequantized_rhs=optional_rhs_q_scales,
    prequantized_rhs_for_dgrad=optional_transposed_rhs_q_scales,
)
```

and:

```
scaled_grouped_mm_q_fp8_weight(
    mat_a,
    grad_anchor,
    offs=expert_offsets,
    prequantized_lhs=optional_lhs_q_scales,
    prequantized_rhs=required_rhs_q_scales,
    prequantized_rhs_for_dgrad=required_transposed_rhs_q_scales,
    wgrad_sink=optional_fp8_weight_grad_sink,
)
```

Forward and dgrad can use the scaled grouped GEMM backend. Wgrad has a different current policy: the fused rowwise path dequantizes the required operands, executes BF16 `F.grouped_mm`, and accumulates the result into the FP8-weight gradient buffer. The integrated path has no native MXFP8 grouped Wgrad.

A.14 Fused FP8 Autograd Saves the Values Needed by Backward

The fused rowwise FP8 autograd node primarily prevents communication and expert buffers from being reused before backward finishes. When its configurable SwiGLU-recompute mode is enabled, it saves:

- route maps and route probabilities
- optional gathered combine routes for router-probability gradients
- `up_gate_q/scales` for SwiGLU backward and BF16 SwiGLU recompute
- dispatched input `dispatch_out_q/scales` for up/gate wgrad
- grouped GEMM offsets

In that mode, backward restores BF16 `up_gate`, recomputes `h = swiglu(up_gate)`, and uses the recomputed value for down Wgrad. The configuration default enables this policy, but the production recipe explicitly disables it. Because the choice changes both retained activations and backward work, it is part of the measured workload definition.

Base-transformer recompute alternatives. Outside the DDP stack described in Table 28, the base transformer additionally exposes module-pattern, operator-save-list, and compiler-budget modes. The operator save list always retains flash-attention outputs (Dao et al., 2022), reduce-scatter results, and the `abs/max` reductions reused as low-precision amax statistics, and saves every second matrix multiplication. These alternatives are separate from the DDP policies measured in Section 13.

PP and TBO composition constraint. The pipeline schedule counts one model forward while two TBO lanes may each acquire a lease (Section 5.7). This report makes no measured claim about the slot-count factor under combined PP and TBO.

A.15 Some Kernel Prototypes Are Not Integrated

The table separates the live kernel paths from retained prototypes and identifies the conversion costs that remain in the live path.

Boundary	Current path	Prototype or remaining cost
Weighted FP8 combine backward	Integrated weighting plus row quantization avoids a BF16 [N, K, D] intermediate; qdata and scales then use separate PUTs	A direct weighted-quantize+NVSHMEM-PUT kernel exists only as an unwired benchmark prototype
Qdata/scale transport	Separate regular transfers in the integrated path	Paired and packed transfers are benchmark prototypes, not live training
Natural-layout MXFP8 grouped Wgrad	Operands dequantize and use BF16 <code>F.grouped_mm</code>	Native MXFP8 grouped Wgrad exists only as a prototype; this report makes no end-to-end claim about it.
Scale swizzling and RHS pre-quantization	FP8 reduces payload size but adds separate quantization and scale-layout time, which can dominate small profiles	An RHS cache amortizes only the weight-side conversion; activation-side quantization and layout recur every microbatch

A.16 Kernel Profiles Separate Transport and Compute Costs

Kernel profiles are interpreted through the following quantities:

Measurement	Why it matters
Kernel launch count per MoE block	Shows whether fusion reduces Python/autograd fragmentation.
Dispatch PUT time	Measures route-indexed one-sided send cost.
Gather GET time	Measures remote row pull cost during combine and dispatch backward.
Combine reduce time	Separates transport from local weighted reduction.
Grouped GEMM time and achieved utilization	Identifies whether expert compute or communication dominates.
Padding/capacity overhead	Captures wasted grouped GEMM work from routing imbalance.
FP8 quantization time	Shows whether reduced communication payload offsets quantization cost.
Scale swizzle/layout time	Detects hidden FP8 layout overhead.
BF16 Wgrad time in the MXFP8 path	Quantifies the cost of the current non-native MXFP8 Wgrad policy.
Peak allocated memory by phase	Connects kernel behavior to lease high-water and PP/recompute pressure.
Rowwise stream wait time under TBO	Measures whether ordering waits erase overlap.

B Reproducible Experiment Configurations and Metrics

This appendix records the hardware and workloads behind the report’s quantitative results and defines their accounting conventions. Experiment records vary in which configurations, environment details, raw logs, profiles, and plotting sources were retained; the individual descriptions state that coverage. Credentials and secret environment variables are excluded.

B.1 Audited Hardware and Software

Table 45 records the allocation inspected on 2026-07-10, which hosted the profiling and kernel experiments; the production-throughput runs of Section 14 used larger allocations of the same node type (Appendix B.10). These are hardware and link properties, not measured collective bandwidth.

Software-environment fields identify the activated interpreter, PyTorch, NCCL, NVSHMEM, Transformer Engine/torchao, compiler, and extension versions where recorded. A non-login shell can select a different

Item	Audited value
Compute	Four homogeneous nodes; eight NVIDIA B300 SXM6 AC GPUs per node; 32 GPUs total
GPU memory	275,040 MiB reported per GPU
Driver/toolkit	NVIDIA driver 590.48.01; driver CUDA compatibility 13.1; installed CUDA toolkit 13.0.88
Intra-node fabric	Every GPU pair reported as NV18; 18 links per GPU at 53.125 GB/s per link
Inter-node fabric	Eight active nominal 800-Gb/s XDR InfiniBand rails per node, one PXB-local rail aligned with each GPU; additional 100-Gb/s HDR ports present
Shared storage	Olmo-core checkout on WekaFS, visible identically from all four nodes
Olmo-core	The DDP training stack of this report at the revision audited on 2026-07-10, with a clean working tree

Table 45 Audited hardware pool. The inventory describes nominal hardware and link properties; application bandwidth, clocks, power mode, and GPU temperature vary with the run and are not inferred from it.

Python or omit the CUDA toolkit from `PATH`, so the machine inventory alone does not identify the software that executed a run. Network-interface and HCA selection likewise belongs to the realized launch environment rather than a machine-level default.

B.2 Audited Workload Roles

Table 46 describes a 30-block reference recipe and its reduced profiling counterpart, distinct from the headline run configurations in Section 14. The two exercise the same core BF16 rowwise path but are not interchangeable performance points.

Role	Model and batch	Topology/precision	Experiment purpose
Profiling	8 blocks, 32 routed experts, top-8, $d = 1536$, sequence 8192, 0.75-Mi-token global batch	EP-MP 8; 1–4 nodes; BF16 rowwise by default; no PP, CP, TP, TBO, or recompute	Host-visible route-shape profile; synchronized/rowwise/DeepEP topology comparison; initial multi-node scaling
30-block reference	30 blocks, 128 routed experts, top-8, $d = 1536$, sequence 8192, 18-Mi-token global batch	EP-MP 8; BF16 rowwise; no PP, CP, TP, TBO, or recompute in the base recipe	Full-reshard FSDP versus DDP-based training; production-scale throughput, efficiency, traffic, variance, and reliability

Table 46 Reference and profiling workload roles. The profiling workload is a reduced configuration for mechanism studies, not a throughput measurement for the 30-block reference.

B.3 The Main FSDP Comparison Uses Full Resharding

The main-text FSDP comparison uses the no-PP FSDP2 path with **full resharding**: each wrapped block all-gathers its full weights for forward, reshardes them, all-gathers them again for backward, and reduce-scatters its gradients. This is the minimum-persistent-parameter-memory endpoint compared with Olmo’s DDP path, which keeps each rank’s assigned weights in device memory. FSDP2 can retain unsharded weights through backward or across intermediate accumulation backwards, but the latter policy makes peak parameter memory approach that of the DDP path with sharded optimizer state; it is therefore a mechanism ablation rather than a primary competing design in this report (Zhao et al., 2023; PyTorch Contributors, 2026d).

Those retention policies lie between the two endpoints in parameter memory and communication; the main text analyzes only the full-reshard endpoint. FSDP and hybrid sharded data parallelism (HSDP) are also distinct configurations rather than interchangeable labels.

B.4 Reduced Profiling Changes the Workload

The 30-block reference recipe and its reduced profiling sibling exercise the same general BF16 rowwise path, but they are different sparse workloads. Based on configuration-derived counts, the reference recipe has

$\alpha_P = 10.89\%$, a $9.18\times$ capacity-to-active gap, and $N/K = 16$. Its 18-Mi-token optimizer step gives a balanced-routing mean of 1.125 Mi assignments per routed expert. The profiling workload has $\alpha_P = 49.40\%$, a $2.02\times$ gap, $N/K = 4$, and only 0.1875 Mi balanced assignments per routed expert. A profiling result therefore cannot be presented as throughput for the 30-block reference.

Quantity	30-block reference	Profiling workload
Blocks and width	30 blocks; first 2 dense, remaining 28 routed; $d = 1536$	8 blocks; first 2 dense, remaining 6 routed; same width and mixer family
Routed layer	$N = 128$, $K = 8$, routed hidden width 1536, one shared expert	$N = 32$, $K = 8$, with the same expert widths and shared branch
Routing and capacity	Softmax top- K , normalized route weights, capacity factor 1.25	Same
Sequence and global batch	8192 tokens; 18 Mi tokens per optimizer step	8192 tokens; 0.75 Mi tokens per optimizer step
Configuration-derived size	26.688B total, 2.906B active	2.014B total, 0.995B active
Parallel/precision path	EP-MP 8; BF16 rowwise; no PP, CP, TP, TBO, or recompute	Same core path, with profiling callbacks and deliberately reduced model and batch

Table 47 30-block reference and reduced profiling workload at the audited revision. Their different model and batch sizes prevent direct throughput comparison, even though they share the same core execution path.

The Introduction’s wall-time examples came from separate early comparisons in Megatron-LM and legacy Olmo-core. Their complete software and hardware environments have not been reconstructed. They therefore illustrate the observed slowdown that motivated this work, but do not provide a matched cross-framework benchmark.

For the profiling workload, the default rank microbatch is three sequences (24,576 tokens). The 0.75-Mi-token global batch yields four accumulation microbatches on one eight-GPU node and one on the 32-GPU pool. The profiling callbacks, reduced layers/experts, and smaller batch are profiling-specific; the BF16 rowwise routed-token path, EP-MP degree, lack of PP/CP/TP/TBO/recompute, and FP32 gradient and optimizer policy are shared with the 30-block reference.


B.5 Captured Submission-Regime Profiles

Section 8.1 describes two submission regimes: a host wait inside every routed block that holds the CPU and GPU in lock step, and a synchronization-free path in which the CPU runs ahead of the device. Figure 74 shows one captured Nsight Systems timeline for each regime, and Figure 75 magnifies their GPU kernel rows.


B.6 Verifying the Sync-Free Path

To check the sync-free property described in Section 8.5, we inspect the executed timeline. A qualifying steady-state trace contains no blocking D2H call and no submission-bound idle interval, which is what the captured pair in Figures 74 and 75 shows for the rowwise path. Step time alone cannot identify a submission problem. A useful profile reports CPU API and framework time, GPU kernel and communication time, the distance from CPU launch to GPU start, GPU idle intervals, blocking D2H calls, and end-to-end tokens/s, aligned at both the kernel level and larger NVTX ranges such as a transformer block or microbatch. PyTorch provides an experimental synchronization debug mode, but its coverage is incomplete for distributed and sparse operations; it is an audit aid rather than a substitute for a timeline (PyTorch Contributors, 2026l).

A standalone single-GPU grouped-linear microbenchmark from the MXFP8 study (Section 11) isolates the submission tax that this checklist is meant to expose. Graph replay appears in this report only as a measuring instrument; the production training path never captures or replays a graph (Section 15.6). Table 48 compares ordinary eager submission with CUDA Graph replay for a locally adapted OLMoE-family benchmark (Muennighoff et al., 2024). Its $1536 \rightarrow 3072$ up projection and 16 balanced local expert groups are settings of this single-B300 benchmark, not the published OLMoE configuration. “Prequantized” begins with MXFP8

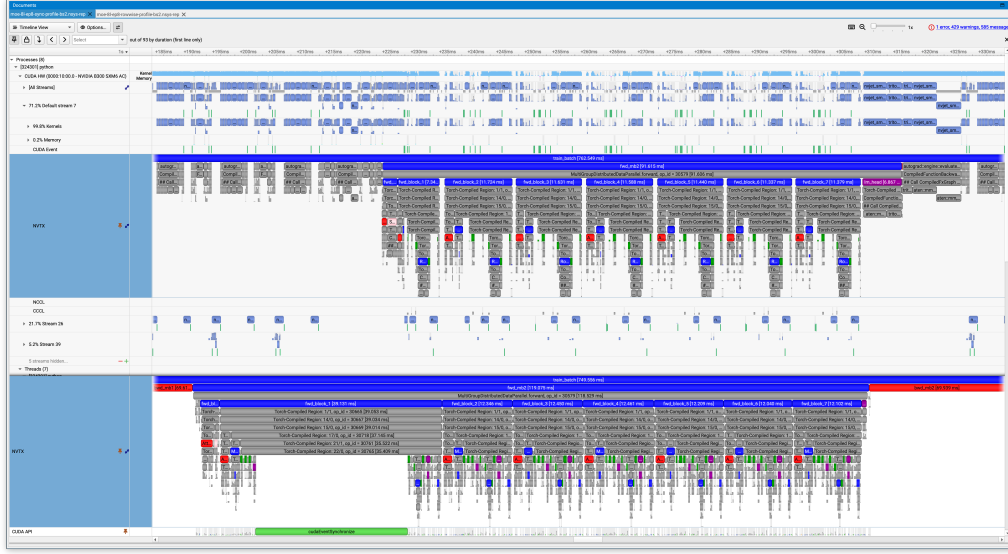

(a) Synchronized EP8 path.

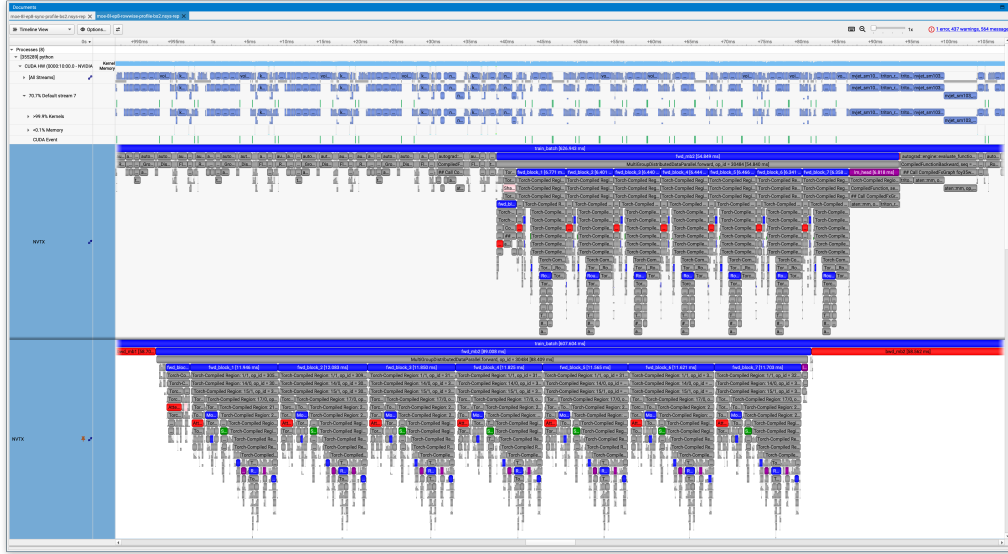

(b) Rowwise EP8 path.

Figure 74 Captured timelines show the two submission regimes. Both Nsight Systems profiles run the same eight-layer development model (128 routed experts, top-8, one shared expert, EP8, BF16, two sequences per rank microbatch) on eight B300 GPUs; only the expert-parallel path differs. This capture predates and differs from the reduced profiling workload of Table 46. In the synchronized trace (a), the per-block host wait appears as `cudaEventSynchronize` in the CUDA API lane, the CPU and GPU ranges of each forward block stay in lock step, and the GPU kernel rows show recurring gaps. In the rowwise trace (b), no host wait interrupts submission: the CPU finishes submitting the microbatch while the GPU is still executing earlier work, and the GPU-side forward blocks run back to back. Each panel is one captured instance of one rank; the two traces are separate runs, so this figure illustrates the submission mechanism rather than a controlled throughput comparison.

input; “including Q” also charges the activation-quantization (Q) step. Every number is a speedup over the matching BF16 grouped GEMM.

At $M = 128$, the captured device sequence is more than $2\times$ faster than the BF16 baseline while ordinary eager execution is slower. At $M = 32,768$, the eager and graph results converge. The convergence indicates that host submission affects short-operator timings. The eager-graph gap is still not a clean measure of

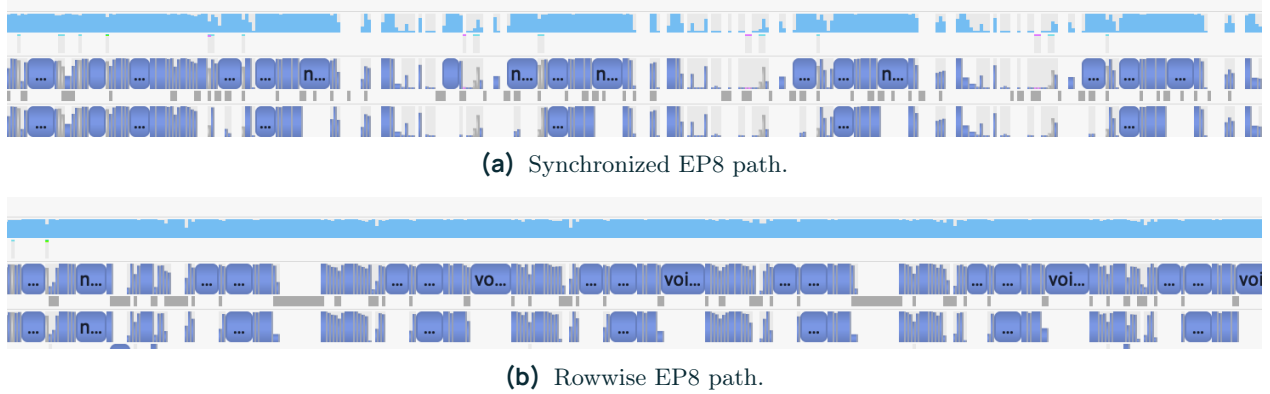


Figure 75 Magnified GPU kernel rows of the two captures. Each strip crops the CUDA HW utilization band and its two All-Streams kernel rows from the corresponding panel of Figure 74, over an equal-width sub-window of each timeline. In the synchronized capture (a), the utilization band is repeatedly interrupted and the kernel rows show recurring idle gaps where the device waits for host submission. In the rowwise capture (b), the band is continuous and the kernel rows are densely packed. The two strips come from separate runs whose timeline zoom levels differ, so bar widths are not comparable across panels; the crops illustrate the submission mechanism, not a throughput measurement.

Rows M	Prequantized input		Including Q	
	Eager	Graph	Eager	Graph
128	$0.66\times$	$2.17\times$	$0.34\times$	$2.03\times$
4,096	$0.65\times$	$1.26\times$	$0.32\times$	$1.06\times$
32,768	$1.43\times$	$1.42\times$	$1.21\times$	$1.22\times$

Table 48 Eager submission can hide the device-level benefit of short MXFP8 expert operations. Each value is the speed of the MXFP8 operation relative to a matching BF16 grouped GEMM at the same M and submission mode: $1\times$ means equal time, and larger is faster than BF16. Results are from one GPU and one random seed. Eager values use 25-ms warm-up and 100-ms timed windows; graph values replay 32 captured copies with three warm-up and five timed replays. CUDA Graph replay is a warm-cache device-service-time ceiling, not training wall time.

CPU launch time: replay changes the cache regime and excludes graph-launch latency, and the benchmark omits routing, communication, autograd, and the rest of the training step. The relevant end-to-end metric therefore remains eager training wall time.

Removing the split-list round trip is also only one side of the trade-off: direct row movement adds its own route construction, capacity storage, and completion costs. Several experiments examine different parts of that trade-off. The profiled example of Section 5.4 localizes the shorter dispatch-and-combine path, the captured timelines above show the two submission regimes, the microbenchmark isolates the submission tax on short expert operations, and the feasibility point of Table 6 shows one complete operating point without attributing its throughput to a single mechanism.

B.7 Checkpoint-Branched LBL-Coefficient Runs

Figures 45 and 46 derive from archived metric histories of two trajectories of the production pretraining project. The experiment package bundled with this report holds the run manifests with full effective configurations, the merged metric histories and their merge report, and the plotting script.

- **Model.** 48 transformer blocks at $d_{\text{model}} = 2048$; block 0 is dense, and each of the 47 MoE blocks uses 64 experts, top-4 selection, sigmoid gating, dropless dispatch, and expert hidden size 2048; grouped-query attention (Ainslie et al., 2023) with 16 query and 4 key/value heads; `dolma2` tokenizer (Allen Institute for AI, 2024).

- **Data and batch.** OLMo-mix-0625 at sequence length 8,192; global batch 4,194,304 tokens per step.
- **Objective.** Instance-granularity LBL without per-layer rescaling; LM-head z-loss 10^{-5} ; router z-loss disabled. The branched quantity is the LBL coefficient: 0.05 on the original trajectory and 0.005 on the branch.
- **Optimizer.** Skip-step AdamW (Loshchilov and Hutter, 2019) at learning rate 3×10^{-5} with betas (0.9, 0.95), weight decay 0.1 (zero on embeddings), a warmup-stable-decay schedule (Hu et al., 2024; Hägele et al., 2024) with a 2,000-step warmup, and gradient clipping at norm 1.
- **Execution.** HSDP data parallelism with BF16 parameters; FP8 is disabled. These trajectories run the production pretraining stack rather than the expert-parallel paths of this report; the two branches differ only in the LBL coefficient, and no systems claim rests on them.
- **Branch protocol.** The branch reloads the original run’s model and optimizer checkpoint at step 17,000 (71.3 billion tokens) and changes only the coefficient. The archive covers steps 1–25,669 of the original run and 17,001–81,084 of the branch. The Section 10 windows compare medians over steps 17,001–17,999 and 24,000–25,669, before the branch’s batch-size transition at step 40,000.

B.8 Batch-Size Warmup Run

This subsection records the training run behind Figure 66 in Section 16.

- **Model.** 24 transformer blocks; 48 routed experts with top-4 selection and one shared expert; 3.21B active and 23.10B total parameters.
- **Batch schedule.** The global batch increases through 1, 2, 3, 6, 9, 15, and 24 Mi tokens over approximately 2.07 trillion training tokens; the later transitions fall near 409B, 777B, and 1.375T cumulative tokens.
- **Learning rate.** Square-root batch scaling (Equation 63 with $\alpha = \frac{1}{2}$) applied at each batch increase.
- **Provenance.** The figure stitches 26 run segments of one training campaign from its archived metric histories; at every overlapping step the newest segment’s value is retained. The artifact bundled with this report contains the raw exported metric histories, a per-segment run manifest, the stitched and plotted series, and the scripts that regenerate the figure from the archive alone.
- **Scope.** The bundle preserves metric histories and figure provenance. The resolved optimizer configuration lives in the serialized run configurations of the underlying segments and is not re-audited here.

B.9 Experiment Artifact Contents

The following fields describe the configuration and evidence relevant to replicating a run. They define how this report describes its experiment records, not a claim that every archived artifact contains every field. Availability is stated with each experiment.

- **Provenance.** Repository and dependency revisions, patch/diff, command, run name, and configuration after all overrides;
- **Model and workload.** Total and active parameters, layers, mixers, experts, top- K , shared experts, capacity/drop policy, sequence, local/global useful batch, and random seeds;
- **Topology.** Nodes/GPUs and DP, CP, EP-DP, EP-MP, PP, VPP, microbatch, accumulation, and schedule;
- **Precision and layout.** Parameter, activation, accumulation, reduction, optimizer, communication, cache, and checkpoint dtypes and layouts;
- **Environment.** GPU clocks/power mode, driver/toolkit, activated software versions, NCCL/NVSHMEM interfaces and HCAs, compiler/cache controls, and relevant non-secret environment;
- **Measurement protocol.** Data-prewarm, compile, symmetric-pool prewarm, warmup, measured steps, repetitions, synchronization points, exclusions, and failure/retry policy;
- **Raw outputs.** Raw logs, rank-level metric tables, profiler captures, allocator traces, checkpoint metadata, and plotting scripts.

The effective serialized configuration, rather than the command string alone, determines the realized topology and workload after command-line overrides.

B.10 Production-Throughput Run Details

This subsection is the run-level companion to Table 30. All rows use sequence length 8192, top-4 routing, and one shared expert. The main table selects one random-routing systems reference per operating point; the tables below preserve the learned-routing companions and the alternate batches and topologies. A tracking-system status of “crashed” for these short systems runs can reflect manual termination after the desired observations and is not, by itself, evidence that training failed.

Configuration	Model	Batch and scale	Parallel topology	Numeric/runtime path
Tiny-64E, no EP	16 layers; 64 routed experts; 1.59B active, 12.91B total	GBS 8 Mi; rank microbatch 65,536; 2 nodes, 16 B300s	16 / 16 / 1 / 1	BF16; no recompute; local expert execution
Tiny-64E, EP8	Same model as Tiny-64E, no EP	GBS 8 Mi; rank microbatch 65,536; 2 nodes, 16 B300s	16 / 2 / 8 / 1	BF16; rowwise NVSHMEM; no recompute
Small-64E, 24 Mi	32 layers; 64 routed experts; 4.29B active, 40.86B total	GBS 24 Mi; rank microbatch 24,576; 16 nodes, 128 B300s	128 / 16 / 8 / 1	BF16; rowwise NVSHMEM; no recompute
Small-64E, 16 Mi	Same Small-64E model	GBS 16 Mi; rank microbatch 16,384; 16 nodes, 128 B300s	128 / 16 / 8 / 1	BF16; rowwise NVSHMEM; no recompute
Medium-64E	39 layers; 64 routed experts; 7.37B active, 70.22B total	GBS 16 Mi; rank microbatch 16,384; 16 nodes, 128 B300s	64 / 8 / 8 / 2	BF16; rowwise NVSHMEM; no recompute
Medium-96E	39 layers; 96 routed experts; 7.38B active, 103.75B total	GBS 24 Mi; rank microbatch 16,384; 16 nodes, 128 B300s	64 / 8 / 8 / 2	BF16; rowwise NVSHMEM; no recompute
Medium-128E	39 layers; 128 routed experts; 7.38B active, 137.27B total	GBS 24 Mi; rank microbatch 16,384; 16 nodes, 128 B300s	32 / 4 / 8 / 4	BF16; rowwise NVSHMEM; no recompute
Large-128E, PP4	47 layers; 128 routed experts; 15.14B active, 295.99B total	GBS 32 Mi; rank microbatch 8192; 64 nodes, 512 B300s	128 / 16 / 8 / 4	BF16; rowwise NVSHMEM; no recompute
Large-128E, PP8	Same Large-128E model	GBS 24 Mi; rank microbatch 8192; 64 nodes, 512 B300s	64 / 8 / 8 / 8	BF16; rowwise NVSHMEM; no recompute
Ultra-128E	63 layers; 128 routed experts; 58.36B active, 1.200T total	GBS 64 Mi; rank microbatch 8192; 64 nodes, 512 B300s	64 / 8 / 8 / 8	MXFP8 attention and MLP compute; rowwise NVSHMEM; per-layer recompute
Ultra-256E	63 layers; 256 routed experts; 58.41B active, 2.380T total	GBS 64 Mi; rank microbatch 16,384; 64 nodes, 512 B300s	64 / 2 / 32 / 8	MXFP8 attention and MLP compute; DeepEP v2; per-layer recompute

Table 49 Resolved configuration matrix for the production-throughput runs. GBS and rank microbatch are useful tokens; Mi denotes 2^{20} . The topology column reports dense-DP / expert-DP / EP / PP degrees. The serialized run configuration, not a subsequently edited local recipe, is authoritative.

Configuration	Routing	TFLOP/s /GPU	Observation and use
Tiny-64E, no EP	Learned	895	Began near 870 and stabilized after roughly 100 steps; learned-routing companion
Tiny-64E, no EP	Random	903	Headline; random-routing curve was nearly stable from the first step
Tiny-64E, EP8	Learned	820	Began near 799, then stabilized; retained as the learned EP8 companion
Small-64E, 24 Mi	Learned	768	Learned-routing companion
Small-64E, 24 Mi	Random	841	Headline
Small-64E, 16 Mi	Random	821	Alternate smaller GBS and rank microbatch; not a repeat of the 24-Mi run
Medium-64E	Random	853	Headline
Medium-96E	Random	855	Headline
Medium-128E	Random	843	Headline
Large-128E, PP4	Random	768	Headline
Large-128E, PP8	Random	757	Alternate PP8 and 24-Mi GBS; not a repeat of the headline run
Ultra-128E	Random	858	Headline
Ultra-256E	Random	689	Headline short-run observation; nine steps and no stabilized plateau

Table 50 Run observations and headline-selection record. Throughput values are representative observations from the runs’ throughput curves, not arithmetic means across repeated launches. “Headline” identifies the random-routing value carried into Table 30.

Slower launches of the Medium-96E and Medium-128E configurations are omitted from the headline selection. Environmental problems were suspected, but the specific cause was not established. The headline table reports the highest rate observed for each configuration, which is neither a repetition mean nor an estimate of the hardware limit.

B.11 Metrics Track Useful Work, Time, and Memory

Table 51 defines the quantities used to compare useful work, time, and memory. Each experiment specifies which metrics and supplemental diagnostics were retained; a definition here does not imply that the quantity was measured in every run.

For an optimizer step with F_{step} useful model FLOPs, elapsed time T_{step} in seconds, and G GPUs, the report uses

$$\text{MFU}_{\text{BF16-ref}} = \frac{F_{\text{step}}}{G T_{\text{step}} C_{\text{BF16}}}, \quad C_{\text{BF16}} = 2.25 \times 10^{15} \text{ FLOP/s per B300 GPU.} \quad (95)$$

This is the dense BF16 Tensor Core peak, not NVIDIA’s doubled 2:4-sparse peak (NVIDIA, 2026r); selecting a subset of experts does not make their weight matrices 2:4 sparse. The numerator counts active-model work, excluding activation recomputation, while elapsed time includes the complete step. We retain this BF16 reference for MXFP8 runs so the normalization is consistent; those values are not utilization of the FP8 peak.

Metric	Definition
Steady-state step time	Wall time from the start of an optimizer step’s first forward to completion of optimizer update and required cache refresh, after declared startup/warmup. Depending on the retained samples, summaries may include median, mean, standard deviation, and tails
Useful tokens/s/GPU	Global non-padding tokens contributing to the normalized loss per measured step, divided by synchronized step time and GPU count; capacity-dropped routes are a separate quantity rather than silently removed
Useful-model MFU	Useful active-model FLOPs divided by elapsed time, GPU count, and the stated per-GPU compute peak. Sections 2 and 14 use the B300 dense BF16 peak of 2250 TFLOP/s/GPU for every row, including MXFP8, and label this common BF16-reference normalization explicitly. It is not utilization of the FP8 peak. Recompute and inactive experts add no useful FLOPs to the numerator
D2H route-shape wall time	Count and duration of host waits/copies causally between router metadata production and dependent dispatch/compute launches, plus the corresponding CPU launch gap and GPU idle interval from the same timeline
Communication exposure	Dispatch/combine or weight/gradient communication time not hidden by useful compute, with bytes, primitive, process group, and forward/backward scope identified
Route/drop statistics	Offered and accepted assignments, total and per-source drop rate, per-expert load distribution, capacity utilization, and rank skew
Peak device memory	Maximum allocated and reserved bytes per rank after a declared reset point. Supplemental diagnostics, where recorded, give max/median ranks and whether compiler/graph memory pools, symmetric pools, derived caches, and checkpoint staging were allocated at reset and remained allocated through the measured window
Lease high-water	Maximum concurrently checked-out saved-payload slots by block/payload/pipeline part. A schedule-derived prediction and transient shared scratch usage are separate diagnostics where available
Checkpoint peak/time	Pre-save and peak allocated/reserved bytes, and elapsed save or load time. Supplemental diagnostics include bytes written/read, retries, and caches allocated at the measurement boundary, where recorded
Scaling efficiency	Measured useful throughput relative to the declared one-node or smallest valid topology reference under a stated strong/weak-scaling batch rule; rank variance is a supplemental diagnostic where recorded

Table 51 Metric definitions for quantitative comparisons in this report. Profiler queries and calculation scripts are part of the corresponding experiment artifact when available.

C Glossary of Parallelism, Routing, and Training Storage

The same object can have a model meaning, a runtime placement, and a checkpoint representation. This glossary fixes the terms used for those layers.

C.1 Parallel Dimensions and Mesh Axes

Term	Meaning
P / PP	Pipeline degree. PP partitions layers and changes execution order, not which data-parallel ranks replicate each parameter.
D / DP	Dense data-parallel degree. With CP, ordinary dense gradients reduce over the folded $DP \times CP$ replica pool; dense optimizer state is sharded or replicated over DP and duplicated across CP.
C / CP	Context-parallel degree. CP shards sequence before the PP schedule and participates in the folded expert pool.
D_E / EP-DP	Expert replica degree. Ranks on this axis hold the same local EP-MP expert shard and reduce its ordinary gradients together.
M_E / EP-MP	Expert-sharding degree. Ranks on this axis hold different routed-expert shards; it is not a gradient all-reduce group.
EP	Expert parallelism, used generically for distributing routed experts and moving token rows to ranks that store the selected experts.

Continued on next page

Term	Meaning
TP	Tensor parallelism, which partitions individual parameter tensors and their operations.
dense mesh	Device-mesh view (pp?, dp, cp?).
MoE mesh	View of the same ranks as (pp?, ep_dp, ep_mp). Within a PP stage, $DC = D_E M_E$.

C.2 Model Capacity and Routing Quantities

Symbol or term	Meaning
d / <code>d_model</code>	Transformer hidden width.
h_e	Routed expert intermediate width.
N / <code>num_experts</code>	Total routed-expert count in an MoE layer.
K / <code>top_k</code>	Number of routed experts selected per token.
S	Sequence length before context-parallel sharding.
T	Number of input tokens before top- K expansion and capacity handling.
B / m	Useful tokens processed per rank in one optimizer step / number of microbatches in that step, when used in the cost ledger before model parallelism.
<code>num_local_experts</code>	Routed experts stored on one EP-MP rank, normally N/M_E .
active parameters P_{active}	Parameters used by one token; routed expert work scales with K , not N .
total parameters P_{total}	Full persistent parameter pool; optimizer tensors and checkpoint size scale with this quantity.
P_{local}	Parameter capacity held by one rank after PP and EP placement. This is neither the model-wide total parameter count nor the per-token active parameter count.
P_E / P_{dense}	Routed-expert and dense (non-expert) parameter counts of the whole model; one rank holds about P_E/M_E of the expert part.
expert activation ratio α_E	Fraction of routed experts selected for one token, K/N .
parameter activation ratio α_P	Fraction of total model parameters active for one token, $P_{\text{active}}/P_{\text{total}}$. It generally differs from α_E because part of the model is always active.
Γ_{capacity}	Model-wide capacity-to-active gap, $P_{\text{total}}/P_{\text{active}} = 1/\alpha_P$. It is not itself an overhead or a conversion from bytes or launches to elapsed time.
routed experts	Sparse branch selected by the router and partitioned over EP-MP.
shared expert	Always-active branch that remains in the dense parameter family.
router	Projection and policy producing selected expert indices, route weights, and load-balancing metadata.
expert offsets/counts	GPU or host metadata delimiting unequal per-expert row ranges for grouped computation.

C.3 Runtime Buffers and Reuse Terms

Term	Meaning
persistent training state	Compute weights, accumulated gradients, FP32 main weights, and optimizer states that must remain available across microbatches or update boundaries.
execution working memory	Activations, routing and communication buffers, and workspaces used by execution. A preallocated fixed-address buffer can still belong to this class.
static placement / shape	A stable placement, buffer identity or address, capacity, shape, or graph structure. Static values need not be immutable.
symmetric memory	Collectively established storage that ranks in one team can address through one-sided operations.
Olmo symmetric memory	Current rowwise backend built around Olmo’s CUDA/NVSHMEM wrapper rather than the legacy Torch symmetric-memory path.

Continued on next page

Term	Meaning
dispatch / combine	Movement from token order to expert-buffer order / return and router-weighted accumulation into token order.
lease	Reservation of a symmetric payload that must remain valid for a later backward. Autograd releases it after the consumer finishes.
shared transient slot	Bounded scratch reused across blocks or lanes; its existence does not indicate when a saved payload may be overwritten.
fixed per-block cache	Stable cached storage used when sharing is disabled or unsafe; a cache hit alone does not show that backward has finished with the previous contents.
high-water	Maximum simultaneous live payload count predicted or observed for a stage and storage family.
qdata-scale payload	One MXFP8 value represented by quantized data and its block scales. Both components must remain valid and be released together.
BF16 anchor	Temporary initialization value and cache seed for an <code>FP8WeightStore</code> -backed parameter. It may be released after optimizer setup and is not an independent checkpoint source.
MXFP8 compute-weight cache	Derived orientation-specific qdata/scale compute weight, refreshed from the FP32 main weight.
MXFP8 runtime payload	Derived qdata/scale representation for activation or communication data.

C.4 Optimizer and Checkpoint Terms

Term	Meaning
<code>MultiGroupDistributedDataParallel</code>	Olmo reducer assigning a process group per parameter family and keeping persistent bucket views.
dense bucket	Gradient bucket reduced over the folded $DP \times CP$ replica group.
expert bucket	Routed-expert bucket reduced over EP-DP, the group holding replicas of the same expert shard.
<code>OLMoDDPOptimizer</code>	Olmo optimizer that manages FP32 main weights, optimizer states, gradient intake, global gradient norm, copy-back, and checkpoint views.
compute weight	Weight representation consumed by forward or backward computation: a BF16 tensor for an ordinary parameter or a derived, orientation-specific MXFP8 qdata/scale cache for a selected linear.
FP32 main weight	FP32 parameter value updated by the optimizer and used to refresh its compute weights.
<code>main_grad</code>	Optimizer-facing high-precision gradient slice.
copy-back	Reconstruction of compute weights after a successful update or load.
<code>FP8WeightStore</code>	Trainable FP8-weight interface with high-precision gradients and derived orientation-specific MXFP8 compute-weight caches; not an <code>FP8nn.Parameter</code> .
checkpoint-view DTensor	Global tensor view exposed to distributed checkpointing, normally without a full GPU expert tensor.
topology portability	Ability to restore complete model and optimizer tensors under a changed DP, EP, or PP parameter-placement map.

D System Method Trade-Off Matrix

The methods in this report solve different parts of the MoE systems problem. Figure 76 collects their direct first-order effects in one place. The matrix separates a general parallelism mechanism from its implementation or schedule. General Expert Parallelism (Gen. EP), for example, describes expert sharding and its unavoidable token movement; one-dimensional all-to-all (1D-A2A) and rowwise all-to-all (Row-A2A) describe two implementations of that movement. Similarly, general Pipeline Parallelism (Gen. PP) describes layer sharding, while Interleaved-1F1B (I-1F1B) and 1F1B-V describe two schedules.

	DDP	FSDP	Dist Opt	Gen. EP	1D-A2A	Row-A2A	Gen. PP	1-1F1B	1F1B-V	Cp	Recomp	Grp GEMM	MXFP8	Sync-Free	CUDA Graph	Overlap	HW Map	Topo-Agst Ckpt	CPU Offload	MegaMoE
Persistent training-state memory	-	-	+	+			+						-							
Weight materialization and refresh	+	+	+	+			+				+		+		+			+		
Saved activation memory	-	-	+				+						+		+					
Activation-retention imbalance							-		+		+		+		-					
Temporary/runtime buffers		-		-			-			-	+	+	-						-	-
Optimizer update work	-	+	+	+			+										+			
Gradient/weight synchronization	+	+	+	+			+										+			
Expert dispatch/combine traffic		-	-	-							+		+				+			+
Pipeline-boundary traffic				-			-		+	+			+		+	+	+			
Host-device traffic										+			+				+		-	
Inter-node traffic	-	-	-	-			-			-			+				+			
Routing/layout permutations				-					+		+									+
Padding and wasted expert FLOPs				+							+	+	+						+	+
Small/irregular expert GEMMs				+								+	+						+	+
Model compute throughput				+						+	-	+	+						+	+
Additional recompute FLOPs																				
Quantization/swizzle overhead																				
Dynamic route/GEMM shapes				-			+					+	+							
Device-host synchronization				+			-					+	+							
CPU launch overhead		-		-			-			-	-	+	-						-	+
Pipeline bubbles										+										
Expert/stage load imbalance				-			-			+			+		+	+	+			
Exposed communication	-	-	-	-			-		+	-			+		+	+	+		-	+
Communication-compute contention				+			+		+	+										
Checkpoint peak memory		+		+			+		+	+										
Topology-dependent restart		+		+			+		+	+										
Save/load conversion time										+			+							
Integration complexity	+	+	-	-			-		-	-	+	-	-		-		+	-	+	-

Figure 76 First-order effects of the methods in this report. General EP and PP columns show the effect of the sharding mechanism; the adjacent transport and schedule columns show implementation-specific effects. Signs describe the usual first-order direction for the designs in this report. Exact outcomes depend on model, batch, topology, hardware, and implementation; the qualitative signs do not predict end-to-end speedup.

The remaining headers abbreviate Distributed Data Parallel (DDP), Fully Sharded Data Parallel (FSDP), distributed optimizer (Dist Opt), Context Parallelism (CP), activation recomputation (Recomp), grouped general matrix multiplication (Grp GEMM), microscaling FP8 (MXFP8), synchronization-free execution (Sync-Free), CUDA Graph execution (CUDA Graph), communication-compute overlap (Overlap), hardware-aware topology mapping (HW Map), topology-agnostic checkpointing (Topo-Agst Ckpt), CPU activation offload (CPU Offload), and the fused MegaMoE prototype (MegaMoE).

A green plus means that the method directly reduces the named bottleneck. A red minus means that it introduces or increases that cost. An amber triangle marks an effect that depends materially on model shape, topology, schedule, hardware, or implementation. An empty cell means that the method has no direct first-order effect; it does not mean that the two are independent in a complete training run. The matrix is a qualitative design guide, not a performance ranking, and combinations of methods can change the individual effects.

E Expert-Merge Normalization in Public MoE Models

Section 21 motivates Olmo’s routed/shared merge from its dense-MLP decomposition and initialization scale. This appendix places that choice beside public model and framework implementations (Table 52). The comparison is based on the cited reports, released configurations, and source code.

For consistency with Equation 80, let p_i denote selected routed scores when they are renormalized to sum to one, let α be any additional routed scale, so that the routed coefficients are $r_i = \alpha p_i$, and let $s(x)$ be the shared-expert coefficient. A rule that instead retains the top- K probabilities $q_i(x)$ of a softmax over all N experts has token-dependent routed mass $m_K(x) = \sum_{i \in \mathcal{S}(x)} q_i(x) < 1$. These are separate design choices: normalizing the selected routed scores does not determine either α or $s(x)$.

Megatron-Core illustrates the distinction between a framework default and a model recipe particularly clearly. Its current examples use routed scales of 2.5 for DeepSeek-V3, 2.827 for Kimi K2, and either 2.5 or 5.0 for the surveyed Nemotron 3 variants, rather than deriving one scale from K or expert width. The examples establish that the mechanism supports model-specific choices; they are not a controlled ablation showing that one value is preferable (NVIDIA, 2026d).

The released DeepSeek-V3 reference requires a similar qualification. Its inference code applies the routed scale 2.5, while the DeepSeek-V3 report’s routing equations describe normalized selected sigmoid affinities and an additive shared branch. The original large-scale training implementation is not public, so the released inference setting does not establish the exact pretraining merge formula.

Across these systems, routed mass may be below one, equal to one, multiplied by a model-specific constant, or equal to K ; the shared contribution may be absent, have unit gain, or use a learned gate. Expert widths and initialization histories also differ, and Qwen’s upcycling changes the relevant starting point. The initialization-scale rationale in Section 21 applies to Olmo’s architecture. These public implementations do not establish a universal or uniquely optimal merge normalization.

F Context Parallelism and MoE Parallel Folding

Long sequences create an activation-memory and attention-computation problem that Expert Parallelism (EP) does not address. **Context Parallelism (CP)** divides the sequence dimension among ranks that process the same training examples. With a CP degree C , each rank enters a Transformer block with approximately S/C of the sequence positions. CP therefore reduces the local size of sequence-shaped activations, but it does not itself partition parameters or create additional data-parallel examples. Routed-expert parameter placement remains the job of EP.

Olmo-core uses the **Ulysses** form of CP for the MoE path (Jacobs et al., 2023). Before attention, each rank holds queries, keys, and values in a context-sharded layout. An all-to-all operation changes that layout as follows for batch size B , sequence length S , head count H , and head width d_h :

Model or implementation	Routed coefficients	Shared branch	Interpretation
Olmo, this report	Selected normalization followed by $\alpha = K$; hence $\sum_i r_i = K$.	Unit gain, $s = 1$.	Unit-average selected coefficients; matches the additive dense-block reference under uniform selected routing.
Megatron-Core default, when shared experts are enabled	Post-top- K softmax with $\alpha = 1$ by default; α is configurable.	Unit gain by default; an optional learned sigmoid gate is available.	A configurable framework rather than one prescribed model recipe (Yan et al., 2026; NVIDIA, 2026d).
DeepSeek-V3 released reference	Selected sigmoid affinities are renormalized and multiplied by $\alpha = 2.5$.	Unit gain.	A model-specific routed scale between one and $K = 8$ (DeepSeek-AI et al., 2024; DeepSeek-AI, 2025a).
Qwen1.5-MoE and Qwen2-MoE released models	Full softmax over all experts followed by top- K without selected renormalization; routed mass is $m_K(x) < 1$.	Learned sigmoid gate.	An upcycled recipe in which routed mass and shared gain are both token dependent (Qwen Team, 2024a; Yang et al., 2024; Qwen Team, 2024b,c; Qwen Team et al., 2024).
Qwen3.5 MoE public implementation	Selected top- K probabilities are renormalized to sum to one.	Learned sigmoid gate.	Unit routed mass with a token-dependent shared contribution (Qwen Team, 2026b; Hugging Face, 2026).
Mixtral	Softmax over the selected logits; routed mass is one.	No shared expert.	A routed-only weighted-average convention (Jiang et al., 2024a; Mistral AI, 2026).
OLMoE-1B-7B	Full softmax over 64 experts followed by top-8 without selected renormalization; routed mass is below one.	No shared expert.	The merge rule in this report is not inherited from the earlier OLMoE model (Muennighoff et al., 2024).
MegaBlocks options	Selected route weights may remain unnormalized or receive an L_p normalization.	Direct addition by default; an option uses routed coefficient $K/(K+1)$ and shared coefficient $1/(K+1)$.	Exposes normalization as a configurable recipe choice rather than a fixed framework identity (Databricks, 2026).

Table 52 Public MoE implementations use different routed and shared-expert merge rules. The table records framework defaults and released inference implementations; these sources do not establish which merge rule was used in every original pretraining run.

$$[B, S/C, H, d_h] \longrightarrow [B, S, H/C, d_h], \quad (96)$$

so each rank evaluates the full sequence for a subset of attention heads, which requires C to divide H . A second all-to-all returns the output to the context-sharded layout. The remaining operations in the Transformer block continue on local token rows. In particular, the MoE router receives the local S/C rows directly; the model does not gather the full sequence before routing.

CP ranks are not independent data-parallel replicas because they contribute different sequence slices of the same examples. This distinction matters when CP is combined with EP. Let D and C be the dense Data Parallelism (DP) and CP degrees within one pipeline stage, and let D_E and M_E be the expert-replica and expert-sharding degrees. Olmo-core forms two views of the same per-stage rank set:

$$\mathcal{G}_{\text{stage}} = \mathcal{A}_{\text{DP}} \times \mathcal{A}_{\text{CP}} = \mathcal{A}_{\text{EP-DP}} \times \mathcal{A}_{\text{EP-MP}}, \quad DC = D_E M_E. \quad (97)$$

The dense view keeps CP visible to attention and input preparation. Dense gradients reduce over the combined DP $\times$ CP group. The MoE view instead uses EP-MP to partition routed experts and EP-DP to synchronize copies of the same expert shard. Dispatch and combine operate over the folded expert groups, so routed tokens from all DP and CP coordinates can reach the ranks that store their selected experts.

This construction is a focused application of **MoE parallel folding**, which allows dense attention and sparse expert layers to use different parallel mappings on the same devices (Liu et al., 2025a). For example, four ranks can form a dense mesh with $D = 2$ and $C = 2$, then be viewed by the MoE layers as $D_E = 1$ and $M_E = 4$. Enabling $CP = 2$ and $EP\text{-}MP = 4$ therefore still uses four ranks within the stage, rather than allocating an independent four-rank expert group for each CP coordinate. More generally, parallel folding prevents CP and EP from being treated as orthogonal multipliers when their layer-local work can share the same ranks.

Pipeline Parallelism (PP) adds an outer partition over layers. Within each PP stage, inputs and labels are sequence-sharded before the pipeline schedule starts, while the original sequence length is retained for positional encoding. Later stages receive already-sharded activations and do not apply CP a second time. Equation 97 then holds independently inside every pipeline stage. Within this layout, CP assigns sequence rows, EP assigns routed experts, and PP assigns layers to ranks.

CP lowers the per-rank footprint of many sequence-shaped activations and makes longer contexts feasible, while Ulysses adds attention-layout all-to-alls. Parallel folding does not remove that communication; it prevents CP from unnecessarily multiplying the device count required by EP and gives attention and routed experts the process groups that match their respective computation.

G Author Contributions

Tianhua Tao led the project and carried out its core research and development: conceptualization, system design and implementation, experimental evaluation, profiling, analysis, visualization, and manuscript preparation.

Akshita Bhagia contributed broadly to the Olmo-core software, including but not limited to MoE code refactoring and integration, software maintenance, and testing.

Dirk Groeneveld, Pete Walsh, and Tyler Romero made foundational contributions to Olmo-core and early MoE prototyping, establishing the software foundation on which the Olmo-core DDP system described in this report builds.

Yashas Samaga and Jacob Morrison participated in technical discussions on MoE integration and downstream use. Their experience with the software informed feedback on design, training workflows, and usability.

Iz Beltagy provided team leadership, project direction, and strategic coordination.

Taira Anderson provided technical program management, including compute-resource allocation, scheduling, project administration, and coordination.

Noah A. Smith and Hannaneh Hajishirzi provided strategic guidance and research advising. Hannaneh Hajishirzi also served as the project’s primary academic advisor.

G.1 Use of AI Tools

We used AI tools to assist with developing the codebase and GPU kernels, drafting and revising this report, managing experiments, and creating visualizations. Building and documenting the training stack required repeated iteration across distributed systems code, kernel behavior, experiment orchestration, and technical explanation. We used AI assistance to support that iteration, explore implementation alternatives, and reduce repetitive coding and editorial work. This was a practical part of a human-led research process: the research direction, design decisions, and interpretation of results remained the responsibility of the authors.

AI-generated suggestions were assessed through code inspection, testing, profiling, experimental comparisons, and source checks, as appropriate to the task. We also kept a citation audit that records source evidence and review notes for individual cited claims. These checks can themselves miss errors; AI assistance does not transfer responsibility for the work. The authors remain responsible for the methods, results, and statements in this report.

References

- Samira Abnar, Harshay Shah, Dan Busbridge, Alaaeldin El-Nouby, Joshua M. Susskind, and Vimal Thilak. Parameters vs FLOPs: Scaling laws for optimal sparsity for mixture-of-experts language models. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 204–230. PMLR, 2025. <https://proceedings.mlr.press/v267/abnar25a.html>.
- Ai2. open-instruct: Ai2’s post-training codebase. GitHub repository, 2026. <https://github.com/allenai/open-instruct/tree/b9269782a3d2c81f2e43ce14ba5290417923f4c0>. Commit b9269782a3d2c81f2e43ce14ba5290417923f4c0; accessed 2026-09-19.
- Joshua Ainslie, James Lee-Thorp, Michiel de Jong, Yury Zemlyanskiy, Federico Lebrón, and Sumit Sanghai. GQA: Training generalized multi-query transformer models from multi-head checkpoints. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 4895–4901, 2023. <https://aclanthology.org/2023.emnlp-main.298/>.
- Allen Institute for AI. Dolma2 tokenizer, 2024. <https://huggingface.co/allenai/dolma2-tokenizer/blob/5292e5d6c0f40b67cc765fe41bec991cf4345b5c/README.md>. Tokenizer repository created July 12, 2024; revision 5292e5d6c0f40b67cc765fe41bec991cf4345b5c; accessed 2026-09-19.
- Jason Ansel, Edward Yang, Horace He, Natalia Gimelshein, Animesh Jain, Michael Voznesensky, Bin Bao, Peter Bell, David Berard, Evgeni Burovski, et al. PyTorch 2: Faster machine learning through dynamic Python bytecode transformation and graph compilation. In *Proceedings of the 29th ACM International Conference on Architectural Support for Programming Languages and Operating Systems, Volume 2*, pages 929–947, 2024. <https://doi.org/10.1145/3620665.3640366>.
- Jacob Austin, Sholto Douglas, Roy Frostig, Anselm Levskaya, et al. All about rooflines. How To Scale Your Model, Part 1, 2025. <https://jax-ml.github.io/scaling-book/roofline/>. Published 2025-02-04; accessed 2026-09-18.
- Sridutt Bhalachandra, Brian Austin, Samuel Williams, and Nicholas J. Wright. Understanding the impact of input entropy on FPU, CPU, and GPU power. *arXiv preprint arXiv:2212.08805*, 2022. doi: 10.48550/arXiv.2212.08805. <https://arxiv.org/abs/2212.08805>.
- Tianqi Chen, Bing Xu, Chiyuan Zhang, and Carlos Guestrin. Training deep nets with sublinear memory cost. *arXiv preprint arXiv:1604.06174*, 2016. <https://arxiv.org/abs/1604.06174>.
- Aakanksha Chowdhery et al. PaLM: Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240):1–113, 2023. <https://jmlr.org/papers/v24/22-1144.html>.
- Aidan Clark, Diego De Las Casas, Aurelia Guy, Arthur Mensch, Michela Paganini, Jordan Hoffmann, Bogdan Damoc, Blake Hechtman, Trevor Cai, Sebastian Borgeaud, George Bm Van Den Driessche, Eliza Rutherford, Tom Hennigan, Matthew J. Johnson, Albin Cassirer, Chris Jones, Elena Buchatskaya, David Budden, Laurent Sifre, Simon Osindero, Oriol Vinyals, Marc’Aurelio Ranzato, Jack Rae, Erich Elsen, Koray Kavukcuoglu, and Karen Simonyan. Unified scaling laws for routed language models. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 4057–4086. PMLR, 2022. <https://proceedings.mlr.press/v162/clark22a.html>.
- Damai Dai, Chengqi Deng, Chenggang Zhao, R. X. Xu, Huazuo Gao, Deli Chen, Jiashi Li, Wangding Zeng, Xingkai Yu, Y. Wu, Zhenda Xie, Y. K. Li, Panpan Huang, Fuli Luo, Chong Ruan, Zhifang Sui, and Wenfeng Liang. DeepSeekMoE: Towards ultimate expert specialization in mixture-of-experts language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1280–1297, 2024. doi: 10.18653/v1/2024.acl-long.70. <https://aclanthology.org/2024.acl-long.70/>.
- Tri Dao, Dan Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. FlashAttention: Fast and memory-efficient exact attention with IO-awareness. In *Advances in Neural Information Processing Systems*, volume 35, 2022. https://proceedings.neurips.cc/paper_files/paper/2022/hash/67d57c32e20fd0a7a302cb81d36e40d5-Abstract-Conference.html.
- Databricks. MegaBlocks source code. GitHub, 2026. <https://github.com/databricks/megablocks/tree/952db33d6eac334d22c61e47a0d5d41446298784>. Router and shared-expert merge paths audited at commit 952db33d6eac334d22c61e47a0d5d41446298784.
- Databricks AI Research Team. Introducing DBRX: A new state-of-the-art open LLM, March 2024. <https://www.databricks.com/blog/introducing-dbrx-new-state-art-open-llm>.

- DeepSeek-AI. DeepSeek-V3 reference implementation. GitHub, 2025a. <https://github.com/deepseek-ai/DeepSeek-V3/tree/9b4e9788e4a3a731f7567338ed15d3ec549ce03b>. Released inference implementation audited at commit 9b4e9788e4a3a731f7567338ed15d3ec549ce03b.
- DeepSeek-AI. DualPipe: Bidirectional pipeline parallelism for computation–communication overlap. GitHub, 2025b. <https://github.com/deepseek-ai/DualPipe/tree/030ce4325f4ebeb437da4ebc6d00a70469dd58ae>. Parameter-memory comparison audited at commit 030ce4325f4ebeb437da4ebc6d00a70469dd58ae.
- DeepSeek-AI. DeepEP: Legacy low-latency and two-batch-overlap documentation, 2026. <https://github.com/deepseek-ai/DeepEP/blob/60d44037a702f651a6e18bd4aea65ed8409051c2/docs/legacy.md>. Commit 60d44037a702f651a6e18bd4aea65ed8409051c2; accessed 2026-07-13.
- DeepSeek-AI et al. DeepSeek-V3 technical report. Technical Report arXiv:2412.19437v2, DeepSeek-AI, 2024. <https://arxiv.org/abs/2412.19437v2>.
- DeepSeek-AI et al. DeepSeek-V4: Towards highly efficient million-token context intelligence. *arXiv preprint arXiv:2606.19348*, 2026. doi: 10.48550/arXiv.2606.19348. <https://arxiv.org/abs/2606.19348>.
- Nan Du et al. GLaM: Efficient scaling of language models with mixture-of-experts. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 5547–5569, 2022. <https://proceedings.mlr.press/v162/du22c.html>.
- William Fedus, Barret Zoph, and Noam Shazeer. Switch Transformers: Scaling to trillion parameter models with simple and efficient sparsity. *Journal of Machine Learning Research*, 23(120):1–39, 2022. <https://www.jmlr.org/papers/v23/21-0998.html>.
- Trevor Gale, Deepak Narayanan, Cliff Young, and Matei Zaharia. MegaBlocks: Efficient sparse training with mixture-of-experts. In *Proceedings of Machine Learning and Systems*, volume 5, pages 288–304, 2023. https://proceedings.mlsys.org/paper_files/paper/2023/hash/5a54f79333768effe7e8927bccffe40-Abstract-mlsys2023.html.
- Gemma Team. Gemma 4 model card, 2026. https://ai.google.dev/gemma/docs/core/model_card_4.
- GLM-5 Team et al. GLM-5: From vibe coding to agentic engineering. *arXiv preprint arXiv:2602.15763*, 2026. doi: 10.48550/arXiv.2602.15763. <https://arxiv.org/abs/2602.15763>.
- Theo Gregersen, Pratyush Patel, and Esha Choukse. Input-dependent power usage in GPUs. In *SC24-W: Workshops of the International Conference for High Performance Computing, Networking, Storage and Analysis*, pages 1872–1877. IEEE, 2024. doi: 10.1109/SCW63240.2024.00235. <https://arxiv.org/abs/2409.18324>.
- Daya Guo et al. DeepSeek-R1 incentivizes reasoning in LLMs through reinforcement learning. *Nature*, 645:633–638, 2025. doi: 10.1038/s41586-025-09422-z. <https://doi.org/10.1038/s41586-025-09422-z>.
- Alexander Hägele, Elie Bakouch, Atli Kosson, Loubna Ben Allal, Leandro von Werra, and Martin Jaggi. Scaling laws and compute-optimal training beyond fixed training durations. In *Advances in Neural Information Processing Systems*, volume 37, pages 76232–76264, 2024. https://proceedings.neurips.cc/paper_files/paper/2024/hash/8b970e15a89bf5d12542810df8eae8fc-Abstract-Conference.html.
- Ethan He, Abhinav Khattar, Ryan Prenger, Vijay Korthikanti, Zijie Yan, Tong Liu, Shiqing Fan, Ashwath Aithal, Mohammad Shoeybi, and Bryan Catanzaro. Upcycling large language models into mixture of experts. Technical Report 2410.07524, arXiv, 2024. <https://arxiv.org/abs/2410.07524>.
- Elad Hoffer, Itay Hubara, and Daniel Soudry. Train longer, generalize better: Closing the generalization gap in large batch training of neural networks. In *Advances in Neural Information Processing Systems*, volume 30, 2017. <https://proceedings.neurips.cc/paper/2017/hash/a5e0ff62be0b08456fc7f1e88812af3d-Abstract.html>.
- Shengding Hu, Yuge Tu, Xu Han, Chaoqun He, Ganqu Cui, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Weilin Zhao, et al. MiniCPM: Unveiling the potential of small language models with scalable training strategies. Technical Report 2404.06395, arXiv, 2024. <https://arxiv.org/abs/2404.06395>.
- Howard Huang, Will Constable, Ke Wen, Jeffrey Wan, Haoci Zhang, Dong Li, and Weiwei Chu. Training with zero-bubble pipeline parallelism. PyTorch Forums, Distributed with TorchTitan, 2024. <https://discuss.pytorch.org/t/distributed-w-torchtitan-training-with-zero-bubble-pipeline-parallelism/214420>. Accessed 2026-07-13.
- Yanping Huang, Youlong Cheng, Ankur Bapna, Orhan Firat, Dehao Chen, Mia Chen, HyoukJoong Lee, Jiquan Ngiam, Quoc V. Le, Yonghui Wu, and Zhifeng Chen. GPipe: Efficient training of giant neural networks using

- pipeline parallelism. In *Advances in Neural Information Processing Systems*, volume 32, 2019. <https://proceedings.neurips.cc/paper/2019/hash/093f65e080a295f8076b1c5722a46aa2-Abstract.html>.
- Hugging Face. Qwen3.5-MoE implementation in Transformers. GitHub, 2026. https://github.com/huggingface/transformers/blob/01dd2fd817a51a67eeb9126233faf9cbb380a17c/src/transformers/models/qwen3_5_moe/modeling_qwen3_5_moe.py. Audited at commit 01dd2fd817a51a67eeb9126233faf9cbb380a17c.
- Changho Hwang, Wei Cui, Yifan Xiong, Ziyue Yang, Ze Liu, Han Hu, Zilong Wang, Rafael Salas, Jithin Jose, Prabhat Ram, HoYuen Chau, Peng Cheng, Fan Yang, Mao Yang, and Yongqiang Xiong. Tutel: Adaptive mixture-of-experts at scale. In *Proceedings of Machine Learning and Systems*, volume 5, pages 269–287, 2023. https://proceedings.mlsys.org/paper_files/paper/2023/hash/5616d34cf8ff73942cf5aa922842556-Abstract-mlsys2023.html.
- Robert A. Jacobs, Michael I. Jordan, Steven J. Nowlan, and Geoffrey E. Hinton. Adaptive mixtures of local experts. *Neural Computation*, 3(1):79–87, 1991. doi: 10.1162/neco.1991.3.1.79. <https://doi.org/10.1162/neco.1991.3.1.79>.
- Sam Ade Jacobs, Masahiro Tanaka, Chengming Zhang, Minjia Zhang, Shuaiwen Leon Song, Samyam Rajbhandari, and Yuxiong He. DeepSpeed Ulysses: System optimizations for enabling training of extreme long sequence transformer models. Technical Report arXiv:2309.14509v2, Microsoft, 2023. <https://arxiv.org/abs/2309.14509v2>. Version 2.
- Paras Jain, Ajay Jain, Aniruddha Nrusimha, Amir Gholami, Pieter Abbeel, Joseph E. Gonzalez, Kurt Keutzer, and Ion Stoica. Checkmate: Breaking the memory wall with optimal tensor rematerialization. In *Proceedings of Machine Learning and Systems*, volume 2, pages 497–511, 2020. https://proceedings.mlsys.org/paper_files/paper/2020/hash/0b816ae8f06f8dd3543dc3d9ef196cab-Abstract.html.
- Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024a. doi: 10.48550/arXiv.2401.04088. <https://arxiv.org/abs/2401.04088>.
- Chenyu Jiang, Ye Tian, Zhen Jia, Shuai Zheng, Chuan Wu, and Yida Wang. Lancet: Accelerating mixture-of-experts training via whole graph computation-communication overlapping. In *Proceedings of Machine Learning and Systems*, volume 6, pages 74–86, 2024b. https://proceedings.mlsys.org/paper_files/paper/2024/hash/339caf45a6fa281cae8adc6465343464-Abstract-Conference.html.
- Chao Jin, Ziheng Jiang, Zhihao Bai, Zheng Zhong, Juncai Liu, Xiang Li, Ningxin Zheng, Xi Wang, Cong Xie, Qi Huang, Wen Heng, Yiyuan Ma, Wenlei Bao, Size Zheng, Yanghua Peng, Haibin Lin, Xuanzhe Liu, Xin Jin, and Xin Liu. MegaScale-MoE: Large-scale communication-efficient training of mixture-of-experts models in production. *arXiv preprint arXiv:2505.11432*, 2025. <https://arxiv.org/abs/2505.11432>.
- Keller Jordan, Yuchen Jin, Vlado Boza, Jiacheng You, Franz Cesista, Laker Newhouse, and Jeremy Bernstein. Muon: An optimizer for hidden layers in neural networks, 2024. <https://kellerjordan.github.io/posts/muon/>.
- Michael I. Jordan and Robert A. Jacobs. Hierarchical mixtures of experts and the EM algorithm. *Neural Computation*, 6(2):181–214, 1994. doi: 10.1162/neco.1994.6.2.181. <https://doi.org/10.1162/neco.1994.6.2.181>.
- Kimi Team. Kimi K3: Open frontier intelligence, 2026. https://github.com/MoonshotAI/Kimi-K3/blob/main/k3_tech_report.pdf.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015. <https://arxiv.org/abs/1412.6980>.
- Aran Komatsuzaki, Joan Puigcerver, James Lee-Thorp, Carlos Riquelme, Basil Mustafa, Joshua Ainslie, Yi Tay, Mostafa Dehghani, and Neil Houlsby. Sparse upcycling: Training mixture-of-experts from dense checkpoints. In *International Conference on Learning Representations*, 2023. <https://openreview.net/forum?id=T5nUQDrM4u>.
- Vijay Anand Korthikanti, Jared Casper, Sangkug Lym, Lawrence McAfee, Michael Andersch, Mohammad Shoeybi, and Bryan Catanzaro. Reducing activation recomputation in large transformer models. In *Proceedings of Machine Learning and Systems*, volume 5, pages 341–353, 2023. https://proceedings.mlsys.org/paper_files/paper/2023/hash/80083951326cf5b35e5100260d64ed81-Abstract-mlsys2023.html.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with PagedAttention. In

- Proceedings of the 29th Symposium on Operating Systems Principles (SOSP)*, pages 611–626, 2023. doi: 10.1145/3600006.3613165.
- Nathan Lambert, Jacob Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James V. Miranda, Alisa Liu, Nouha Dziri, Shane Lyu, et al. Tülu 3: Pushing frontiers in open language model post-training. Technical Report 2411.15124, arXiv, 2024. <https://arxiv.org/abs/2411.15124>.
- Robert Tjarko Lange, Yuki Imajuku, and Edoardo Cetin. ShinkaEvolve: Towards open-ended and sample-efficient program evolution. In *The Fourteenth International Conference on Learning Representations*, 2026. <https://openreview.net/forum?id=lKEdGCoDNC>.
- Seonho Lee, Jihwan Oh, Junkyum Kim, Seokjin Go, Jongse Park, and Divya Mahajan. Characterizing compute-communication overlap in GPU-accelerated distributed deep learning: Performance and power implications. Technical Report arXiv:2507.03114v1, arXiv, 2025. <https://arxiv.org/abs/2507.03114v1>.
- Dmitry Lepikhin, HyounJoong Lee, Yuanzhong Xu, Dehao Chen, Orhan Firat, Yanping Huang, Maxim Krikun, Noam Shazeer, and Zhifeng Chen. GShard: Scaling giant models with conditional computation and automatic sharding. In *International Conference on Learning Representations*, 2021. <https://openreview.net/forum?id=qrwe7XHTmYb>.
- Mike Lewis, Shruti Bhosale, Tim Dettmers, Naman Goyal, and Luke Zettlemoyer. BASE layers: Simplifying training of large, sparse models. In *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 6265–6274, 2021. <https://proceedings.mlr.press/v139/lewis21a.html>.
- Shen Li, Yanli Zhao, Rohan Varma, Omkar Salpekar, Pieter Noordhuis, Teng Li, Adam Paszke, Jeff Smith, Brian Vaughan, Pritam Damania, and Soumith Chintala. PyTorch Distributed: Experiences on accelerating data parallel training. *Proceedings of the VLDB Endowment*, 13(12):3005–3018, 2020. doi: 10.14778/3415478.3415530. <https://www.vldb.org/pvldb/vol13/p3005-li.pdf>.
- Xinyu Lian, Sam Ade Jacobs, Lev Kurilenko, Masahiro Tanaka, Stas Bekman, Olatunji Ruwase, and Minjia Zhang. Universal checkpointing: A flexible and efficient distributed checkpointing system for Large-Scale DNN training with reconfigurable parallelism. In *2025 USENIX Annual Technical Conference (USENIX ATC 25)*, pages 1519–1534. USENIX Association, 2025. <https://www.usenix.org/conference/atc25/presentation/lian>.
- Seng Pei Liew, Takuya Kato, and Sho Takase. Scaling laws for upcycling mixture-of-experts language models. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 37682–37704, 2025. <https://proceedings.mlr.press/v267/liew25a.html>.
- Dennis Liu, Zijie Yan, Xin Yao, Tong Liu, Vijay Korthikanti, Evan Wu, Shiqing Fan, Gao Deng, Hongxiao Bai, Jianbin Chang, Ashwath Aithal, Michael Andersch, Mohammad Shoeybi, Jiajie Yao, Chandler Zhou, David Wu, Xipeng Li, and June Yang. MoE Parallel Folding: Heterogeneous parallelism mappings for efficient large-scale MoE model training with Megatron Core. Technical Report arXiv:2504.14960v3, NVIDIA, 2025a. <https://arxiv.org/abs/2504.14960v3>. Version 3.
- Hao Liu, Matei Zaharia, and Pieter Abbeel. RingAttention with blockwise transformers for near-infinite context. In *The Twelfth International Conference on Learning Representations*, 2024. <https://openreview.net/forum?id=WsRHpHH4s0>.
- Jingyuan Liu, Jianlin Su, Xingcheng Yao, Zhejun Jiang, Guokun Lai, Yulun Du, Yidao Qin, Weixin Xu, Enzhe Lu, Junjie Yan, et al. Muon is scalable for LLM training. Technical Report 2502.16982, arXiv, 2025b. <https://arxiv.org/abs/2502.16982>.
- Yuxi Liu. Mixture of experts. Yuxi on the Wired, January 2024. <https://yuxi.ml/essays/mixture-of-experts>. Published 2024-01-23; accessed 2026-07-15.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019. <https://openreview.net/forum?id=Bkg6RiCqY7>.
- Jan Lucas and Ben Juurlink. ALUPower: Data dependent power consumption in GPUs. In *2016 IEEE 24th International Symposium on Modeling, Analysis and Simulation of Computer and Telecommunication Systems*, pages 95–104, 2016. doi: 10.1109/MASCOTS.2016.21. <https://doi.org/10.1109/MASCOTS.2016.21>.
- Jan Ludziejewski, Jakub Krajewski, Kamil Adamczewski, Maciej Pióro, Michał Krutul, Szymon Antoniak, Kamil Ciebia, Krystian Król, Tomasz Odrzygóźdź, Piotr Sankowski, Marek Cygan, and Sebastian Jaszczur. Scaling laws for fine-grained mixture of experts. In *Proceedings of the 41st International Conference on Machine Learning*,

- volume 235 of *Proceedings of Machine Learning Research*, pages 33270–33288. PMLR, 2024. <https://proceedings.mlr.press/v235/ludziejewski24a.html>.
- Minxuan Lv, Zhenpeng Su, Lei Yu Pan, Yizhe Xiong, Zijia Lin, Hui Chen, Wei Zhou, Jungong Han, Guiguang Ding, Wenwu Ou, Di Zhang, Kun Gai, and Songlin Hu. DSMoE: Matrix-partitioned experts with dynamic routing for computation-efficient dense LLMs. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 19711–19722, 2025. doi: 10.18653/v1/2025.emnlp-main.997. <https://aclanthology.org/2025.emnlp-main.997/>.
- Jiaqi Ma, Zhe Zhao, Xinyang Yi, Jilin Chen, Lichan Hong, and Ed H. Chi. Modeling task relationships in multi-task learning with multi-gate mixture-of-experts. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1930–1939, 2018. doi: 10.1145/3219819.3220007. <https://doi.org/10.1145/3219819.3220007>.
- Sadhika Malladi, Kaifeng Lyu, Abhishek Panigrahi, and Sanjeev Arora. On the SDEs and scaling rules for adaptive gradient algorithms. In *Advances in Neural Information Processing Systems*, volume 35, pages 7697–7711, 2022. https://proceedings.neurips.cc/paper_files/paper/2022/hash/32ac710102f0620d0f28d5d05a44fe08-Abstract.html.
- Pak Markthub, Jim Dinan, Sreeram Potluri, and Seth Howell. Improving network performance of HPC systems using NVIDIA Magnum IO NVSHMEM and GPUDirect Async. NVIDIA Technical Blog, November 2022. <https://developer.nvidia.com/blog/improving-network-performance-of-hpc-systems-using-nvidia-magnum-io-nvshmem-and-gpudirect-async/>. Published 2022-11-22; InfiniBand GPUDirect Async section and Figure 2; accessed 2026-09-19.
- Sam McCandlish, Jared Kaplan, Dario Amodei, and OpenAI Dota Team. An empirical model of large-batch training. Technical Report arXiv:1812.06162, OpenAI, 2018. <https://arxiv.org/abs/1812.06162>.
- Will Merrill, Shane Arora, Dirk Groeneveld, and Hanna Hajishirzi. Critical batch size revisited: A simple empirical approach to large-batch language model training. In *Advances in Neural Information Processing Systems*, volume 38, pages 116936–116959, 2025. https://proceedings.neurips.cc/paper_files/paper/2025/hash/a99f732df9b668284b449da0214a3286-Abstract-Conference.html.
- Meta AI. The Llama 4 herd: The beginning of a new era of natively multimodal AI innovation, April 2025. <https://ai.meta.com/blog/llama-4-multimodal-intelligence/>.
- Paulius Micekevicius, Sharan Narang, Jonah Alben, Gregory Diamos, Erich Elsen, David Garcia, Boris Ginsburg, Michael Houston, Oleksii Kuchaiev, Ganesh Venkatesh, and Hao Wu. Mixed precision training. In *International Conference on Learning Representations*, 2018. <https://openreview.net/forum?id=r1gs9JgRZ>.
- Paulius Micekevicius, Dusan Stosic, Neil Burgess, Marius Cornea, Pradeep Dubey, Richard Grisenthwaite, Sangwon Ha, Alexander Heinecke, Patrick Judd, John Kamalu, Naveen Mellempudi, Stuart Oberman, Mohammad Shoeybi, Michael Siu, and Hao Wu. FP8 formats for deep learning. *arXiv preprint arXiv:2209.05433*, 2022. <https://arxiv.org/abs/2209.05433>.
- MiniMax. MiniMax-M3 model card, 2026. <https://huggingface.co/MiniMaxAI/MiniMax-M3>. Accessed 2026-07-10.
- Asit Mishra, Dusan Stosic, and Simon Layton. Recipes for pre-training LLMs with MXFP8. Technical Report arXiv:2506.08027v1, arXiv, 2025. <https://arxiv.org/abs/2506.08027v1>. Version 1.
- Mistral AI. Mistral Inference. GitHub, 2026. <https://github.com/mistralai/mistral-inference/tree/9eae91c17450e09021b6065a1d5cc69876507c8>. Mixtral routing implementation audited at commit 9eae91c17450e09021b6065a1d5cc69876507c8.
- Mistral AI Team. Mixtral of experts, December 2023. <https://mistral.ai/news/mixtral-of-experts/>. Release announcement, December 11, 2023; accessed 2026-09-19.
- Moonshot AI. Kimi-K2.5 model card, 2026. <https://huggingface.co/moonshotai/Kimi-K2.5/blob/4d01dfe0332d63057c186e0b262165819efb6611/README.md>. Model Summary; revision 4d01dfe0332d63057c186e0b262165819efb6611; accessed 2026-09-19.
- Niklas Muennighoff, Luca Soldaini, Dirk Groeneveld, Kyle Lo, Jacob Morrison, Sewon Min, Weijia Shi, Pete Walsh, Oyvind Tafjord, Nathan Lambert, Yuling Gu, Shane Arora, Akshita Bhagia, Dustin Schwenk, David Wadden, Alexander Wettig, Binyuan Hui, Tim Dettmers, Douwe Kiela, Ali Farhadi, Noah A. Smith, Pang Wei Koh, Amanpreet Singh, and Hannaneh Hajishirzi. OLMoE: Open mixture-of-experts language models. *arXiv preprint arXiv:2409.02060*, 2024. doi: 10.48550/arXiv.2409.02060. <https://arxiv.org/abs/2409.02060>.

- Taishi Nakamura, Takuya Akiba, Kazuki Fujii, Yusuke Oda, Rio Yokota, and Jun Suzuki. Drop-upcycling: Training sparse mixture of experts with partial re-initialization. In *International Conference on Learning Representations*, 2025. https://proceedings.iclr.cc/paper_files/paper/2025/hash/d24b7366d714b09a977946ef0d9bf3ad-Abstract-Conference.html.
- Deepak Narayanan, Aaron Harlap, Amar Phanishayee, Vivek Seshadri, Nikhil R. Devanur, Gregory R. Ganger, Phillip B. Gibbons, and Matei Zaharia. PipeDream: Generalized pipeline parallelism for DNN training. In *Proceedings of the 27th ACM Symposium on Operating Systems Principles*, pages 1–15, 2019. doi: 10.1145/3341301.3359646. <https://doi.org/10.1145/3341301.3359646>.
- Deepak Narayanan, Mohammad Shoeybi, Jared Casper, Patrick LeGresley, Mostofa Patwary, Vijay Anand Korthikanti, Dmitri Vainbrand, Prethvi Kashinkunti, Julie Bernauer, Bryan Catanzaro, Amar Phanishayee, and Matei Zaharia. Efficient large-scale language model training on GPU clusters using Megatron-LM. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, pages 1–15, 2021. doi: 10.1145/3458817.3476209. <https://doi.org/10.1145/3458817.3476209>.
- NVIDIA. Parallel Thread Execution ISA 8.8, 2025a. <https://docs.nvidia.com/cuda/archive/12.9.1/parallel-thread-execution/index.html>. CUDA 12.9.1 archive; accessed 2026-07-13.
- NVIDIA. NVIDIA RTX PRO Blackwell GPU Architecture. Technical report, NVIDIA Corporation, 2025b. https://www.nvidia.com/content/dam/en-zz/Solutions/design-visualization/quadro-product-literature/pdf/NVIDIA-RTX-Blackwell-PRO-GPU-Architecture-v1_1.pdf. Version 1.1; accessed 2026-07-13.
- NVIDIA. CUDA GPUDirect RDMA, 2026a. <https://docs.nvidia.com/cuda/gpudirect-rdma/index.html>. Accessed 2026-07-13.
- NVIDIA. Components. NVIDIA HGX AI Factory Enterprise Reference Architecture, 2026b. <https://docs.nvidia.com/enterprise-reference-architectures/hgx-ai-factory/latest/components.html>. Accessed 2026-07-13.
- NVIDIA. Megatron Core TransformerConfig API. Developer documentation, 2026c. https://docs.nvidia.com/megatron-core/developer-guide/latest/apidocs/core/core.transformer.transformer_config.html. Documents expert-level and expert-rank MoE capacity factors; accessed 2026-07-16.
- NVIDIA. Megatron-LM, 2026d. <https://github.com/NVIDIA/Megatron-LM>. MoE merge paths audited at commit 48a887fec01674346f724dcf44f417f455989f0; standard distributed-optimizer layout audited at commit 4bf7fca050ae55ef58e299003fd12d769aac81e0.
- NVIDIA. Megatron-LM: Buffered global load-balancing loss implementation. Source code, 2026e. <https://github.com/NVIDIA/Megatron-LM/tree/addc601f57ed539506183b704bb9d08f459d7f50/megatron/core/transformer/moe>. router.py and moe_utils.py; commit addc601f57ed539506183b704bb9d08f459d7f50; accessed 2026-09-19.
- NVIDIA. NCCL collective operations, 2026f. <https://docs.nvidia.com/deeplearning/nccl/user-guide/docs/usage/collectives.html>. Accessed 2026-07-13.
- NVIDIA. Nemotron 3 Ultra: Open, efficient mixture-of-experts hybrid Mamba-transformer model for agentic reasoning. Technical Report arXiv:2606.15007, NVIDIA, 2026g. <https://arxiv.org/abs/2606.15007>.
- NVIDIA. NVSHMEM memory model, 2026h. <https://docs.nvidia.com/nvshmem/api/gen/mem-model.html>. Accessed 2026-07-13.
- NVIDIA. Quantum-X800 InfiniBand Platform, 2026i. <https://www.nvidia.com/en-us/networking/products/infiniband/quantum-x800/>. Accessed 2026-07-13.
- NVIDIA. Blackwell SM100 GEMMs, 2026j. https://docs.nvidia.com/cutlass/latest/media/docs/cpp/blackwell_functionality.html. CUTLASS documentation; accessed 2026-07-13.
- NVIDIA. CUDA Programming Guide: Asynchronous execution, 2026k. <https://docs.nvidia.com/cuda/cuda-programming-guide/02-basics/asynchronous-execution.html>. Accessed 2026-07-12.

- NVIDIA. CUDA Programming Guide: CUDA graphs, 2026l. <https://docs.nvidia.com/cuda/cuda-programming-guide/04-special-topics/cuda-graphs.html>. Accessed 2026-07-12.
- NVIDIA. CUTLASS: Grouped kernel schedulers, 2026m. https://docs.nvidia.com/cutlass/4.3.5/media/docs/cpp/grouped_scheduler.html. Accessed 2026-07-13.
- NVIDIA. CUTLASS SM120 grouped GEMM example, 2026n. https://github.com/NVIDIA/cutlass/blob/da5e086dab31d63815acafdac9a9c5893b1c69e2/examples/79_blackwell_geforce_gemm/79d_blackwell_geforce_nvfp4_grouped_gemm.cu. Pinned source snapshot bundled with the audited PyTorch tree; accessed 2026-07-15.
- NVIDIA. Compressible memory, 2026o. <https://docs.nvidia.com/cuda/cuda-programming-guide/04-special-topics/virtual-memory-management.html#compressible-memory>. CUDA Programming Guide; accessed 2026-07-13.
- NVIDIA. cuBLAS: 16/32-element 1D block scaling for FP8 and FP4 data types, 2026p. <https://docs.nvidia.com/cuda/cublas/#element-1d-block-scaling-for-fp8-and-fp4-data-types>. Accessed 2026-07-12.
- NVIDIA. NVIDIA H100 Tensor Core GPU product specifications, 2026q. <https://www.nvidia.com/en-us/data-center/h100/>. Accessed 2026-07-12.
- NVIDIA. NVIDIA HGX B200/B300 platform specifications, 2026r. <https://www.nvidia.com/en-us/data-center/hgx/>. Accessed 2026-09-18.
- NVIDIA. Hopper Tuning Guide: Inline compression, 2026s. <https://docs.nvidia.com/cuda/hopper-tuning-guide/index.html#inline-compression>. Section 1.4.2.3; accessed 2026-07-13.
- NVIDIA. NVSHMEM: Using NVSHMEM, 2026t. <https://docs.nvidia.com/nvshmem/api/using.html>. Accessed 2026-07-12.
- NVIDIA. tcgen05 MMA programming guide, 2026u. https://docs.nvidia.com/cutlass/latest/media/docs/pythonDSL/guides/mma/tcgen05_programming.html. CUTLASS documentation; accessed 2026-07-13.
- NVIDIA. TensorRT support matrix: GPU architecture and precision support, 2026v. <https://docs.nvidia.com/deeplearning/tensorrt/latest/getting-started/support-matrix.html>. Interactive multi-release matrix; TensorRT 10.14.1 rows consulted; accessed 2026-07-13.
- NVIDIA. Transformer Engine: MXFP8 training, 2026w. https://docs.nvidia.com/deeplearning/transformer-engine/features/low_precision_training/mxftp8/mxftp8.html. Transformer Engine 2.19.0 documentation; accessed 2026-09-19.
- Open Compute Project. OCP Microscaling Formats (MX) Specification, version 1.0. Technical report, Open Compute Project Foundation, 2023. <https://www.opencompute.org/documents/ocp-microscaling-formats-mx-v1-0-spec-final-pdf>.
- OpenAI. gpt-oss-120b & gpt-oss-20b model card. *arXiv preprint arXiv:2508.10925*, 2025. doi: 10.48550/arXiv.2508.10925. <https://arxiv.org/abs/2508.10925>.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. In *Advances in Neural Information Processing Systems*, volume 35, 2022. https://proceedings.neurips.cc/paper_files/paper/2022/hash/b1efde53be364a73914f58805a001731-Abstract-Conference.html.
- Pitch Patarasuk and Xin Yuan. Bandwidth optimal all-reduce algorithms for clusters of workstations. *Journal of Parallel and Distributed Computing*, 69(2):117–124, 2009. doi: 10.1016/j.jpdc.2008.09.002. <https://doi.org/10.1016/j.jpdc.2008.09.002>.
- PyTorch Contributors. Distributed data parallel notes, 2026a. <https://docs.pytorch.org/docs/stable/notes/ddp.html>. Accessed 2026-07-13.
- PyTorch Contributors. Distributed communication package: all_to_all_single, 2026b. <https://docs.pytorch.org/docs/stable/distributed.html>. Accessed 2026-07-13.

PyTorch Contributors. torch.distributed.tensor (DTensor), 2026c. <https://docs.pytorch.org/docs/stable/distributed.tensor.html>. Accessed 2026-08-29.

PyTorch Contributors. fully_shard: FSDP2 documentation, 2026d. https://docs.pytorch.org/docs/stable/distributed.fsdpy.fully_shard.html. Accessed 2026-07-13.

PyTorch Contributors. torch.utils.checkpoint, 2026e. <https://docs.pytorch.org/docs/stable/checkpoint.html>. Accessed 2026-07-13.

PyTorch Contributors. CUDA Semantics, 2026f. <https://docs.pytorch.org/docs/main/notes/cuda.html>. Accessed 2026-07-12.

PyTorch Contributors. torch.distributed.checkpoint, 2026g. <https://docs.pytorch.org/docs/stable/distributed.checkpoint.html>. Accessed 2026-07-13.

PyTorch Contributors. torch.empty documentation, 2026h. <https://docs.pytorch.org/docs/stable/generated/torch.empty.html>. Accessed 2026-07-13.

PyTorch Contributors. CUDA Grouped Matrix Multiplication Backend, 2026i. <https://github.com/pytorch/pytorch/blob/1c23e463efdf735913fab00c48f0d0e5f6e2282/aten/src/ATen/native/cuda/GroupedBlas.cpp>. Pinned source snapshot audited for this report; accessed 2026-07-15.

PyTorch Contributors. Grouped matrix multiplication fallback, 2026j. <https://github.com/pytorch/pytorch/blob/1c23e463efdf735913fab00c48f0d0e5f6e2282/aten/src/ATen/native/GroupedMMUtils.h>. Pinned source snapshot audited for this report; accessed 2026-07-15.

PyTorch Contributors. torch.nonzero, 2026k. <https://docs.pytorch.org/docs/stable/generated/torch.nonzero.html>. Accessed 2026-07-12.

PyTorch Contributors. torch.cuda.set_sync_debug_mode, 2026l. https://docs.pytorch.org/docs/stable/generated/torch.cuda.set_sync_debug_mode.html. Accessed 2026-07-12.

Penghui Qi, Xinyi Wan, Nyamdavaa Amar, and Min Lin. Pipeline parallelism with controllable memory. In *Advances in Neural Information Processing Systems*, volume 37, pages 46539–46566, 2024a. https://papers.nips.cc/paper_files/paper/2024/hash/527dad0b9159805289906d5740a0bdd3-Abstract-Conference.html.

Penghui Qi, Xinyi Wan, Guangxing Huang, and Min Lin. Zero bubble (almost) pipeline parallelism. In *International Conference on Learning Representations*, 2024b. <https://openreview.net/forum?id=tuzTN0eI05>.

Zihan Qiu, Zeyu Huang, Bo Zheng, Kaiyue Wen, Zekun Wang, Rui Men, Ivan Titov, Dayiheng Liu, Jingren Zhou, and Junyang Lin. Demons in the detail: On implementing load balancing loss for training specialized mixture-of-expert models. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5005–5018, Vienna, Austria, July 2025. Association for Computational Linguistics. doi: 10.18653/v1/2025.acl-long.249. <https://aclanthology.org/2025.acl-long.249/>.

Qwen Team. Qwen1.5-MoE: Matching 7B model performance with 1/3 activated parameters, 2024a. <https://qwenlm.github.io/blog/qwen-moe/>.

Qwen Team. Qwen1.5-MoE-A2.7B released model configuration, 2024b. <https://huggingface.co/Qwen/Qwen1.5-MoE-A2.7B/blob/1a758c50ecb6350748b9ce0a99d2352fd9fc11c9/config.json>. Revision 1a758c50ecb6350748b9ce0a99d2352fd9fc11c9; accessed 2026-09-19.

Qwen Team. Qwen2-57B-A14B released model configuration, 2024c. <https://huggingface.co/Qwen/Qwen2-57B-A14B/blob/f29d6a182178ddf39f68f403361779b2d37fdce8/config.json>. Revision f29d6a182178ddf39f68f403361779b2d37fdce8; accessed 2026-09-19.

Qwen Team. Qwen3.5-35B-A3B model card, 2026a. <https://huggingface.co/Qwen/Qwen3.5-35B-A3B>.

Qwen Team. Qwen3.5-397B-A17B model card, 2026b. <https://huggingface.co/Qwen/Qwen3.5-397B-A17B>.

Qwen Team, Alibaba Group, and Hugging Face Team. Qwen2 MoE implementation in Transformers, 2024. https://github.com/huggingface/transformers/blob/573565e35a5cc68f6cfb6337f5a93753ab16c65b/src/transformers/models/qwen2_moe/modeling_qwen2_moe.py. Transformers v4.41.2; commit 573565e35a5cc68f6cfb6337f5a93753ab16c65b; Qwen2MoeSparseMoeBlock; accessed 2026-09-19.

Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D. Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. In *Advances in Neural Information*

- Processing Systems*, volume 36, pages 53728–53741, 2023. https://proceedings.neurips.cc/paper_files/paper/2023/hash/a85b405ed65c6477a4fe8302b5e06ce7-Abstract-Conference.html.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020. <https://jmlr.org/papers/v21/20-074.html>.
- Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. ZeRO: Memory optimizations toward training trillion parameter models. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, pages 1–16, 2020. doi: 10.1109/SC41405.2020.00024. <https://doi.org/10.1109/SC41405.2020.00024>.
- Samyam Rajbhandari, Conglong Li, Zhewei Yao, Minjia Zhang, Reza Yazdani Aminabadi, Ammar Ahmad Awan, Jeff Rasley, and Yuxiong He. DeepSpeed-MoE: Advancing mixture-of-experts inference and training to power next-generation AI scale. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 18332–18346, 2022. <https://proceedings.mlr.press/v162/rajbhandari22a.html>.
- Minsoo Rhu, Natalia Gimelshein, Jason Clemons, Arslan Zulfiqar, and Stephen W. Keckler. vDNN: Virtualized deep neural networks for scalable, memory-efficient neural network design. In *49th Annual IEEE/ACM International Symposium on Microarchitecture (MICRO)*, pages 1–13, 2016. doi: 10.1109/MICRO.2016.7783721. <https://arxiv.org/abs/1602.08124>.
- Bitu Darvish Rouhani et al. Microscaling data formats for deep learning. *arXiv preprint arXiv:2310.10537*, 2023. <https://arxiv.org/abs/2310.10537>.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017. <https://arxiv.org/abs/1707.06347>.
- Christopher J. Shallue, Jaehoon Lee, Joseph Antognini, Jascha Sohl-Dickstein, Roy Frostig, and George E. Dahl. Measuring the effects of data parallelism on neural network training. *Journal of Machine Learning Research*, 20(112):1–49, 2019. <https://www.jmlr.org/papers/v20/18-789.html>.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024. <https://arxiv.org/abs/2402.03300>.
- Noam Shazeer. GLU variants improve transformer. *arXiv preprint arXiv:2002.05202*, 2020. <https://arxiv.org/abs/2002.05202>.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarczyk, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *International Conference on Learning Representations*, 2017. <https://openreview.net/forum?id=B1ckMDqlg>.
- Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. HybridFlow: A flexible and efficient RLHF framework. In *Proceedings of the Twentieth European Conference on Computer Systems*, pages 1279–1297, 2025. doi: 10.1145/3689031.3696075. <https://doi.org/10.1145/3689031.3696075>.
- Mohammad Shoeybi, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. Megatron-LM: Training multi-billion parameter language models using model parallelism. *arXiv preprint arXiv:1909.08053*, 2019. <https://arxiv.org/abs/1909.08053>.
- Snowflake AI Research. Snowflake Arctic: The best LLM for enterprise AI — efficiently intelligent, truly open, April 2024. <https://www.snowflake.com/en/blog/arctic-open-efficient-foundation-language-models-snowflake/>.
- Jianlin Su. MoE travelogue 2: On load imbalance. Scientific Spaces, February 2025. <https://spaces.ac.cn/archives/10735>. Blog post in Chinese, title translated; published 2025-02-21; accessed 2026-07-15.
- Hongyan Tang, Junnang Liu, Ming Zhao, and Xudong Gong. Progressive layered extraction (PLE): A novel multi-task learning (MTL) model for personalized recommendations. In *Fourteenth ACM Conference on Recommender Systems*, pages 269–278, 2020. doi: 10.1145/3383313.3412236. <https://doi.org/10.1145/3383313.3412236>.

- Team Olmo et al. Olmo 3. *arXiv preprint arXiv:2512.13961*, 2025. doi: 10.48550/arXiv.2512.13961. <https://arxiv.org/abs/2512.13961>.
- Philippe Tillet, H. T. Kung, and David Cox. Triton: An intermediate language and compiler for tiled neural network computations. In *Proceedings of the 3rd ACM SIGPLAN International Workshop on Machine Learning and Programming Languages*, pages 10–19, 2019. <https://doi.org/10.1145/3315508.3329973>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, volume 30, 2017. <https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fbd053c1c4a845aa-Abstract.html>.
- Lean Wang, Huazuo Gao, Chenggang Zhao, Xu Sun, and Damai Dai. Auxiliary-loss-free load balancing strategy for mixture-of-experts. *arXiv preprint arXiv:2408.15664*, 2024. <https://arxiv.org/abs/2408.15664>.
- Jason Wei, Maarten Bosma, Vincent Y. Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V. Le. Finetuned language models are zero-shot learners. In *International Conference on Learning Representations*, 2022. <https://openreview.net/forum?id=gEZrGCozdqR>.
- Xiaomi MiMo Team. MiMo-V2.5-Pro model card, 2026. <https://huggingface.co/XiaomiMiMo/MiMo-V2.5-Pro>.
- Zijie Yan, Hongxiao Bai, Xin Yao, Dennis Liu, Tong Liu, Hongbin Liu, Pingtian Li, Evan Wu, Shiqing Fan, Li Tao, Robin Zhang, Yuzhong Wang, Shifang Xu, Jack Chang, Xuwen Chen, Kunlun Li, Yan Bai, Gao Deng, Nan Zheng, Vijay Anand Korthikanti, Abhinav Khattar, Ethan He, Soham Govande, Sangkug Lym, Zhongbo Zhu, Qi Zhang, Haochen Yuan, Xiaowei Ren, Deyu Fu, Tailai Ma, Shunkang Zhang, Jiang Shao, Ray Wang, Vasudevan Rengasamy, Rachit Garg, Santosh Bhavani, Xipeng Li, Chandler Zhou, David Wu, Yingcan Wei, Ashwath Aithal, Michael Andersch, Mohammad Shoeybi, Jiajie Yao, and June Yang. Scalable training of mixture-of-experts models with Megatron Core. Technical Report arXiv:2603.07685v2, NVIDIA, 2026. <https://arxiv.org/abs/2603.07685v2>. Version 2.
- An Yang et al. Qwen2 technical report. *arXiv preprint arXiv:2407.10671*, 2024. doi: 10.48550/arXiv.2407.10671. <https://arxiv.org/abs/2407.10671>.
- An Yang et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025. doi: 10.48550/arXiv.2505.09388. <https://arxiv.org/abs/2505.09388>.
- Z.ai. GLM-5.2 model card and release, 2026. <https://huggingface.co/zai-org/GLM-5.2>. Expert configuration from the released model configuration; the 744B-A40B parameter figure from the model table of the GLM-5 repository.
- Shulai Zhang, Ningxin Zheng, Haibin Lin, Ziheng Jiang, Wenlei Bao, Chengquan Jiang, Qi Hou, Weihao Cui, Size Zheng, Li-Wen Chang, Quan Chen, and Xin Liu. COMET: Fine-grained computation-communication overlapping for mixture-of-experts. In *Proceedings of Machine Learning and Systems*, volume 7, 2025. https://proceedings.mlsys.org/paper_files/paper/2025/hash/e27ea0cd50b798ff8942caf9203f0992-Abstract-Conference.html.
- Zhengyan Zhang, Yankai Lin, Zhiyuan Liu, Peng Li, Maosong Sun, and Jie Zhou. MoEification: Transformer feed-forward layers are mixtures of experts. In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 877–890, 2022. doi: 10.18653/v1/2022.findings-acl.71. <https://aclanthology.org/2022.findings-acl.71/>.
- Chenggang Zhao, Zhean Xu, Liang Zhao, Jiashi Li, Chenhao Xu, Anyi Xu, Shengyu Liu, Kexing Zhou, and Kuai Yu. DeepGEMM: Clean and efficient BLAS kernel library on GPU. <https://github.com/deepseek-ai/DeepGEMM>, 2025a. Includes the fused Mega MoE expert-parallel megakernel; README audited on August 25, 2026.
- Chenggang Zhao, Shangyan Zhou, Liyue Zhang, Chengqi Deng, Zhean Xu, Yuxuan Liu, Kuai Yu, Jiashi Li, and Liang Zhao. DeepEP: An efficient expert-parallel communication library. <https://github.com/deepseek-ai/DeepEP>, 2025b. V2 documentation audited at commit 60d44037a702f651a6e18bd4aea65ed8409051c2.
- Yanli Zhao, Andrew Gu, Rohan Varma, Liang Luo, Chien-Chin Huang, Min Xu, Less Wright, Hamid Shojanazeri, Myle Ott, Sam Shleifer, Alban Desmaison, Can Balioglu, Pritam Damania, Bernard Nguyen, Geeta Chauhan, Yuchen Hao, Ajit Mathews, and Shen Li. PyTorch FSDP: Experiences on scaling fully sharded data parallel. *Proceedings of the VLDB Endowment*, 16(12):3848–3860, 2023. doi: 10.14778/3611540.3611569. <https://www.vldb.org/pvldb/vol16/p3848-huang.pdf>.

- Yanqi Zhou, Tao Lei, Hanxiao Liu, Nan Du, Yanping Huang, Vincent Zhao, Andrew M. Dai, Zhifeng Chen, Quoc V. Le, and James Laudon. Mixture-of-experts with expert choice routing. In *Advances in Neural Information Processing Systems*, volume 35, pages 7103–7114, 2022. https://proceedings.neurips.cc/paper_files/paper/2022/hash/2f00ecd787b432c1d36f3de9800728eb-Abstract-Conference.html.
- Barret Zoph, Irwan Bello, Sameer Kumar, Nan Du, Yanping Huang, Jeff Dean, Noam Shazeer, and William Fedus. ST-MoE: Designing stable and transferable sparse expert models. Technical Report 2202.08906, arXiv, 2022. <https://arxiv.org/abs/2202.08906>.